


Current Sensor

Product Series: STK-616T

Part number: STK-616T-40FB
STK-616T-65FB
STK-616T-66FC
STK-616T-100FB
STK-616T-133FU
STK-616T-30FB
STK-616T-30FC

Version: Ver 1.2

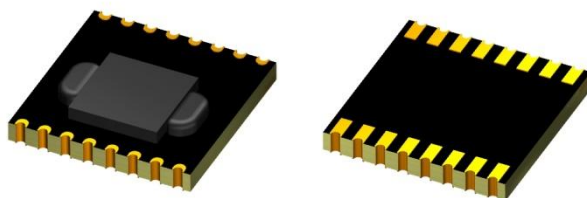

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Part number definition	3
3.	Temperature vs Current	4
4.	Functional Block Diagram	4
5.	Electrical data STK-616T-xxFB	5
6.	Electrical data STK-616T-xxFC	6
7.	Electrical data STK-616T-xxFU	7
8.	Dimension & Pin definitions without OCD function	8
9.	Dimension & Pin definitions with OCD function	9
10.	Pin definitions	10
11.	PCB layout recommendation	11
12.	Frequency bandwidth	12
13.	Step response time	12
14.	Typical Application of STK-616T	13
15.	Power on delay	13
16.	Examples of OCD function	15
17.	General information on OCD	16
18.	PACKAGE MATERIALS INFORMATION	18

1. Description

The STK-616T series current sensor is based on MR (magnetoresistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Inverter
- AC/DC, DC/DC power supplies
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	℃	-40 ~ 125
Storage temperature	T_stg	℃	-40 ~ 125
Mass	m	g	0.5

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	Vcc	V	6
ESD rating (HBM)	U_ESD	Kv	4
Junction temperature	T_J	℃	150

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter


Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	Ud	Kv	3.6	
Impulse withstand voltage 1.2/50μs	Ūw	Kv	6	
Clearance distance (pri. -sec)	Dci	mm	6	Determined by customer's layout
Creepage distance (pri. -sec)	dCp	mm	6	

Measuring current table


Product	Meas. Range I _{pn} (A)	Sensitivity (mV/A)	Vcc (V)	T (℃)
STK-616T-40FB-1-2.5-E-2-C-N	±40A	50	5	-40 ~ 125
STK-616T-65FB-1-2.5-E-2-C-N	±65A	30	5	-40 ~ 125
STK-616T-65FB-1-2.5-E-1-Z-N	±65A	30	5	-40 ~ 125
STK-616T-40FB-1-2.5-E-1-C-N	±40A	50	5	-40 ~ 125
STK-616T-133FU-0-1.65-X-X-X-N	+133A	19.8	3.3	-40 ~ 125
STK-616T-66FC-0-1.65-X-X-X-R	±66A	19.8	3.3	-40 ~ 125
STK-616T-100FB-1-2.5-E-2-C-R	±100A	20	5	-40 ~ 125
STK-616T-30FB-1-2.5-E-2-C-R	±30A	66.67	5	-40 ~ 125

STK-616T-30FC-1-1.65-E-2-C-R	±30A	44	3.3	-40 ~ 125
------------------------------	------	----	-----	-----------


2. Part number definition

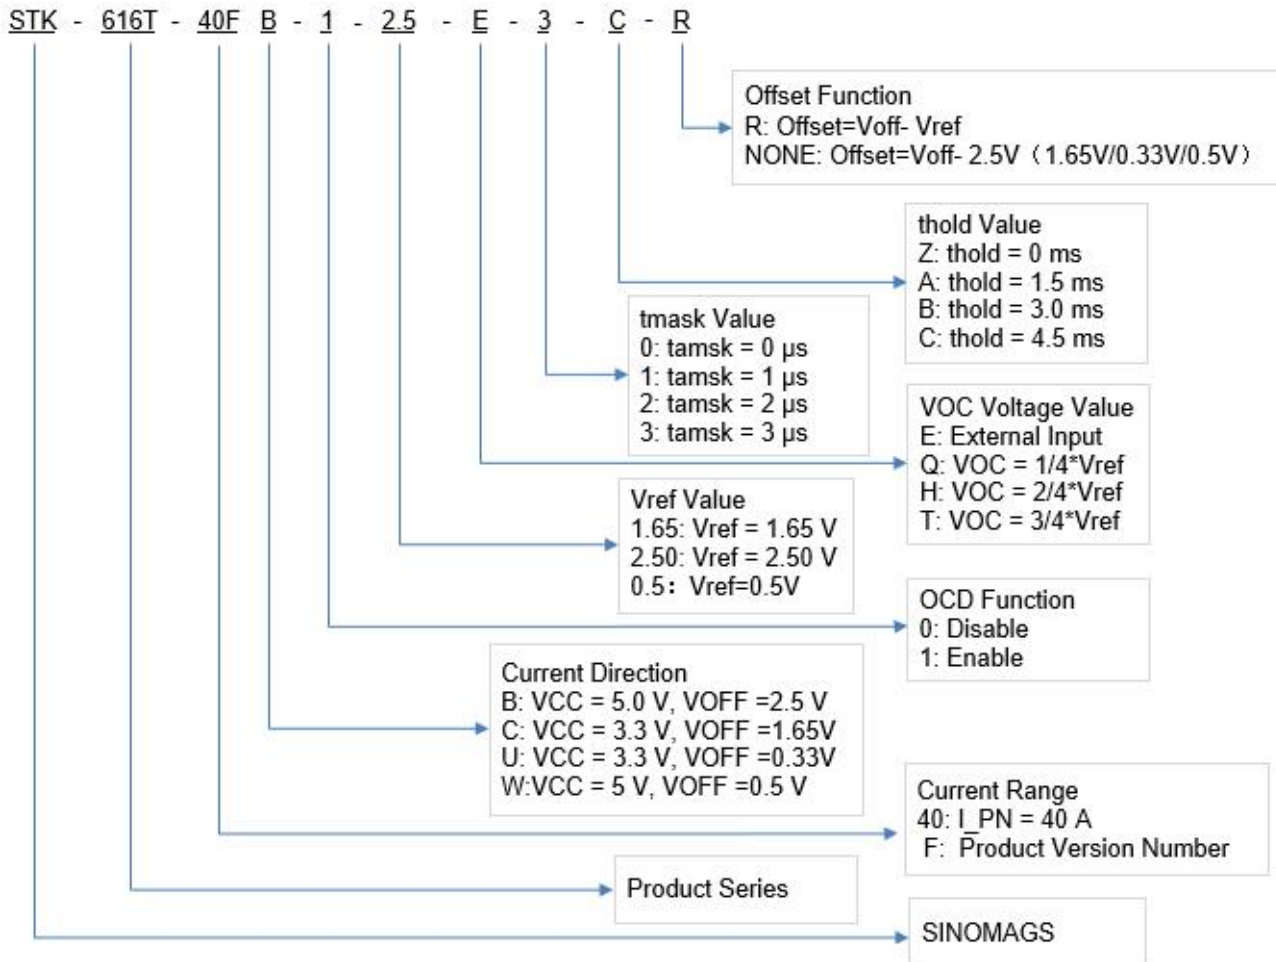

3. Temperature vs Current

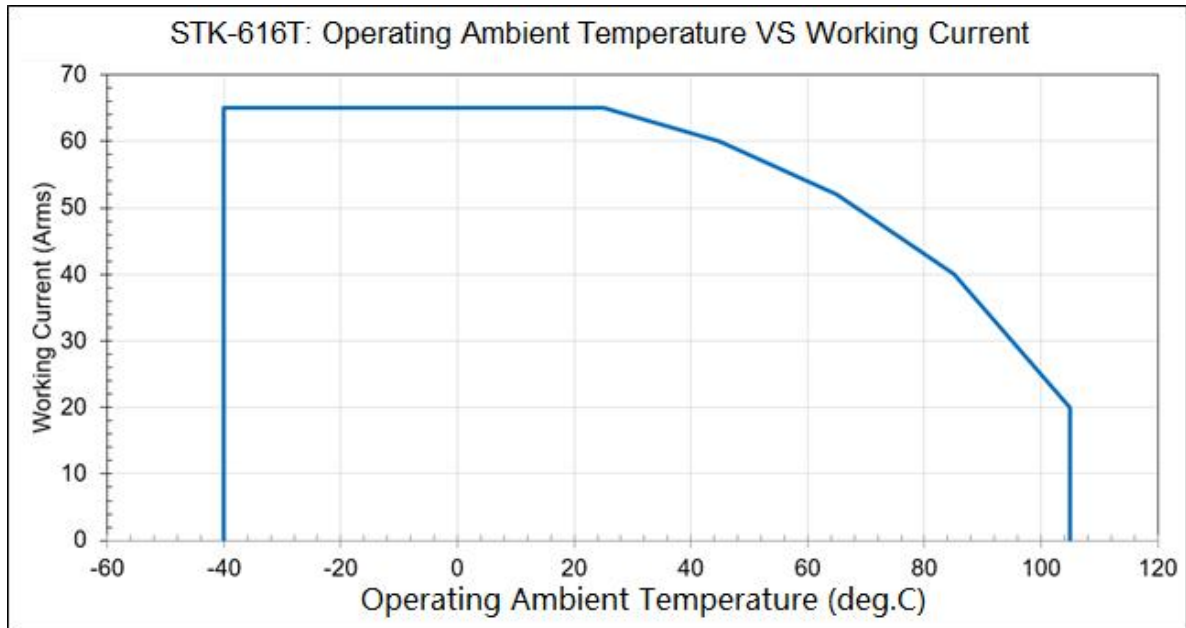

4. Functional Block Diagram

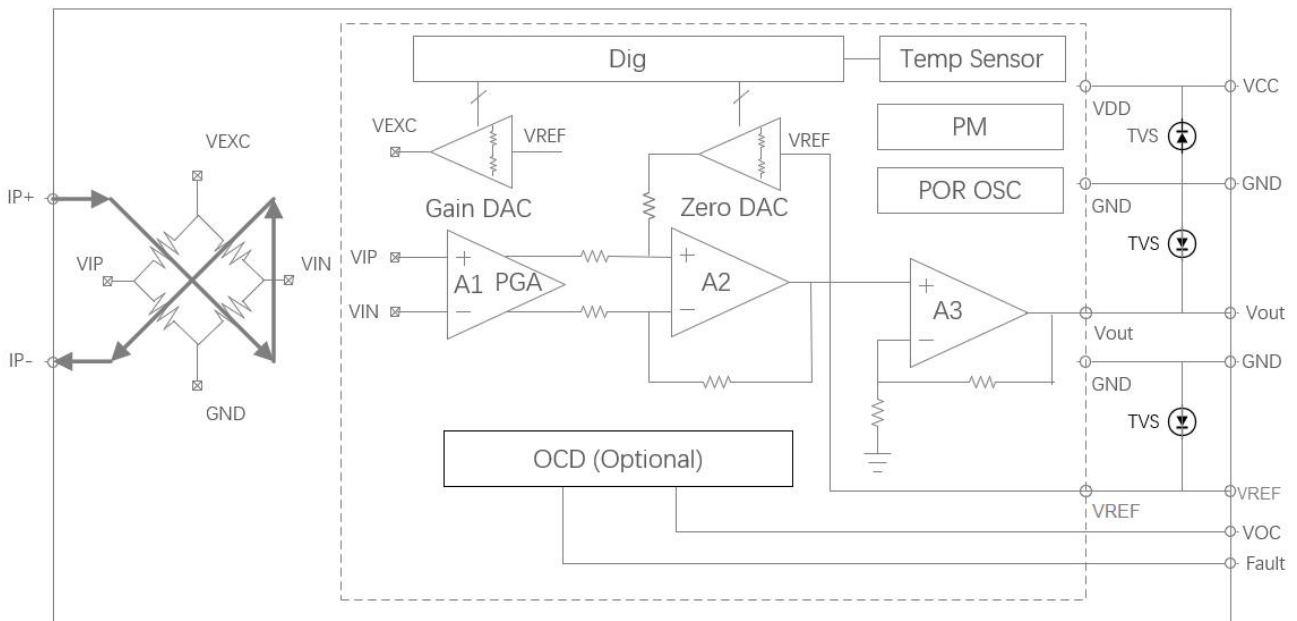

5. Electrical data STK-616T-xxFB

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-40		40	STK-616T-40FB
			-65		65	STK-616T-65FB
			-100		100	STK-616T-100FB
			-30		30	STK-616T-30FB
Supply voltage	V _{cc}	V	4.5	5	5.5	
Current consumption	I _{cc}	mA		7	12	
Primary conductor resistance	R _{IP}	mΩ		0.4		
Quiescent voltage@0A	V _{off}	V	2.45	2.5	2.55	
Reference voltage	V _{ref}	V	2.45	2.5	2.55	
Electrical offset voltage	Offset	mV		±10		V _{off} - V _{ref}
Output Specifications	R _{out}	Ω	1		30	
	R _{ref}		1		80	
Theoretical gain	G _{th}	mV/A		50		STK-616T-40FB
				30		STK-616T-65FB
				20		STK-616T-100FB
				66.67		STK-616T-30FB
OCD function (if applicable)						
OCD range	VOC	V	0.5		3.3	
FAULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs	0	1	3	0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25℃	Non-L	%I _{pn}		±1.5		±I _{pn}
Step response time	t _{res}	μs		0.5		@90% of I _{pn}
Frequency bandwidth	BW	MHz		1		@-3dB
Output voltage noise	Vnoise	mVpp		20		
Accuracy @ 25℃	X	% I _{pn}		±1.5		@ 0.5*I _{pn}
Thermal drift of G _{th}	GAIN_T	% G _{th}	-1.5		1.5	@ -40~105℃ drift related to the value @25℃
Thermal drift of V _{off}	Voff_T	mV	-15		15	
Total Accuracy	X_TRange	% I _{pn}	-3		3	

6. Electrical data STK-616T-xxFC

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 3.3\text{ V}$


Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-66		66	STK-616T-66FC
			-30		30	STK-616T-30FC
Supply voltage	V _{cc}	V	3.15	3.3	3.6	
Current consumption	I _{cc}	mA		7	12	
Primary conductor resistance	R _{IP}	mΩ		0.4		
Quiescent voltage@0A	V _{off}	V	1.60	1.65	1.70	
Reference voltage	V _{ref}	V	1.60	1.65	1.70	
Electrical offset voltage	Offset	mV		10		
Output resistance	V _{out}	Ω	1		30	
	V _{ref}		1		80	
Theoretical gain	G _{th}	mV/A		19.8		STK-616T-66FC
				44		STK-616T-30FC
OCD function (if applicable)						
OCD range	VOC	V	0.3		1.6	
FAULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs	0	1	3	0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25℃	Non-L	%I _{pn}		±1.5		±I _{pn}
Step response time	t _{res}	μs		0.5		@90% of I _{pn}
Frequency bandwidth	BW	MHz		1		@-3dB
Output voltage noise	Vnoise	mVpp		20		
Accuracy @ 25℃	X	% I _{pn}		±1.5		@ 0.5*I _{pn}
Thermal drift of G _{th}	GAIN_T	% G _{th}	-1.5		1.5	@ -40~105℃ drift related to the value @25℃
Thermal drift of V _{off}	Voff_T	mV	-15		15	
Total Accuracy	X_TRange	% I _{pn}	-3		3	

7. Electrical data STK-616T-xxFU

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 3.3\text{ V}$


Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I_{pn}	A	-5		133	STK-616T-133FU
Supply voltage	V_{CC}	V	3.15	3.3	3.45	
Current consumption	I_{CC}	mA		7	12	
Primary conductor resistance	R_{IP}	m Ω		0.4		
Quiescent voltage@0A	V_{off}	V	0.28	0.33	0.38	
Reference voltage	V_{ref}	V	0.45	0.5	0.55	
Electrical offset voltage	Offset	mV		0.17		$V_{off} - V_{ref}$
Output resistance	V_{out}	Ω	1		30	
	V_{ref}		1		80	
Theoretical gain	G_{th}	mV/A		19.8		STK-616T-133FU
OCD function (if applicable)						
OCD range	VOC	V	0.2		0.5	
FAULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs	0	1	3	0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25 $^{\circ}\text{C}$	Non-L	% I_{pn}		± 2.5		$\pm I_{pn}$
Step response time	t_res	μs		0.5		@90% of I_{pn}
Frequency bandwidth	BW	MHz		1		@-3dB
Output voltage noise	Vnoise	mVpp		20		
Accuracy @ 25 $^{\circ}\text{C}$	X	% I_{pn}		± 2.5		@ 0.5* I_{pn}
Thermal drift of G_{th}	GAIN_T	% G_{th}	-1.5		1.5	@ -40~105 $^{\circ}\text{C}$ drift related to the value @25 $^{\circ}\text{C}$
Thermal drift of V_{off}	Voff_T	mV	-15		15	
Total Accuracy	X_TRange	% I_{pn}	-3.5		3.5	

8. Dimension & Pin definitions without OCD function

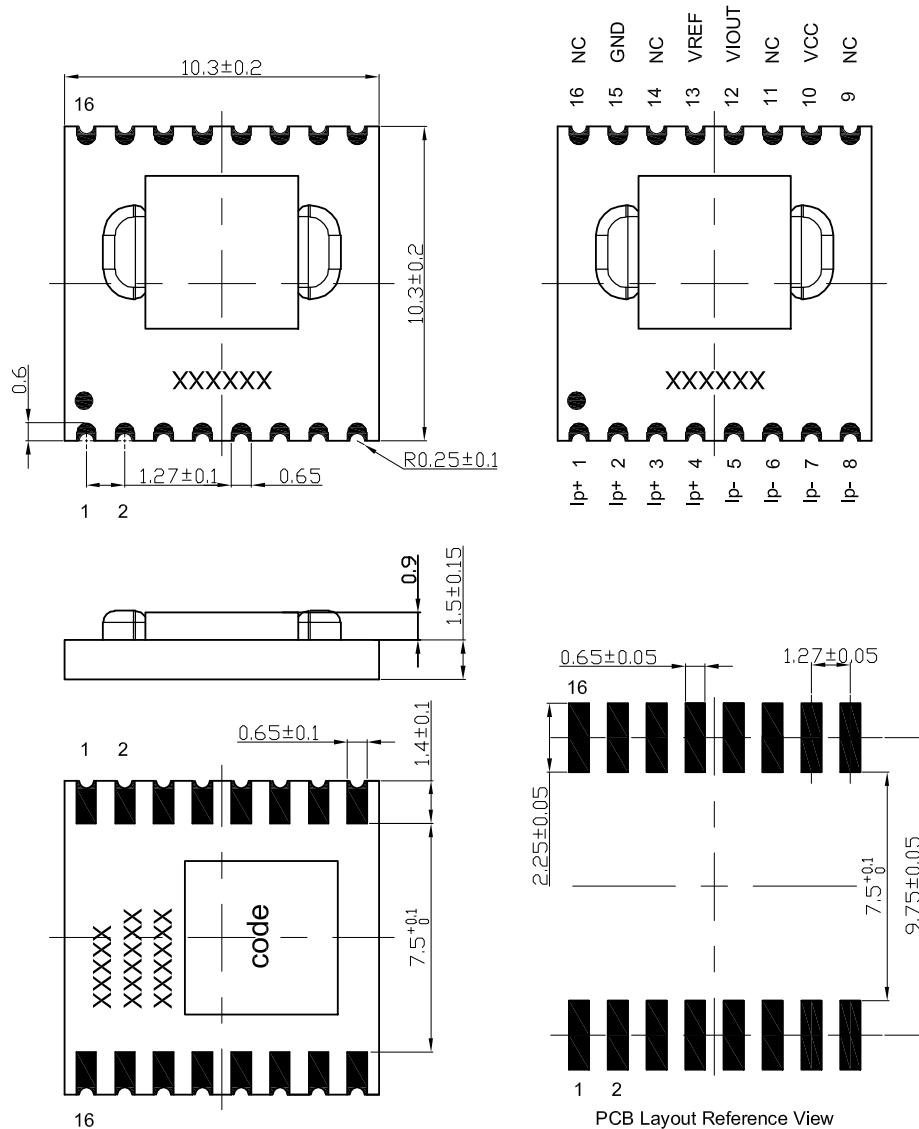

The mark of "T XXFBN" on the top surface shows the information on the "Part number": "T" = "STK-616T", "XX" = "Product sensing range", "B" = "Current direction", "F" = "Product Version Number", "N" = "Offset function".

9. Dimension & Pin definitions with OCD function

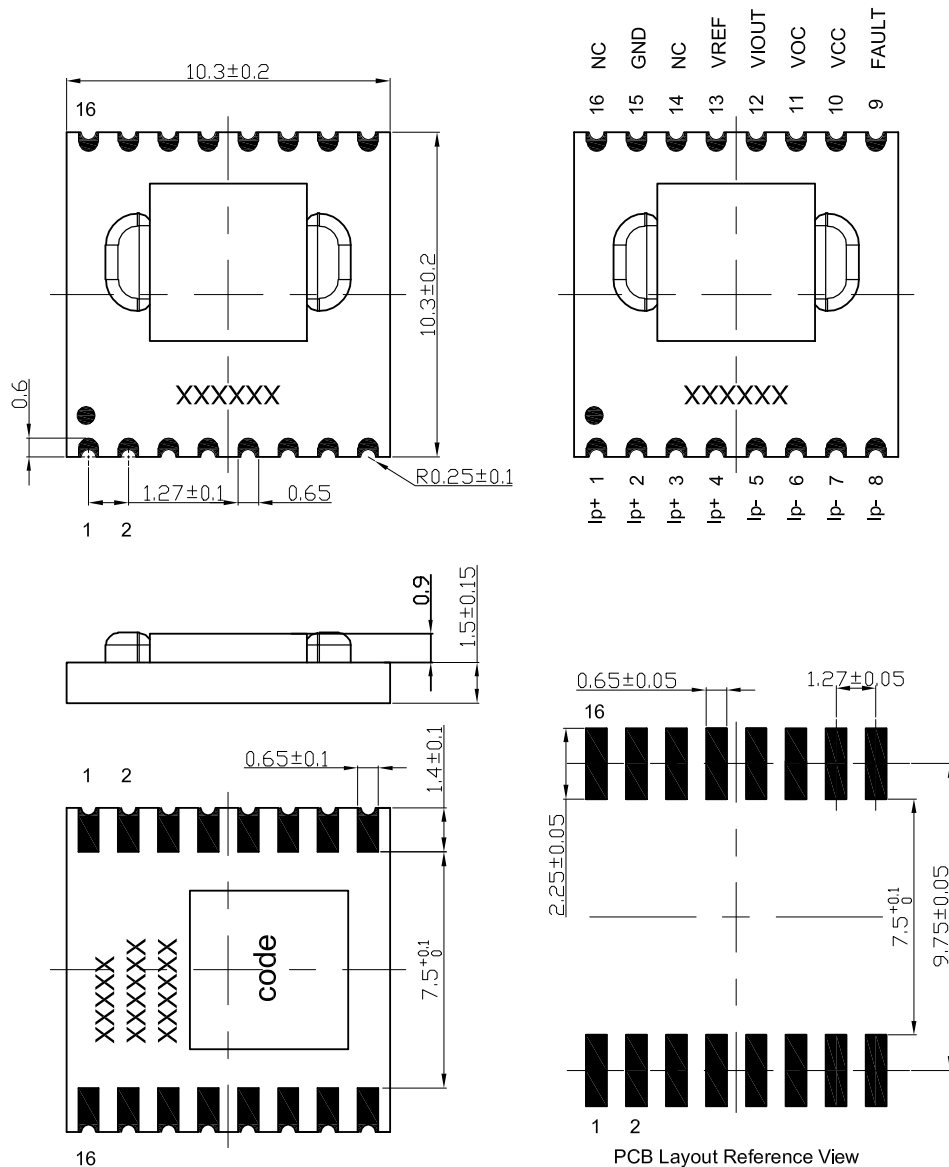

The mark of "T XXFBN" on the top surface shows the information on the "Part number": "T" = "STK-616T", "XX" = "Product sensing range", "B" = "Current direction", "F" = "Product Version Number", "N" = "Offset function".

10.Pin definitions


Pin definition for product without OCD function

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	NC	No connection, Internal use
10	VCC	Power supply pin
11	NC	No connection, Internal use
12	VIOU	Sensor output pin
13	Vref	Reference pin, output function
14	NC	No connection
15	GND	Ground pin (GND)
16	NC	No connection


Pin definition for product with OCD function

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	FAULT	Over current detection alarm output, the pin is open leakage output. Normally, the output of fault pin is high level.
10	VCC	Power supply pin
11	VOC	Over current detection threshold input pin
12	VIOU	Sensor output pin
13	Vref	Reference pin, output function
14	NC	No connection
15	GND	Ground pin (GND)
16	NC	No connection


11.PCB layout recommendation

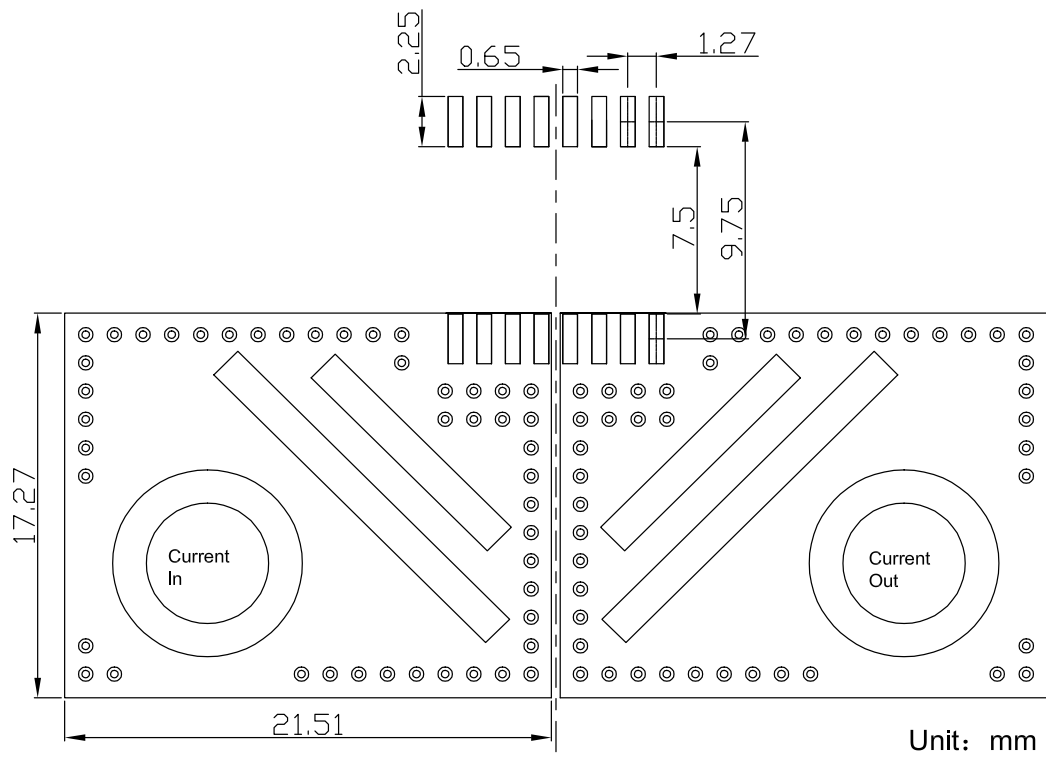

12. Frequency bandwidth

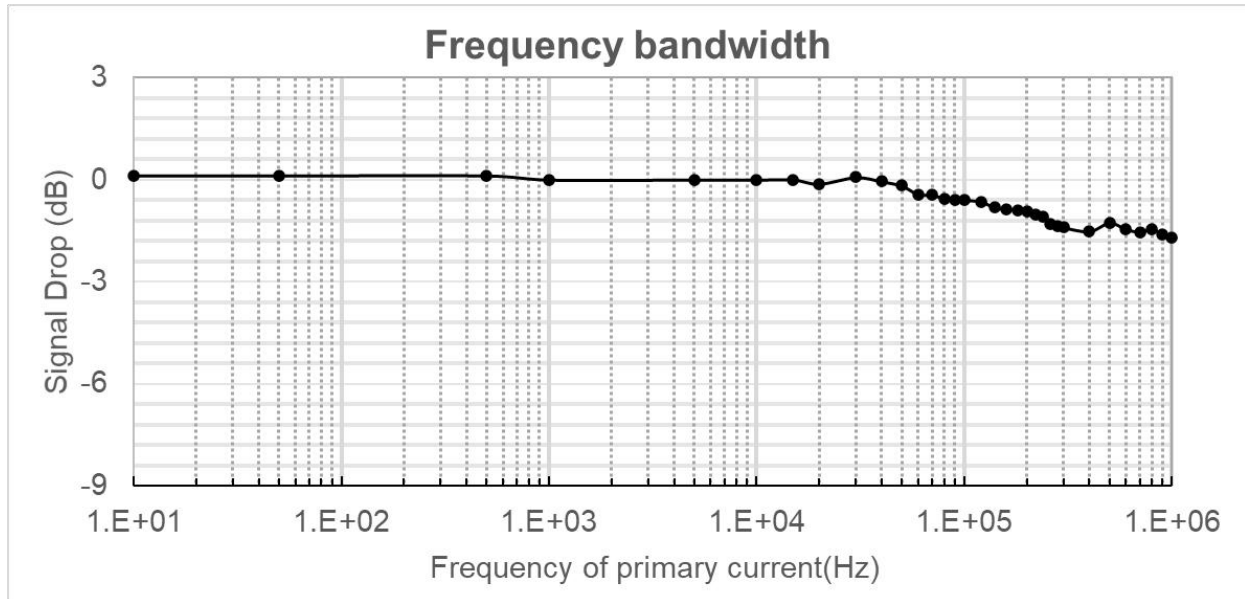


13. Step response time

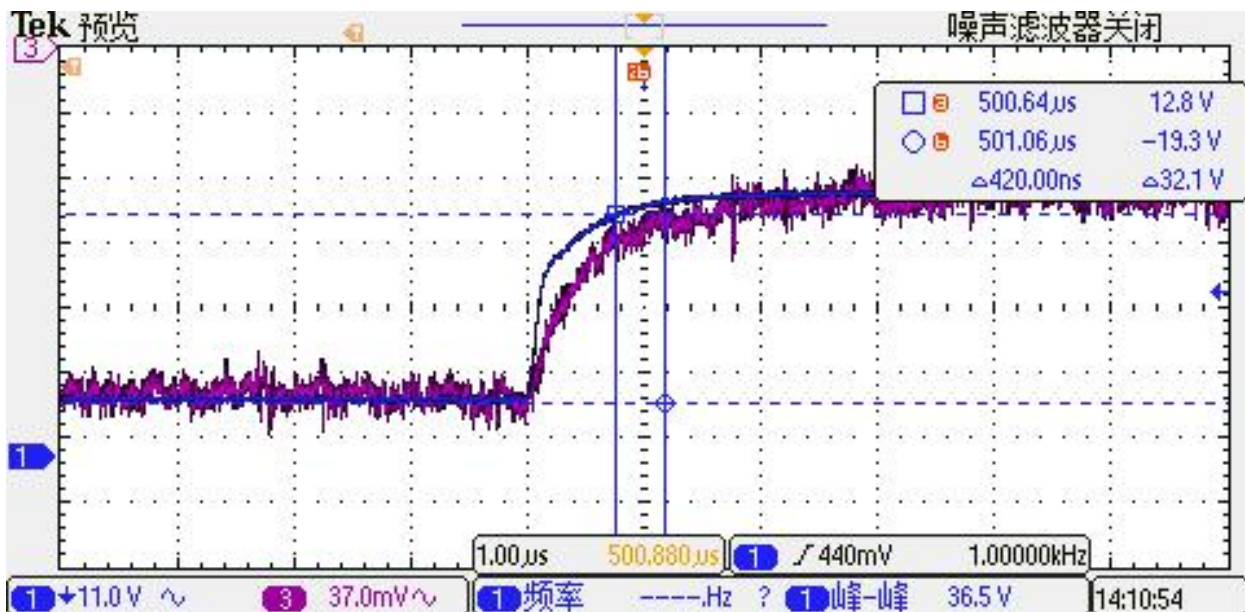



The typical frequency response of STK-616T current sensor. The response time from 90% of the primary current (blue) to 90% of the secondary output (violet) is 0.5 μ s..

14. Typical Application of STK-616T

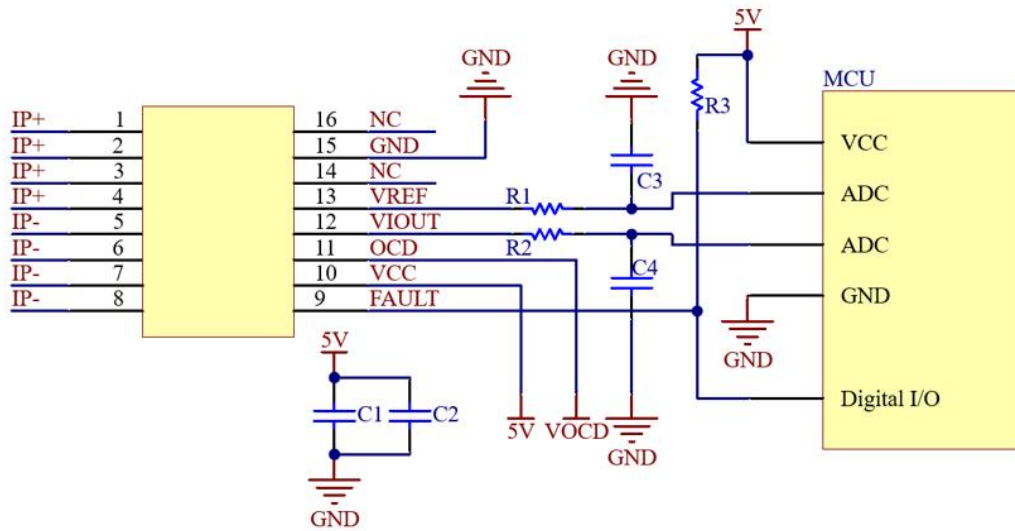


15. Power on delay

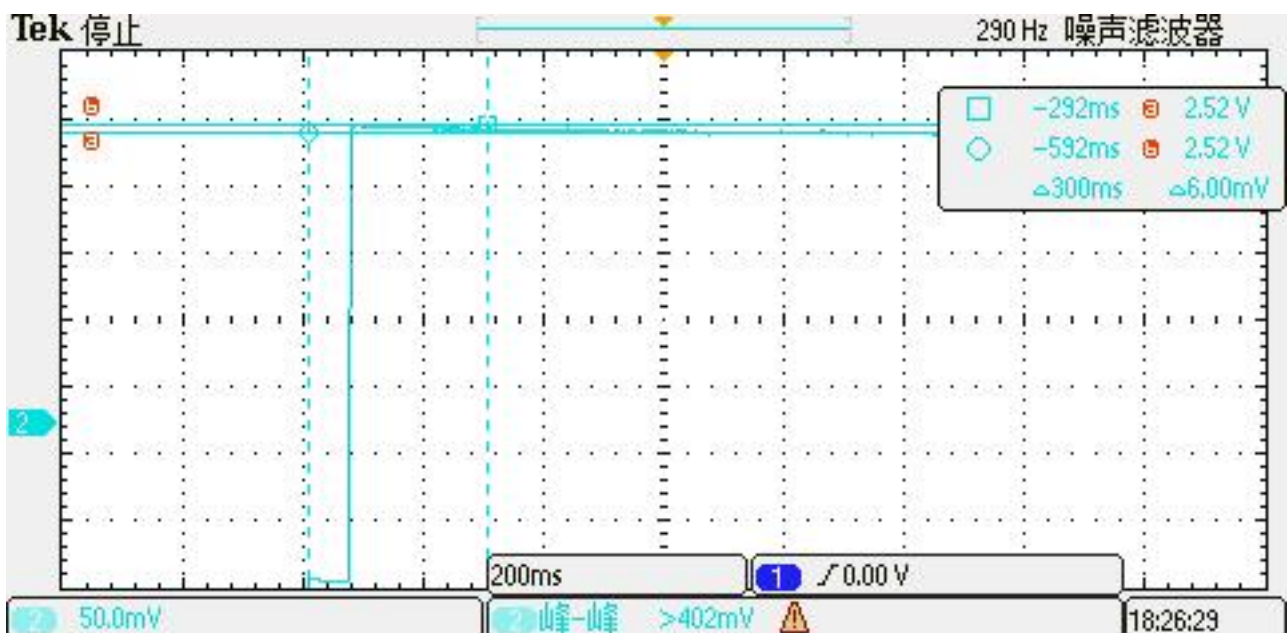

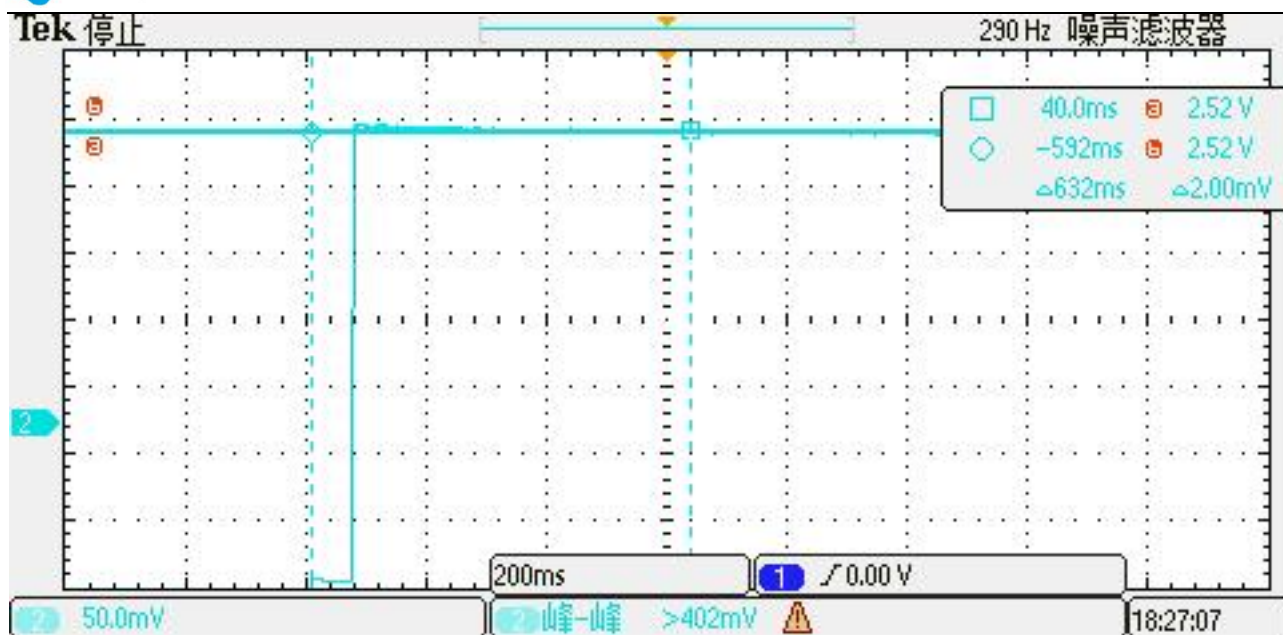


Typical power on delay of stk-616T current sensor. From 300ms to 630ms, the output difference is 4mV.

16.Examples of OCD function

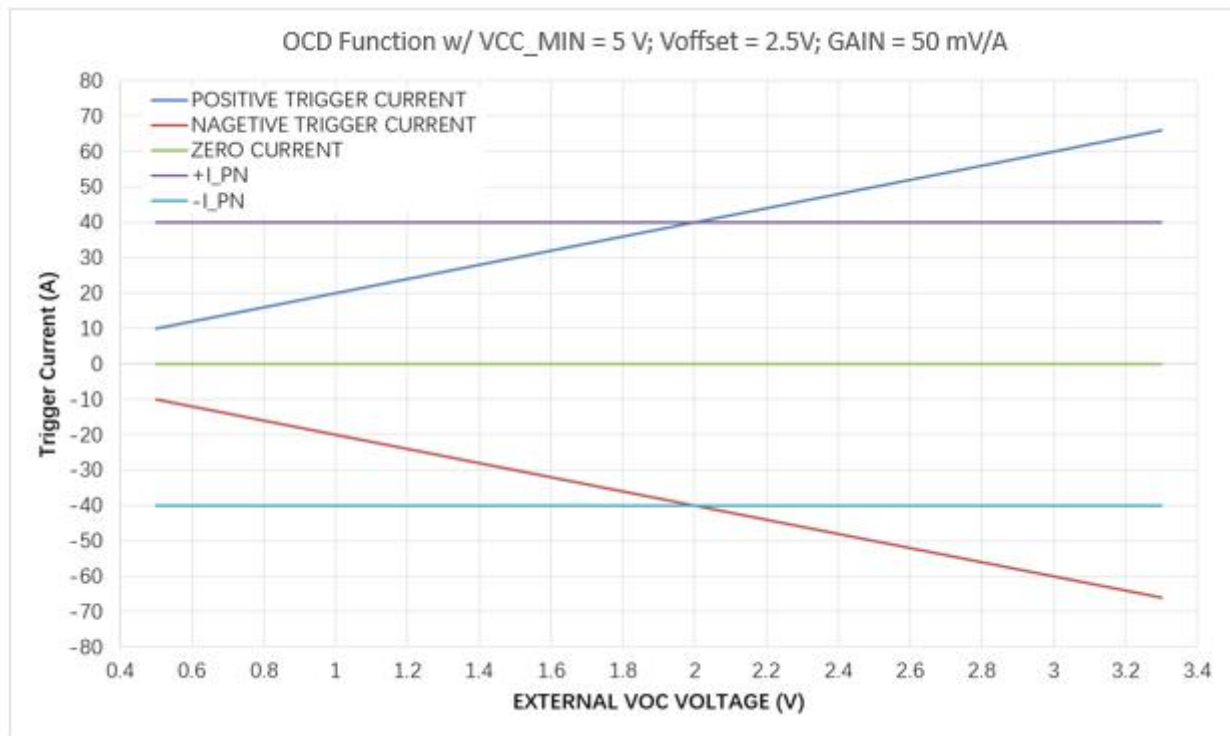

OCD function for STK-616T-40FB

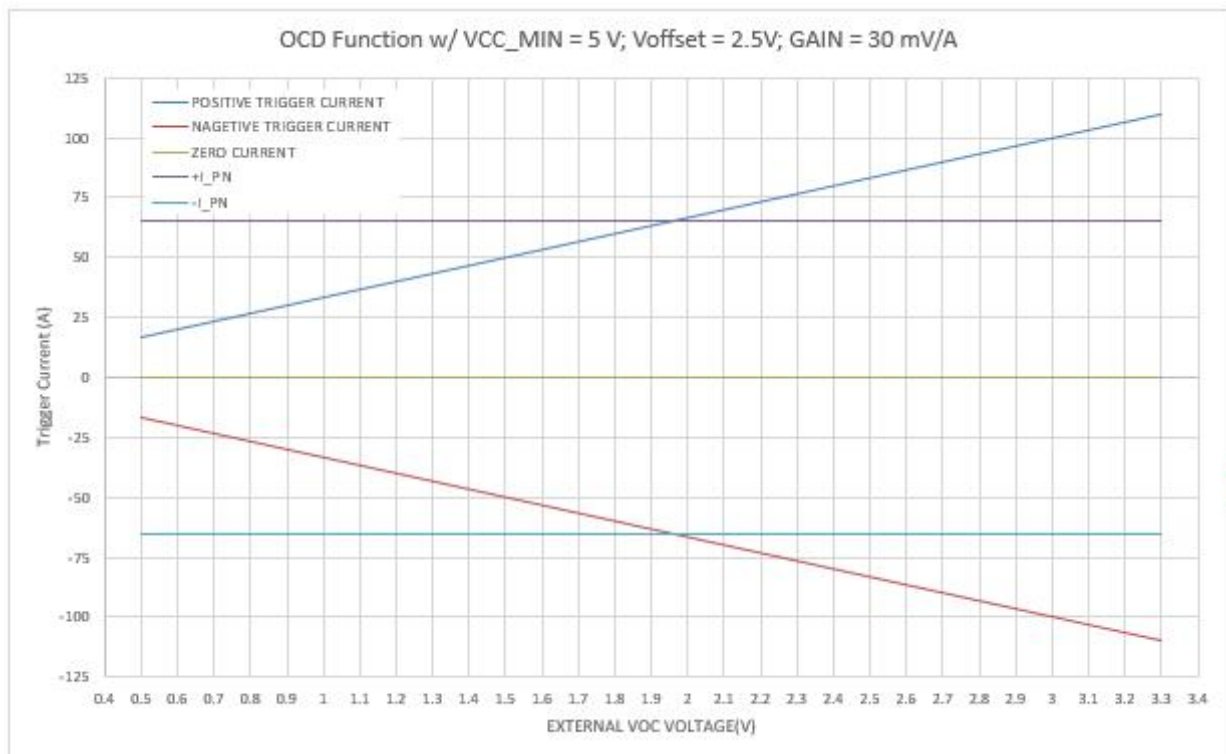


OCD function for STK-616T-65FB

17. General information on OCD


This section describes the general information on OCD function, the specific functions, which are not listed in the section of “electrical data”, can be defined per request.

Since the trigger voltage is set after the second amplifier, the OCD function supports that the trigger current can be higher than I_{pn} . The trigger voltage can be defined:

- a) $V_{ref} = 2.5\text{ V}$
 - ①. $0.5\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm V_{OC}$;
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$;
- b) $V_{ref} = 1.65\text{ V}$
 - ①. $0.3\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm V_{OC}$;
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$
- c) $V_{ref} = 0.5\text{ V}$
 - ①. $0.2\text{ V} \leq V_{OC} \leq 0.5\text{ V}$;
 - ②. Trigger voltage = $V_{ref} + 8 \cdot V_{OC}$;
 - ③. Trigger current = $(V_{ref} + V_{OC} - V_{off}) / G_{th}$

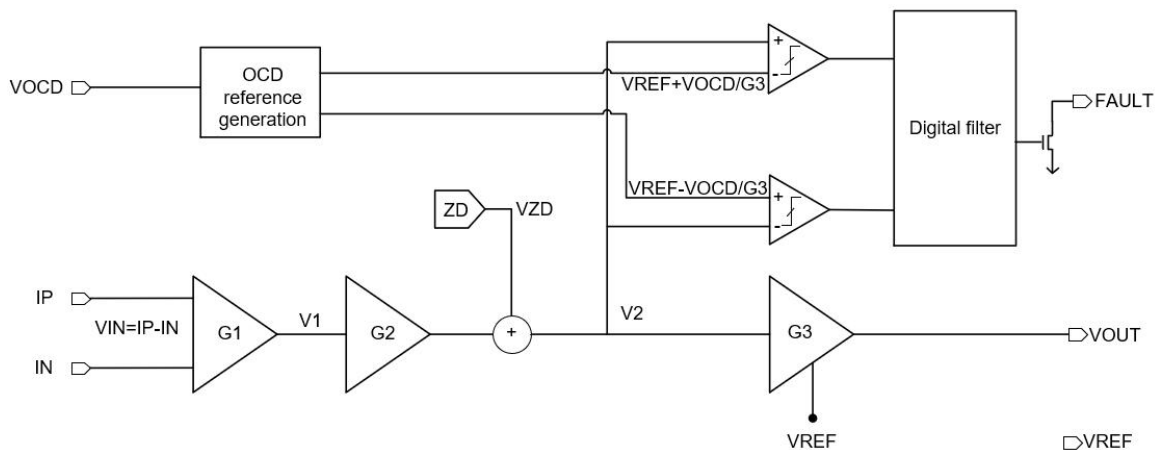


Functional Block Diagram on OCD function when $V_{ref} = 2.5\text{ V}$

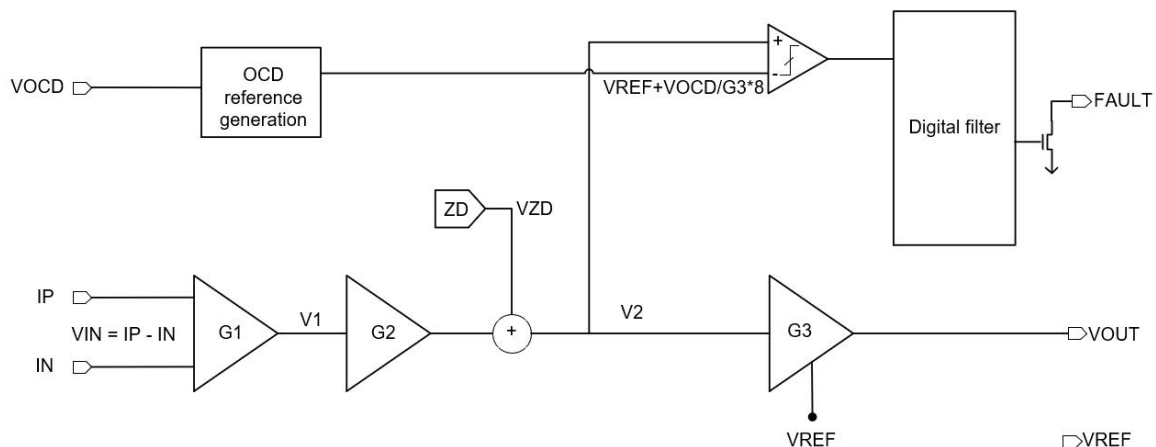


Functional Block Diagram on OCD function when $V_{ref} = 0.5\text{ V}$

With the above definition, below shows the relationship between trigger voltage and the setting of Vcc, VOC.

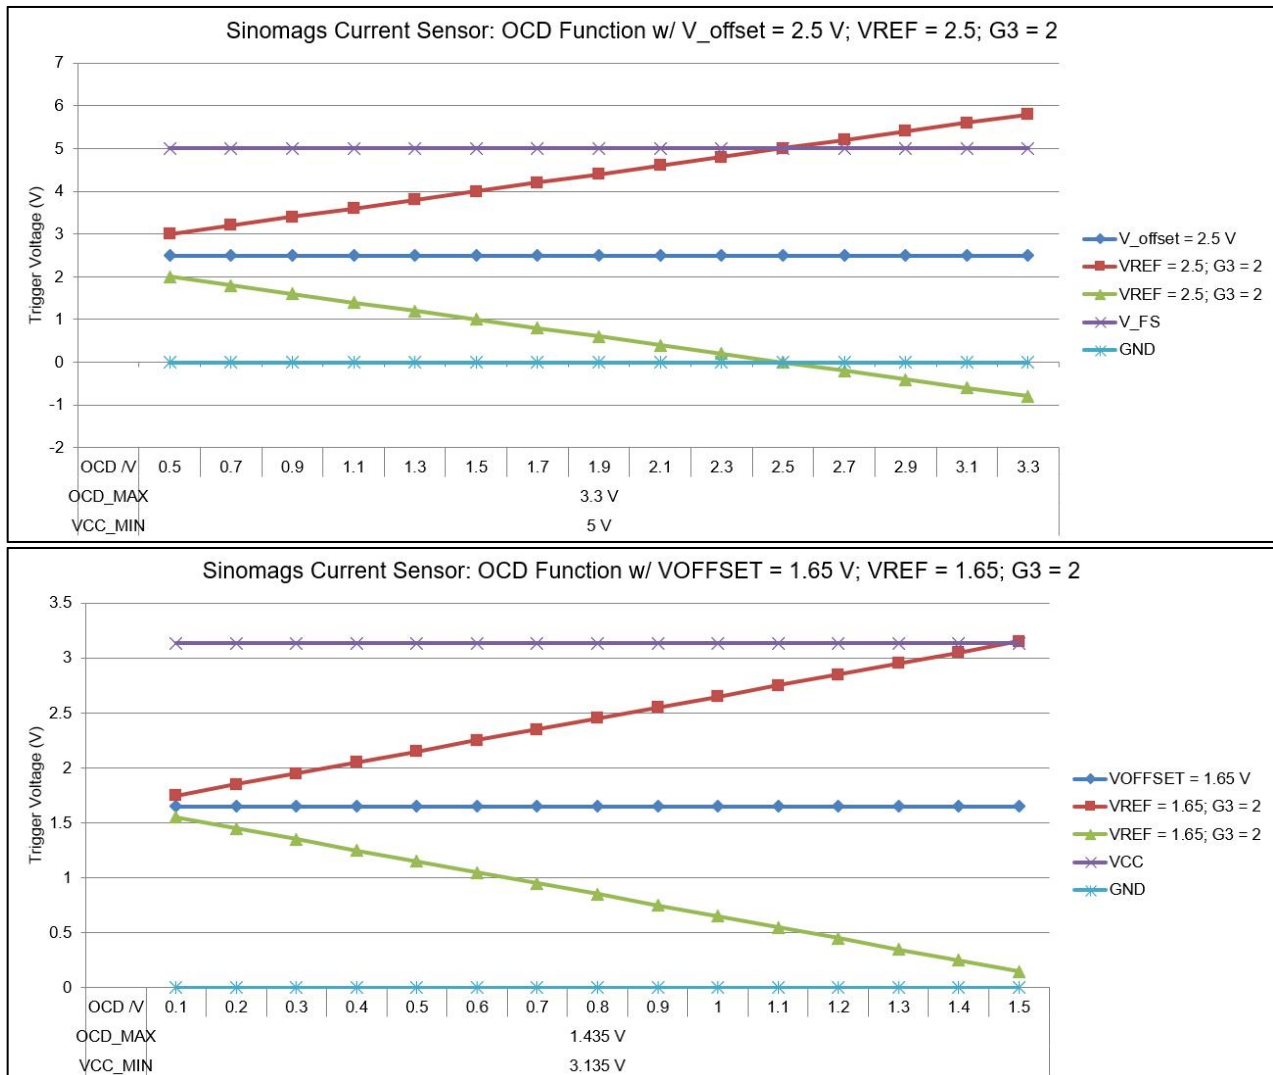

18. PACKAGE MATERIALS INFORMATION

TAPE AND REEL INFORMATION

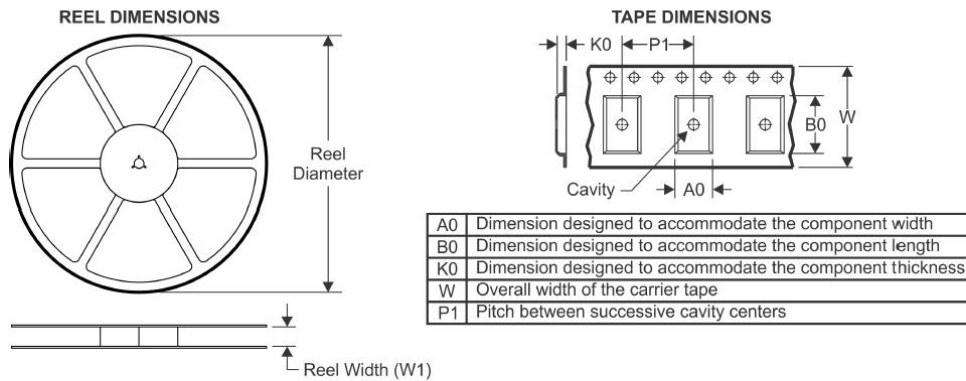

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

