

Current Sensor

Product Series: STK-616TML

STK-616T-10MLB3

STK-616T-20MLB5

STK-616T-30MLB5

STK-616T-40MLB5

STK-616T-50MLB5

STK-616T-65MLB5

Part number: STK-616T-75MLB5

STK-616T-100MLB5

STK-616T-20MLB3


STK-616T-30MLB3

STK-616T-33MLB3

STK-616T-40MLB3

STK-616T-65MLB3

Version: Ver 3.3

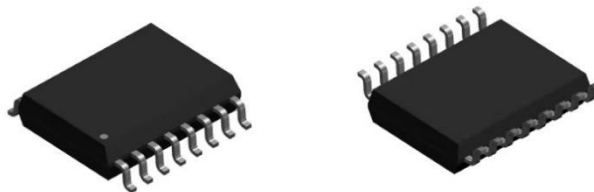

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Part number definition	3
3.	Temperature vs Current	4
4.	Functional Block Diagram	4
5.	Electrical data STK-616T-XXMLB5	5
6.	Electrical data STK-616T-XXMLB3	6
7.	Dimension & Pin definitions with OCD function	7
8.	Pin definitions	8
9.	PCB layout recommendation	8
10.	Frequency bandwidth of STK-616T-XXMLBX	9
11.	Step response time of STK-616T-XXMLBX	9
12.	Examples of OCD function	10
13.	General information on OCD	11
14.	Typical Application of STK-616TML	13
15.	PACKAGE MATERIALS INFORMATION	13

1. Description

The STK-616TM series current sensor is based on TMR (magneto resistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

- The product is packaged in standard SOIC16 form.
- AEC-Q100, automotive qualified.

Typical applications

- AC Variable speed drives
- AC/DC, DC/DC power supplies
- Inverter
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 125
Storage temperature	T_stg	°C	-40 ~ 125
Mass	m	g	0.5

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _{cc}	V	6
ESD rating (HBM)	U_ESD	kV	4
Junction temperature	T_J	°C	150

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter


Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	3.6	
Impulse withstand voltage 1.2/50μs	Ū _w	kV	6	
Clearance distance (pri. -sec)	D _{ci}	mm	8	Determined by customer's layout
Creepage distance (pri. -sec)	D _{cp}	mm	8	

Measuring current table


Product	Meas. Range I _{pn} (A)	Sensitivity (mV/A)	V _{cc} (V)	T (°C)
STK-616T-10MLB3-1-1.65-E-2-C-N-2	±10A	132	3.3	-40 ~ 125
STK-616T-20MLB3-1-1.65-E-0-C-N	±20A	66	3.3	-40 ~ 125
STK-616T-30MLB3-0-1.65-X-X-X-N	±30A	44	3.3	-40 ~ 125
STK-616T-33MLB3-1-1.65-E-0-C-N	±33.3A	39.6	3.3	-40 ~ 125
STK-616T-40MLB3-1-1.65-E-2-C-N	±40A	33	3.3	-40 ~ 125
STK-616T-50MLB3-1-1.65-E-1-Z-R	±50A	26.4	3.3	-40 ~ 125
STK-616T-65MLB3-1-1.65-E-2-C-N	±65A	20.3	3.3	-40 ~ 125

STK-616T-20MLB5-1-2.5-E-2-C-R	±20A	100	5	-40 ~ 125
STK-616T-30MLB5-0-2.5-X-X-X-N	±30A	66.6	5	-40 ~ 125
STK-616T-40MLB5-1-2.5-E-2-C-N	±40A	50	5	-40 ~ 125
STK-616T-65MLB5-1-2.5-E-2-C-N	±65A	30.8	5	-40 ~ 125
STK-616T-50MLB5-0-2.5-X-X-X-R	±50A	40	5	-40 ~ 125
STK-616T-50MLB5-1-2.5-E-2-C-R	±50A	40	5	-40 ~ 125
STK-616T-75MLB5-1-2.5-E-2-C-N	±75A	26.7	5	-40 ~ 125
STK-616T-100MLB5-0-2.5-X-X-X-N	±100A	20	5	-40 ~ 125


2. Part number definition

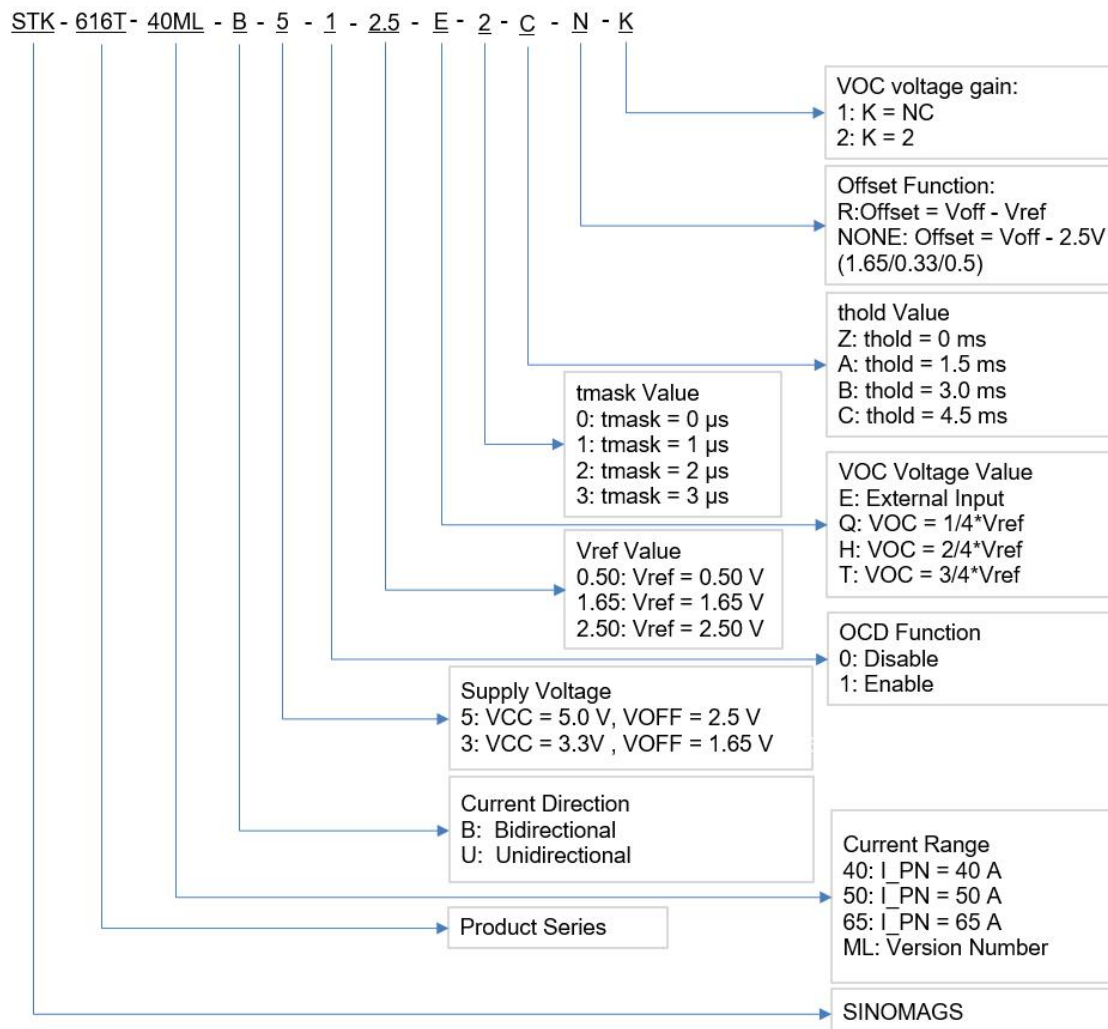

3. Temperature vs Current

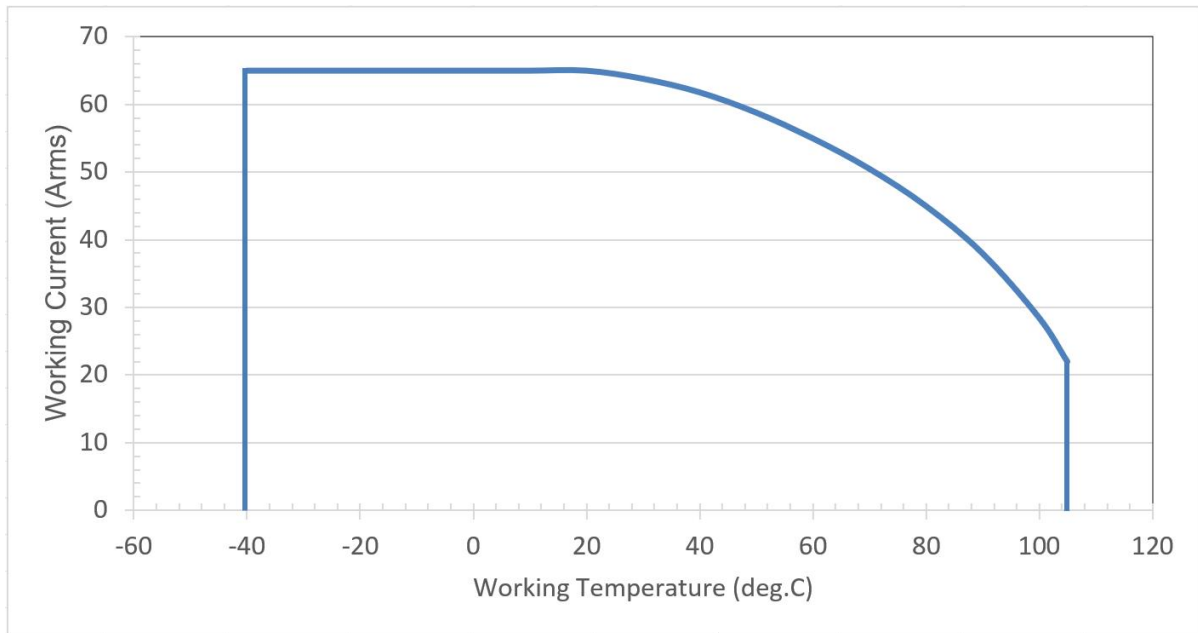

4. Functional Block Diagram

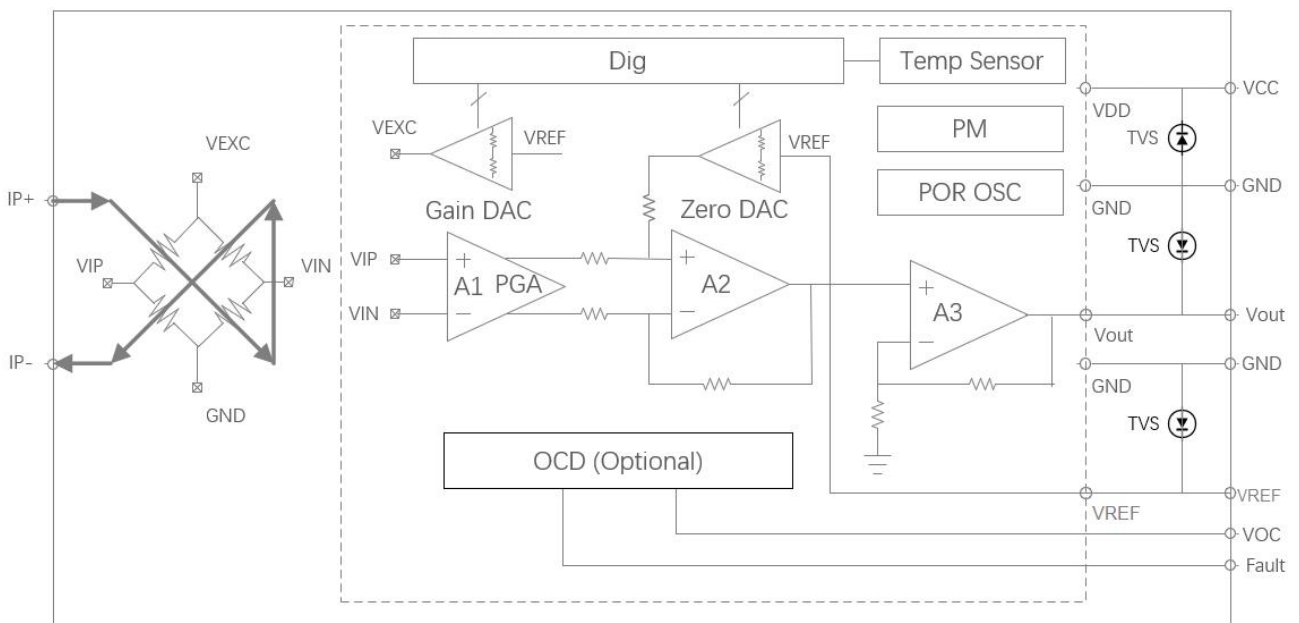

5. Electrical data STK-616T-XXMLB5

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-20		20	STK-616T-20MLB5
			-30		30	STK-616T-30MLB5
			-40		40	STK-616T-40MLB5
			-50		50	STK-616T-50MLB5
			-65		65	STK-616T-65MLB5
			-75		75	STK-616T-75MLB5
			-100		100	STK-616T-100MLB5
Supply voltage	Vcc	V	4.5	5	5.5	
Current consumption	Icc	mA		7	12	
Primary conductor resistance	R_IP	mΩ		0.85		
Quiescent voltage@0A	Voff	V	2.45	2.5	2.55	
Reference voltage	Vref	V	2.45	2.5	2.55	
Electrical offset voltage	Offset	mV		±10		Voff - Vref
Output Specifications	R _{out}	Ω	1		30	
	R _{ref}		1		80	
Theoretical gain	G _{th}	mV/A		100		STK-616T-20MLB5
				66		STK-616T-30MLB5
				50		STK-616T-40MLB5
				40		STK-616T-50MLB5
				30.8		STK-616T-65MLB5
				26.7		STK-616T-75MLB5
				20		STK-616T-100MLB5
OCD function (if applicable)						
OCD range	VOC	V	0.5		3.3	
FAULT error		%		5%		% of OCD
OCD	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs		2		0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25°C	Non-L	%I _{pn}		±1.5		±I _{pn}
Step response time	t _{res}	μs		0.9		@90% of I _{pn} STK-616T-XXMLBX
Frequency bandwidth	BW	MHz		0.6		@-3dB STK-616T-XXMLBX

Output voltage noise	Vnoise	mVpp		10		@1.4 MHz
Thermal drift of G_th	GAIN_T	% G_th		±1.5		@ -40~105℃ drift related to the value @25℃
Thermal drift of Voff	Voff_T	mV		±15		
Total Accuracy	X_TRange	% I_pn		±3.5		


6. Electrical data STK-616T-XXMLB3

Condition: T_A = 25℃, Vcc = 3.3 V

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-10		10	STK-616T-10MLB3
			-20		20	STK-616T-20MLB3
			-30		30	STK-616T-30MLB3
			-40		40	STK-616T-40MLB3
			-50		50	STK-616T-50MLB3
			-65		65	STK-616T-65MLB3
Supply voltage	V _{cc}	V	3.15	3.3	3.45	
Current consumption	I _{cc}	mA		7	12	
Primary conductor resistance	R _{IP}	mΩ		0.85		
Quiescent voltage@0A	V _{off}	V	1.6	1.65	1.7	
Reference voltage	V _{ref}	V	1.6	1.65	1.7	
Electrical offset voltage	Offset	mV		±10		V _{off} - V _{ref}
Output Specifications	R _{out}	Ω	1		30	
	R _{ref}		1		80	
Theoretical gain	G _{th}	mV/A		132		STK-616T-10MLB3
				66		STK-616T-20MLB3
				44		STK-616T-30MLB3
				33		STK-616T-40MLB3
				26.4		STK-616T-50MLB3
				20.3		STK-616T-65MLB3
OCD function (if applicable)						
OCD range	V _{OC}	V	0.3		1.6	
FOULT error		%		5%		% of OCD
OCD Hysteresis	I _{HYS}	%		10%		% of OCD
OCD Fault Mask	t _{mask}	μs		2		0, 1, 2, 3 μs
OCD Fault Mask error	T _{mask_error}	ns		125		
OCD Fault Hold Time	t _{hold}	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25°C	Non-L	%I _{pn}		±1.5		±I _{pn}
Step response time	t _{res}	μs		0.9		@90% of I _{pn}

						STK-616T-XXMLBX
Frequency bandwidth	BW	MHz		0.6		@-3dB STK-616T-XXMLBX
Output voltage noise	Vnoise	mVpp		10		STK-616T-XXMLB3 @1.4 MHz
				20		STK-616T-10MLB3 @1.4MHz
Thermal drift of G_th	GAIN_T	% G_th		±1.5		@ -40~105℃ drift related to the value @25℃
Thermal drift of Voff	Voff_T	mV		±15		
Total Accuracy	X_TRange	% I_pn		±3.5		

7. Dimension & Pin definitions with OCD function

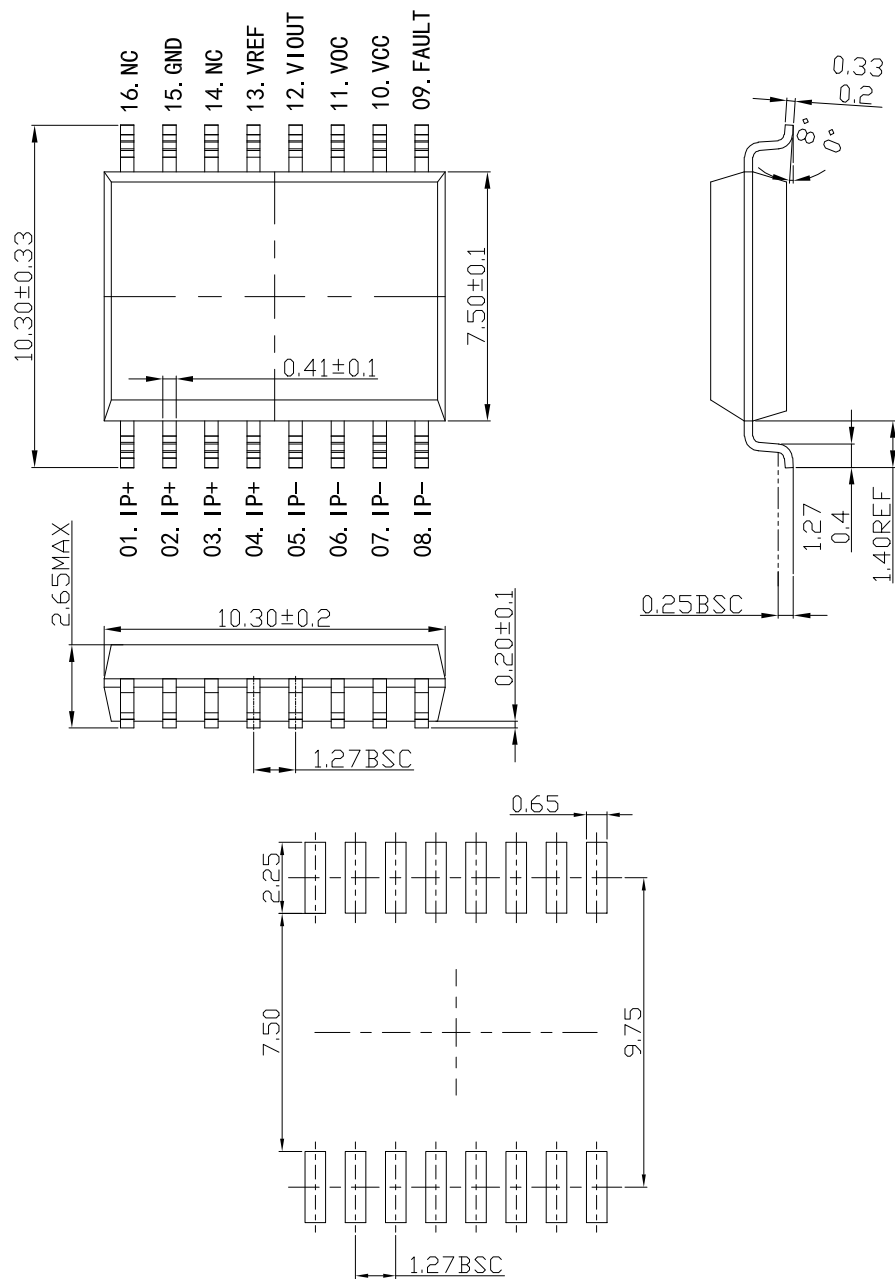


PCB Layout Reference View

8. Pin definitions


Pin definition for product with OCD function

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	FAULT	Over current detection alarm output, the pin is open leakage output. Normally, the output of fault pin is high level.
10	VCC	Power supply pin
11	VOC	Over current detection threshold input pin
12	VIOUT	Sensor output pin
13	VREF	Reference pin, output function
14	NC	No connection
15	GND	Ground pin (GND)
16	NC	No connection


9. PCB layout recommendation

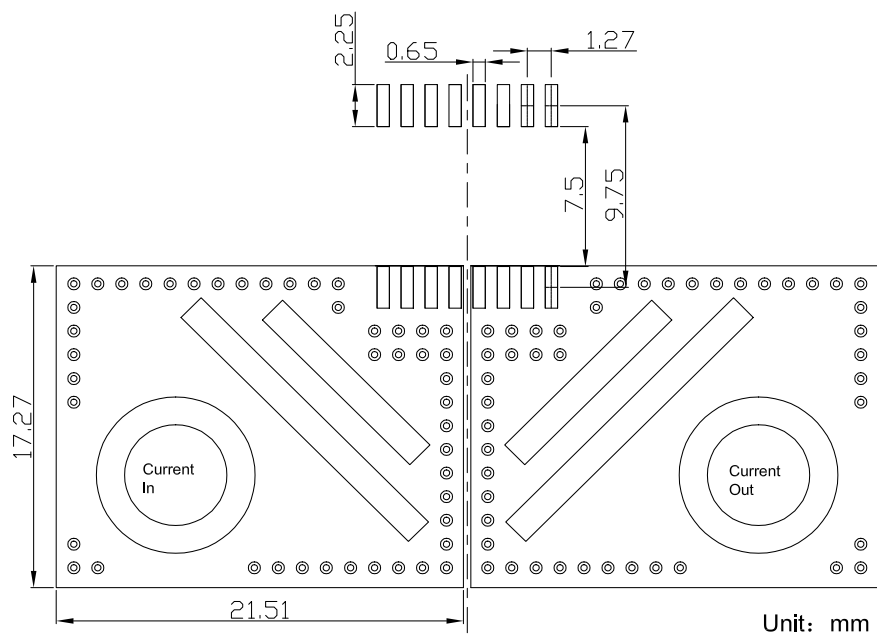

10. Frequency bandwidth of STK-616T-XXMLBX

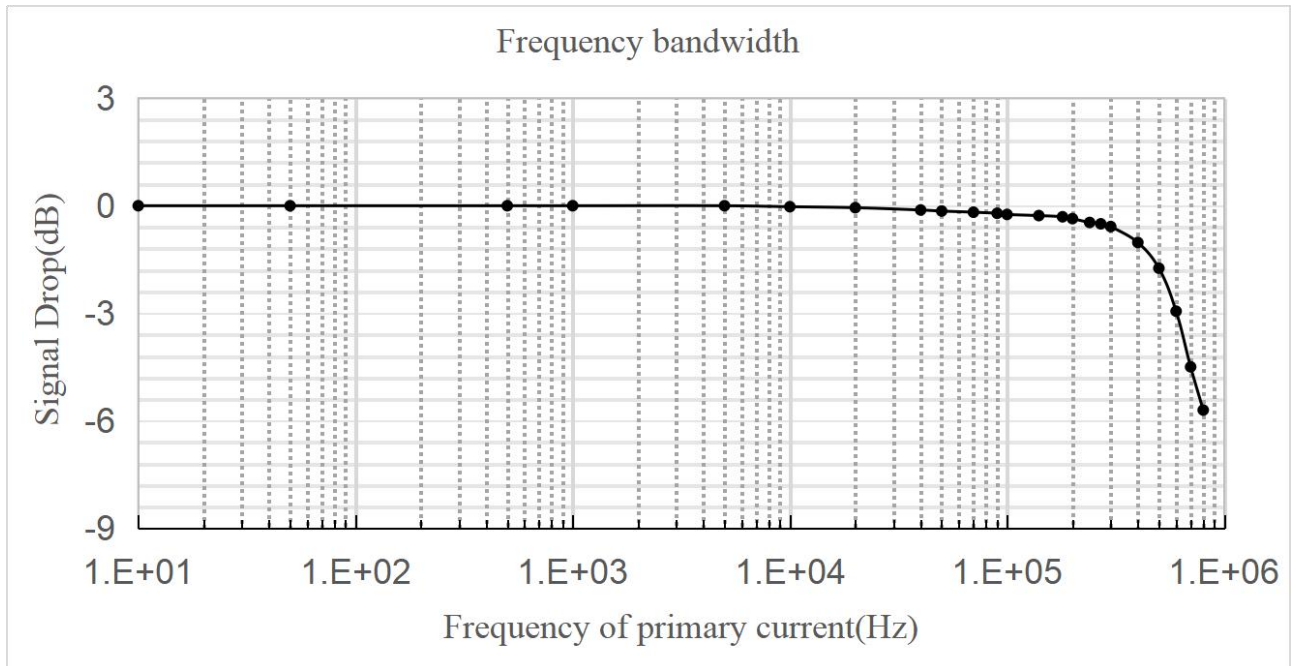


11. Step response time of STK-616T-XXMLBX

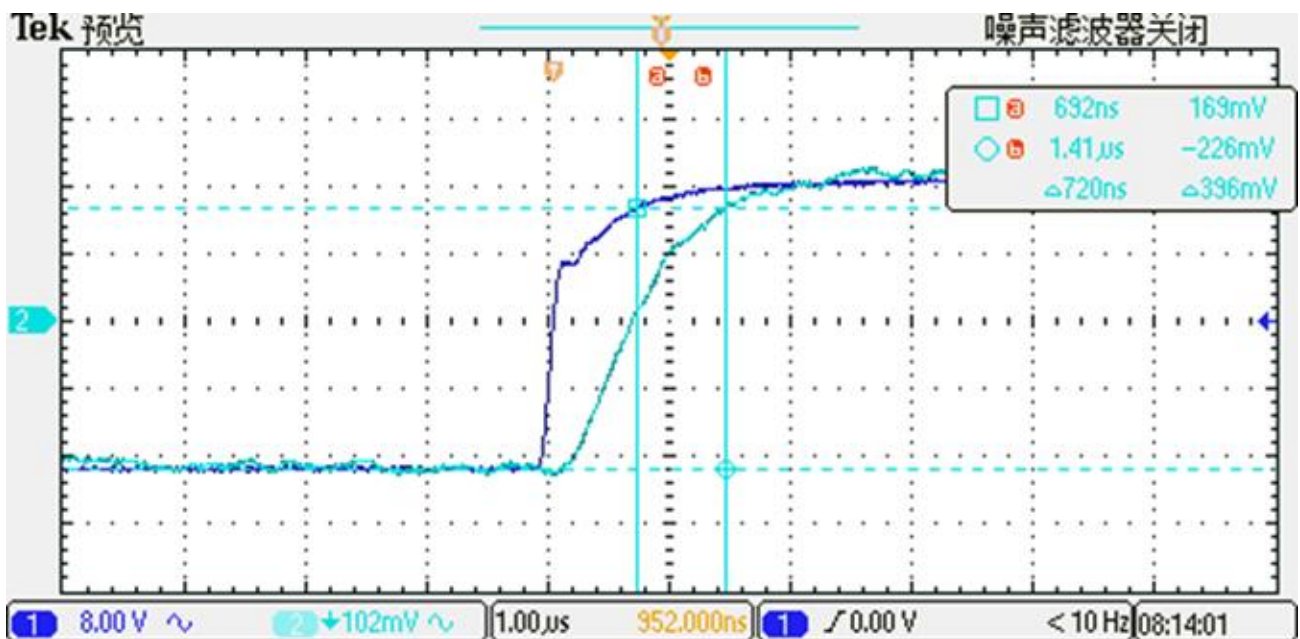


The typical low frequency response of STK-616TM current sensor. The response time from 90% of the primary current to 90% of the secondary output is 0.9 μs..

12.Examples of OCD function

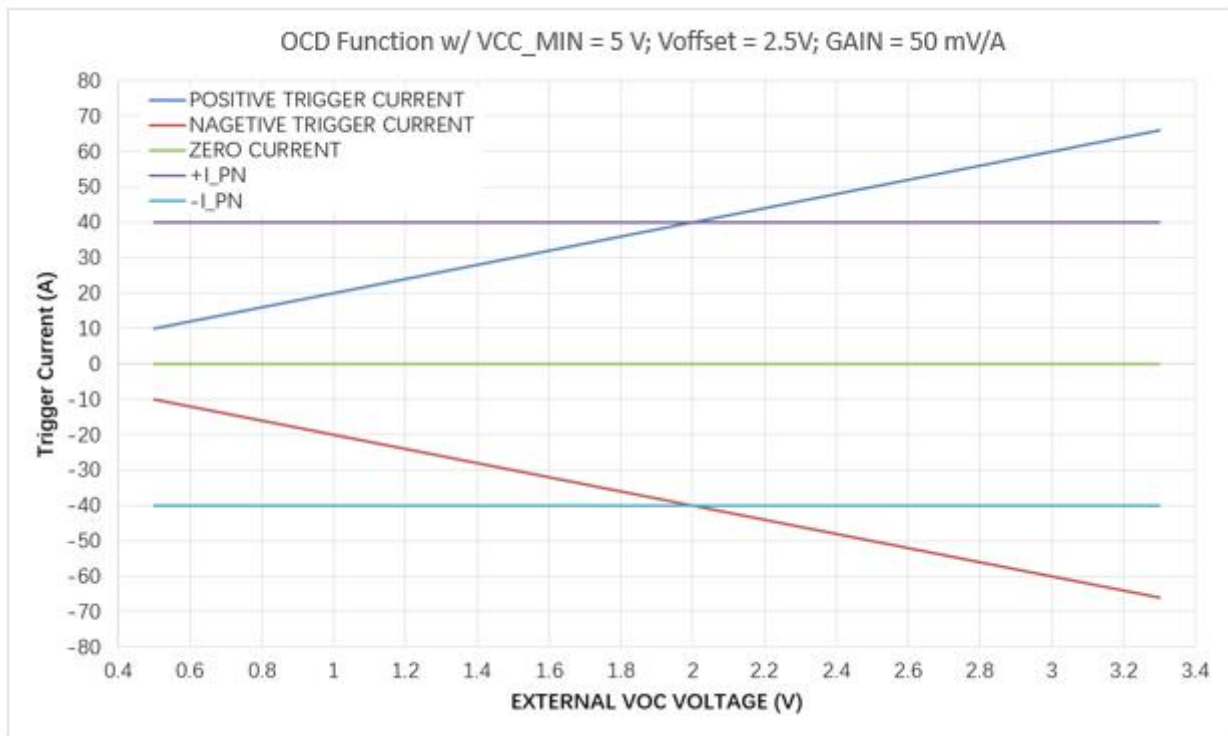

OCD function for STK-616T-40MB5

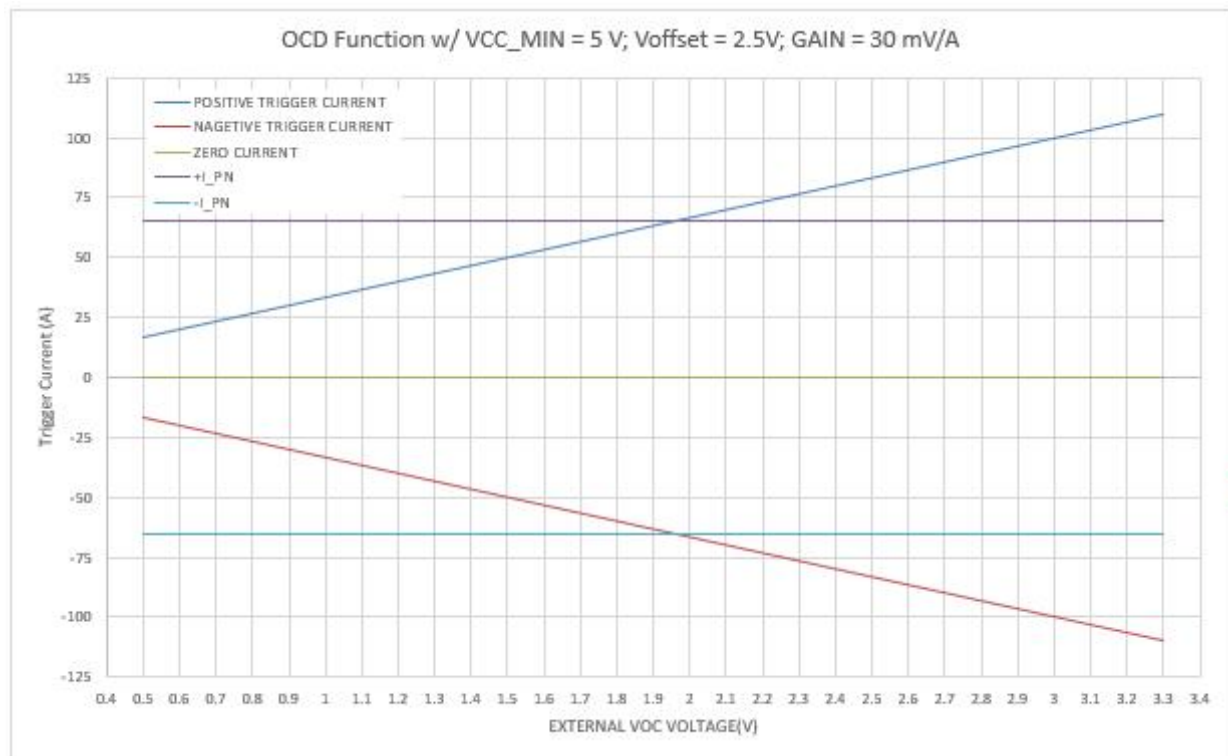


OCD function for STK-616T-65MB5

13. General information on OCD


This section describes the general information on OCD function, the specific functions, which are not listed in the section of “electrical data”, can be defined per request.

Since the trigger voltage is set after the second amplifier, the OCD function supports that the trigger current can be higher than I_{pn} . The trigger voltage can be defined:

- a) $V_{ref} = 2.5\text{ V}, K=1$
 - ①. $0.5\text{ V} \leq V_{OC} \leq V_{CC} - 1.7\text{ V};$
 - ②. Trigger voltage = $V_{ref} \pm V_{OC};$
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th};$
- b) $V_{ref} = 1.65\text{ V}, K=1$
 - ①. $0.3\text{ V} \leq V_{OC} \leq V_{CC} - 1.7\text{ V};$
 - ②. Trigger voltage = $V_{ref} \pm V_{OC};$
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th};$
- c) $V_{ref} = 0.5\text{ V}, K=1$
 - ①. $0.2\text{ V} \leq V_{OC} \leq 0.5\text{ V};$
 - ②. Trigger voltage = $V_{ref} + 8 \cdot V_{OC};$
 - ③. Trigger current = $(V_{ref} + V_{OC} - V_{off}) / G_{th};$
- d) $V_{ref} = 2.5\text{ V}, K=2$
 - ①. $0.5\text{ V} \leq V_{OC} \leq 2\text{ V};$
 - ②. Trigger voltage = $V_{ref} \pm K \cdot V_{OC};$
 - ③. Trigger current = $(V_{ref} \pm K \cdot V_{OC} - V_{off}) / G_{th};$
- e) $V_{ref} = 1.65\text{ V}, K=2$
 - ①. $0.3\text{ V} \leq V_{OC} \leq 1.15\text{ V};$
 - ②. Trigger voltage = $V_{ref} \pm K \cdot V_{OC};$
 - ③. Trigger current = $(V_{ref} \pm K \cdot V_{OC} - V_{off}) / G_{th};$
- f) $V_{ref} = 0.5\text{ V}, K=2$
 - ①. $0.2\text{ V} \leq V_{OC} \leq 0.5\text{ V};$
 - ②. Trigger voltage = $V_{ref} + 8 \cdot V_{OC};$
 - ③. Trigger current = $(V_{ref} + 8 \cdot V_{OC} - V_{off}) / G_{th};$


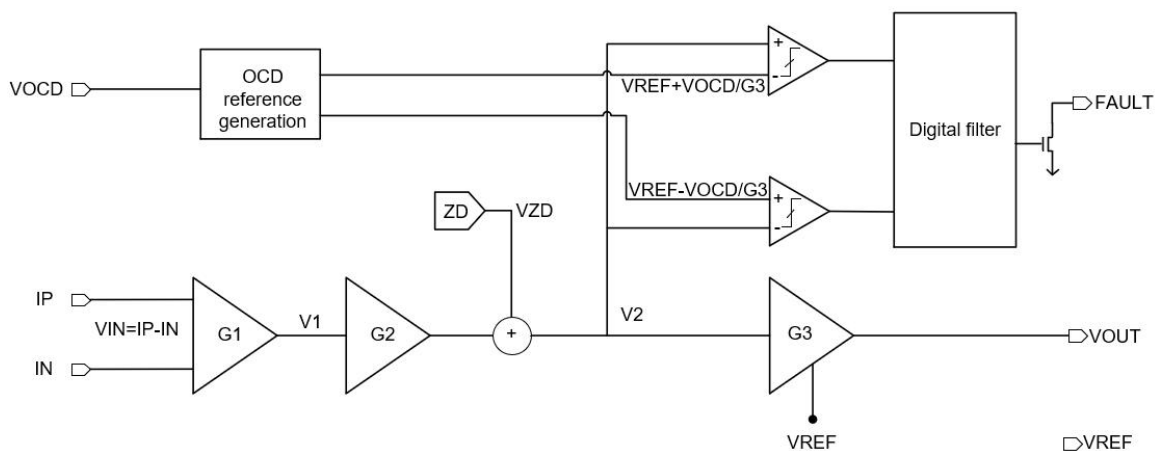


Functional Block Diagram on OCD function when $V_{ref} = 2.5\text{ V}$

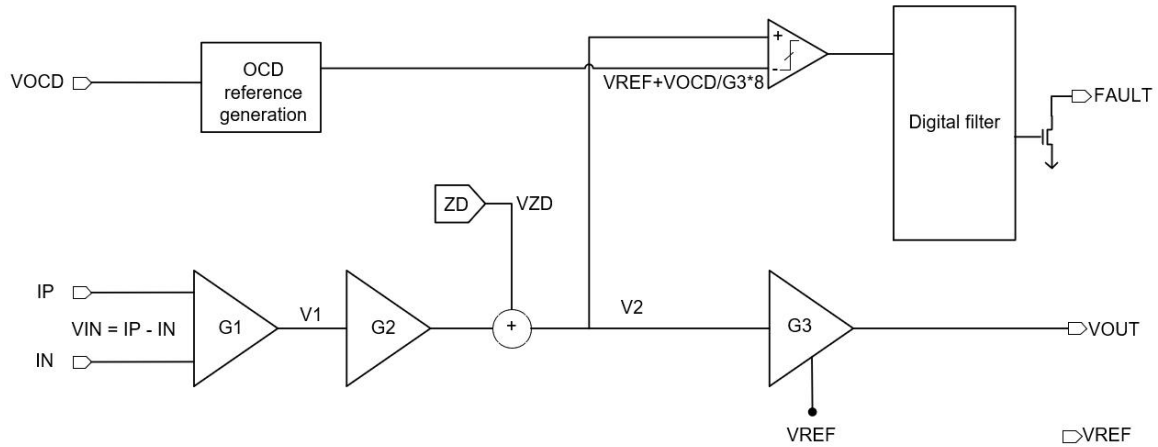


Functional Block Diagram on OCD function when $V_{ref} = 0.5\text{ V}$

With the above definition, below shows the relationship between trigger voltage and the setting of V_{cc} , V_{OC} .

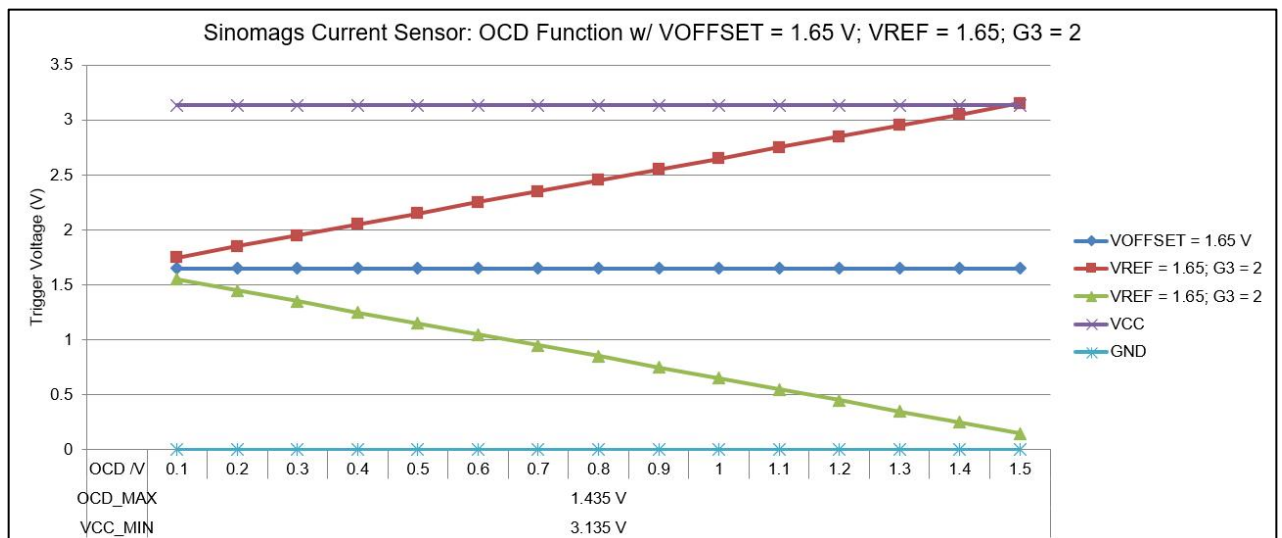
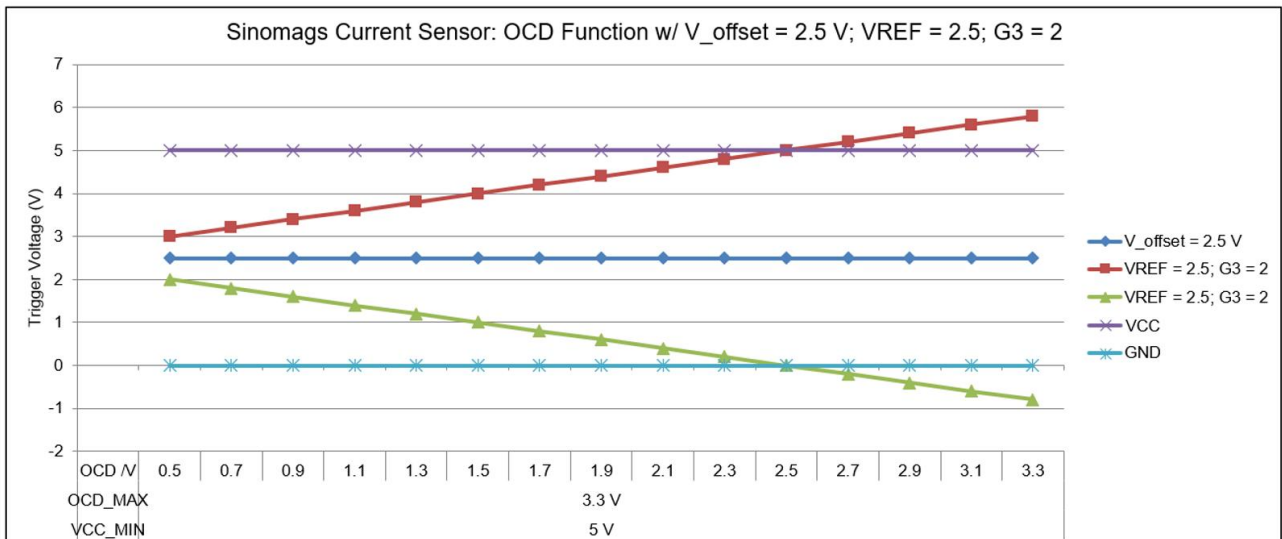


14. Typical Application of STK-616TML

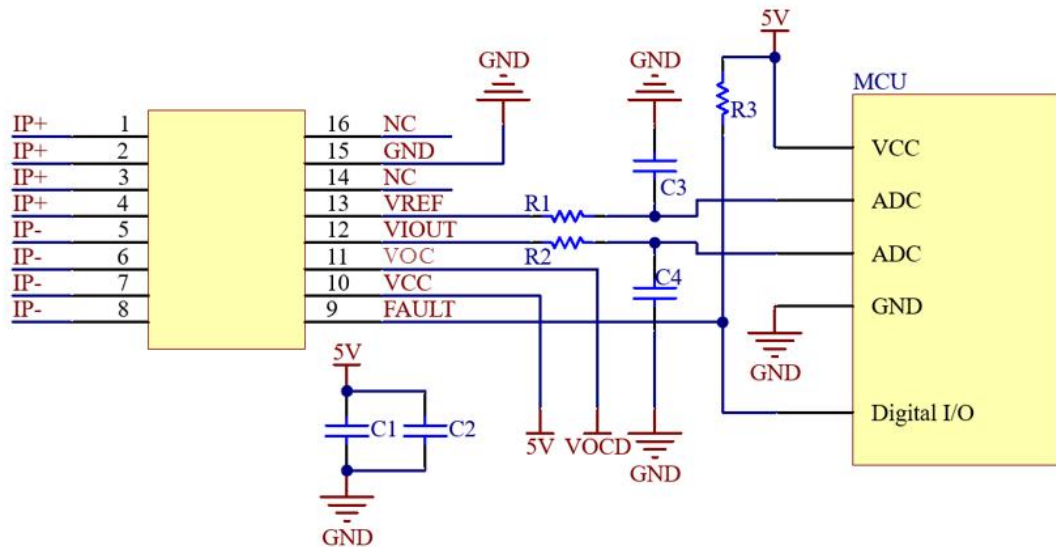

15. PACKAGE MATERIALS INFORMATION

TAPE AND REEL INFORMATION

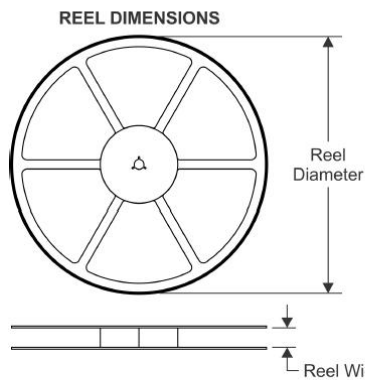

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

