


Current Sensor

Product Series: STK-616TMM

Part number: STK-616T-40MMB5
STK-616T-65MMB5
STK-616T-20MMB3
STK-616T-40MMB3
STK-616T-65MMB3

Version: Ver 2.3

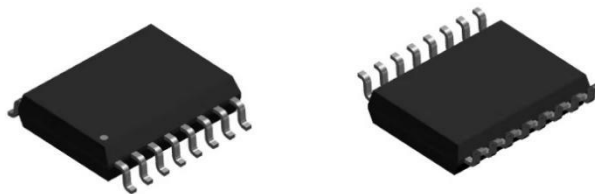

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Part number definition	3
3.	Temperature vs Current.....	4
4.	Functional Block Diagram.....	4
5.	Electrical data STK-616T-XXMMB5.....	5
6.	Electrical data STK-616T-XXMMB3.....	6
7.	Dimension & Pin definitions with OCD function	7
8.	Pin definitions	8
9.	PCB layout recommendation	8
10.	Frequency bandwidth of STK-616T-XXMMBX.....	9
11.	Step response time of STK-616T-XXMMBX.....	9
12.	The delay time of Triangular Wave	10
13.	Typical Application of STK-616TMM.....	10
14.	Examples of OCD function	11
15.	General information on OCD.....	12
16.	Package materials information.....	14

1. Description

The STK-616TM series current sensor is based on TMR (magneto resistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Inverter
- AC/DC, DC/DC power supplies
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 125
Storage temperature	TMtg	°C	-40 ~ 125
Mass	m	g	0.5

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _{cc}	V	6
ESD rating (HBM)	U _{ESD}	kV	4
Junction temperature	T _J	°C	150

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.


Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	3.6	
Impulse withstand voltage 1.2/50μs	Ū _w	kV	6	
Clearance distance (pri. -sec)	D _{ci}	mm	8	Determined by customer's layout
Creepage distance (pri. -sec)	D _{cp}	mm	8	


Measuring current table

Product	Meas. Range I _{pn} (A)	Sensitivity (mV/A)	V _{cc} (V)	T (°C)
STK-616T-20MMB3-1-1.65-E-0-C-N	±20A	66	3.3	-40 ~ 125
STK-616T-33MMB3-1-1.65-E-0-C-N	±33.3A	39.6	3.3	-40 ~ 125
STK-616T-40MMB3-1-1.65-E-2-C-N	±40A	33	3.3	-40 ~ 125
STK-616T-40MMB3-0-1.65-X-X-X-N	±40A	33	3.3	-40 ~ 125
STK-616T-65MMB3-1-1.65-E-2-C-N	±65A	20.3	3.3	-40 ~ 125
STK-616T-40MMB5-1-2.5-E-2-C-N	±40A	50	5	-40 ~ 125
STK-616T-65MMB5-1-2.5-E-2-C-N	±65A	30.8	5	-40 ~ 125


2. Part number definition

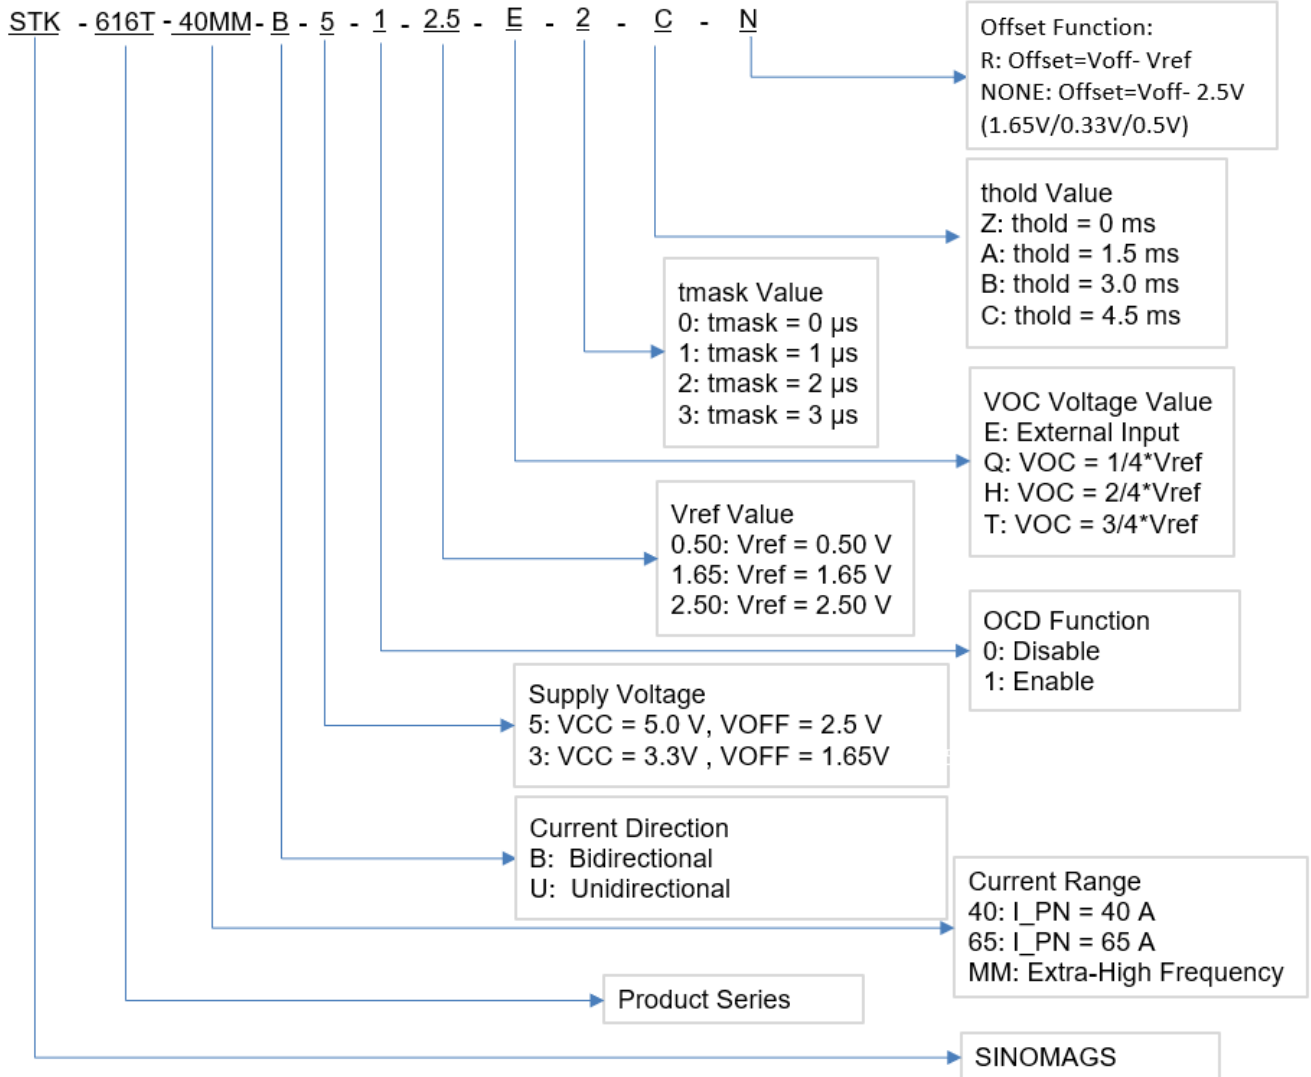

3. Temperature vs Current

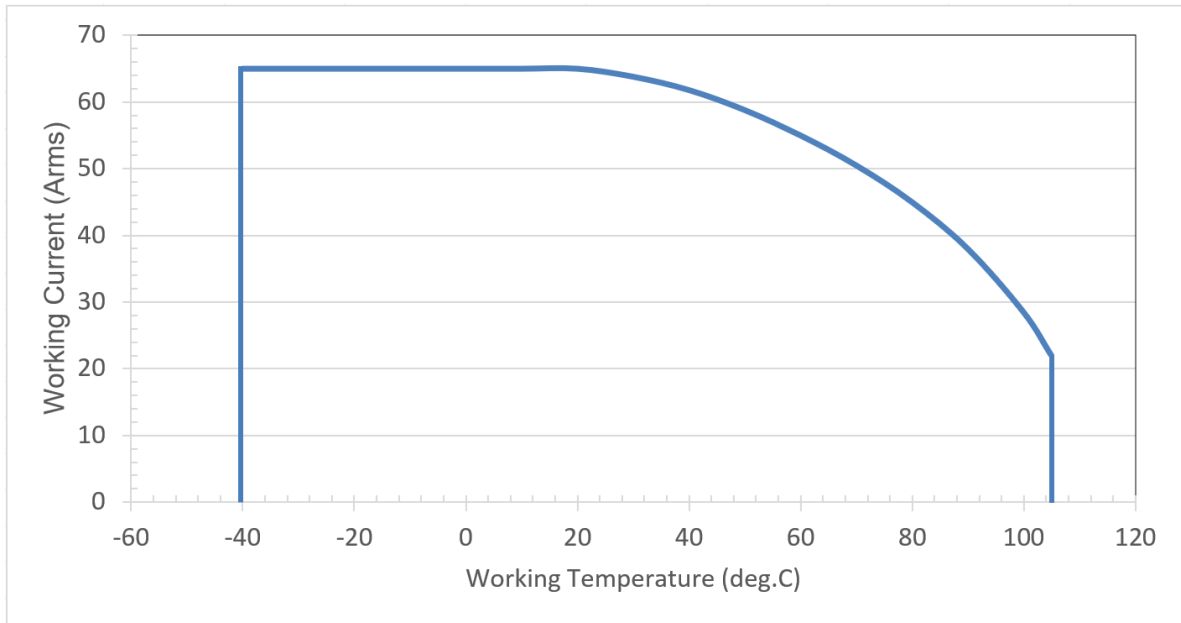

4. Functional Block Diagram

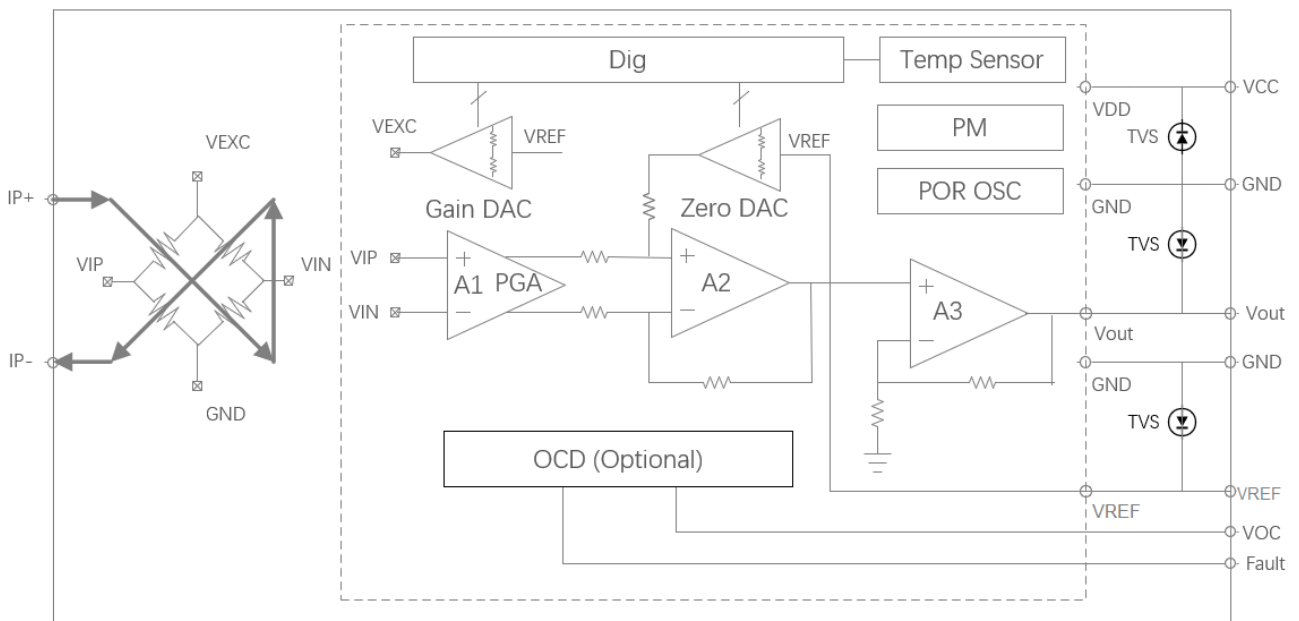

5. Electrical data STK-616T-XXMMB5

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$


Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-40		40	STK-616T-40MMB5
			-65		65	STK-616T-65MMB5
Supply voltage	V _{cc}	V	4.5	5	5.5	
Current consumption	I _{cc}	mA		7	12	
Primary conductor resistance	R _{IP}	mΩ		0.85		
Quiescent voltage@0A	V _{off}	V	2.45	2.5	2.55	
Reference voltage	V _{ref}	V	2.45	2.5	2.55	
Electrical offset voltage	Offset	mV		±10		V _{off} - V _{ref}
Output Specifications	R _{out}	Ω	1		30	
	R _{ref}		1		80	
Theoretical gain	G _{th}	mV/A		50		STK-616T-40MMB5
				30.8		STK-616T-65MMB5
OCD function (if applicable)						
OCD range	VOC	V	0.5		3.3	
FAULT error		%		5%		% of OCD
OCD	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs		2		0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25℃	Non-L	%I _{pn}		±1.5		±I _{pn}
Step response time	t _{res}	μs		0.2		@90% of I _{pn} STK-616T-XXMMBX
Frequency bandwidth	BW	MHz		0.5		@-3dB STK-616T-XXMMBX
Output voltage noise	Vnoise	mVpp		10		@1.4 MHz
Accuracy @ 25℃	X	% I _{pn}		±1.5		@ 0.5*I _{pn}
Thermal drift of G _{th}	GAIN_T	% G _{th}		±1.5		@ -40~105℃ drift related to the value @25℃
Thermal drift of V _{off}	Voff_T	mV		±15		
Total Accuracy	X_TRange	% I _{pn}		±3.5		

6. Electrical data STK-616T-XXMMB3

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 3.3\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-20		20	STK-616T-20MMB3
			-40		40	STK-616T-40MMB3
			-65		65	STK-616T-65MMB3
Supply voltage	V _{cc}	V	3.15	3.3	3.45	
Current consumption	I _{cc}	mA		7	12	
Primary conductor resistance	R _{IP}	mΩ		0.85		
Quiescent voltage@0A	V _{off}	V	1.6	1.65	1.7	
Reference voltage	V _{ref}	V	1.6	1.65	1.7	
Electrical offset voltage	Offset	mV		±10		V _{off} - V _{ref}
Output Specifications	R _{out}	Ω	1		30	
	R _{ref}		1		80	
Theoretical gain	G _{th}	mV/A		66		STK-616T-20MMB3
				33		STK-616T-40MMB3
				20.3		STK-616T-65MMB3
OCD function (if applicable)						
OCD range	VOC	V	0.3		1.6	
FAULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs		2		0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25°C	Non-L	%I _{pn}		±1.5		±I _{pn}
Step response time	t _{res}	μs		0.2		@90% of I _{pn} STK-616T-XXMMBX
Frequency bandwidth	BW	MHz		0.5		@-3dB STK-616T-XXMMBX
Output voltage noise	Vnoise	mVpp		10		@1.4 MHz
Accuracy @ 25°C	X	% I _{pn}		±1.5		@ 0.5*I _{pn}
Thermal drift of G _{th}	GAIN_T	% G _{th}		±1.5		@ -40~105°C drift related to the value @25°C
Thermal drift of V _{off}	Voff_T	mV		±15		
Total Accuracy	X_TRange	% I _{pn}		±3.5		

7. Dimension & Pin definitions with OCD function

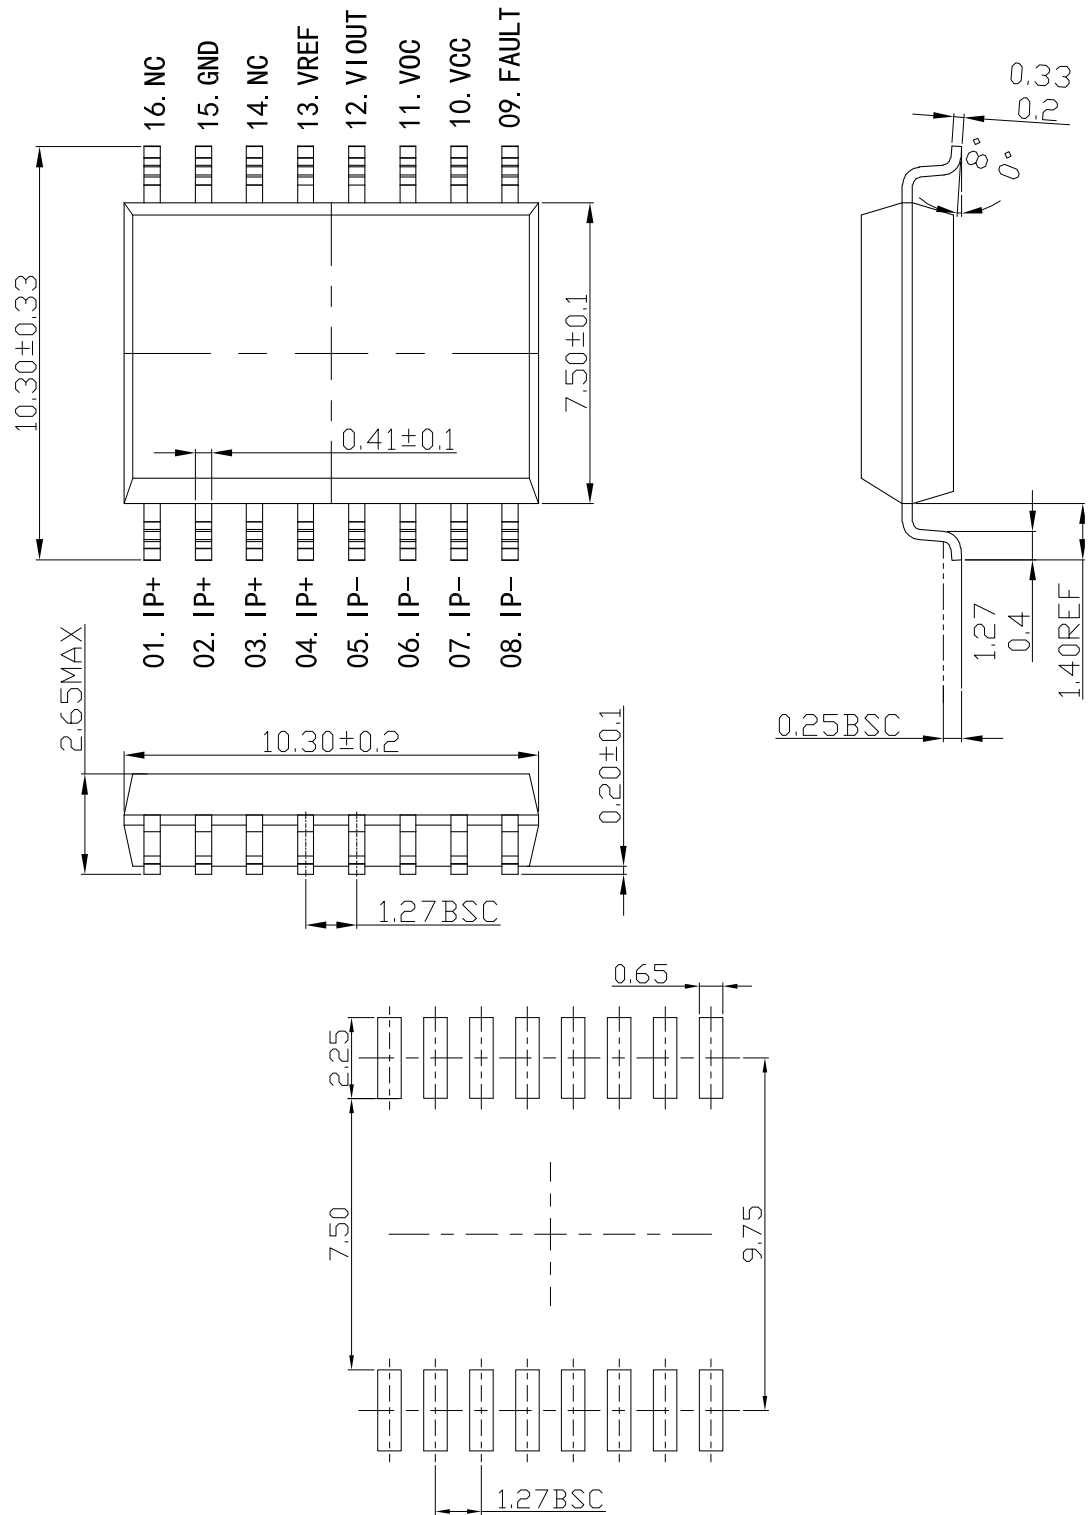


PCB Layout Reference View

8. Pin definitions


Pin definition for product with OCD function

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	FAULT	Over current detection alarm output, the pin is open leakage output. Normally, the output of fault pin is high level.
10	VCC	Power supply pin
11	VOC	Over current detection threshold input pin
12	VIOUT	Sensor output pin
13	VREF	Reference pin, output function
14	NC	No connection
15	GND	Ground pin (GND)
16	NC	No connection


9. PCB layout recommendation

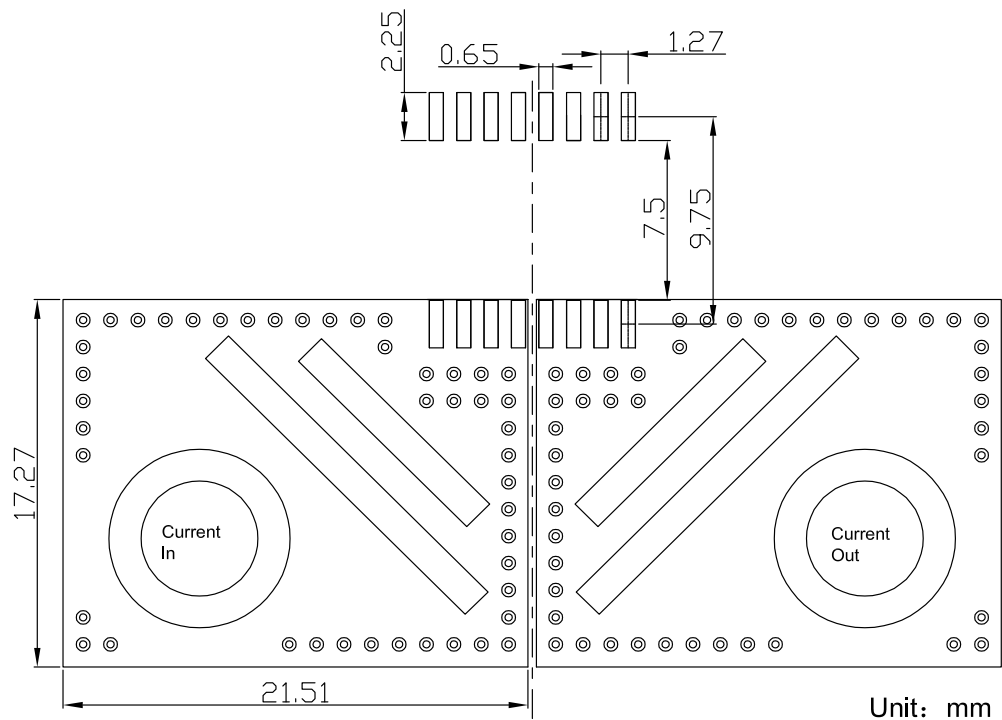

10. Frequency bandwidth of STK-616T-XXMMBX

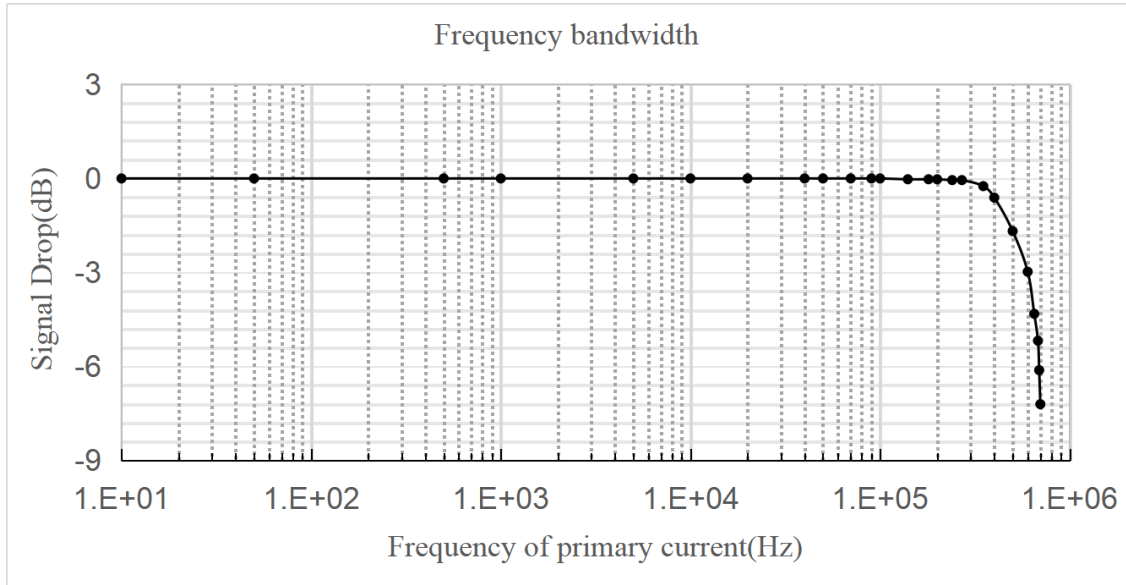


11. Step response time of STK-616T-XXMMBX

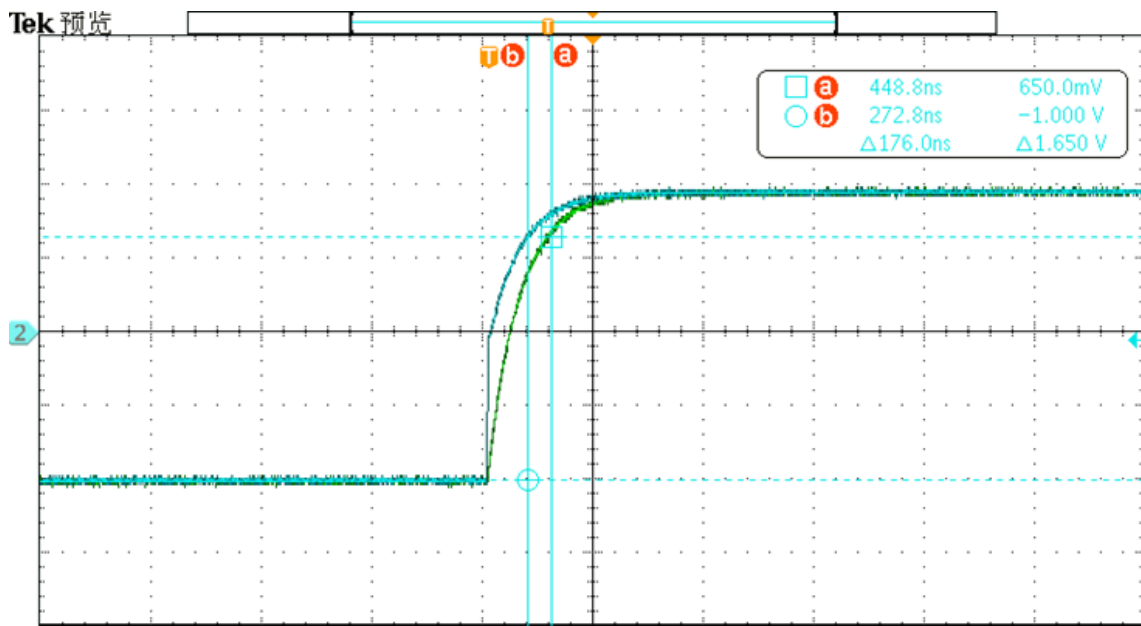


The typical high frequency response of STK-616TM current sensor. The response time from 90% of the primary current to 90% of the secondary output is 0.2 μ s.

12. The delay time of Triangular Wave

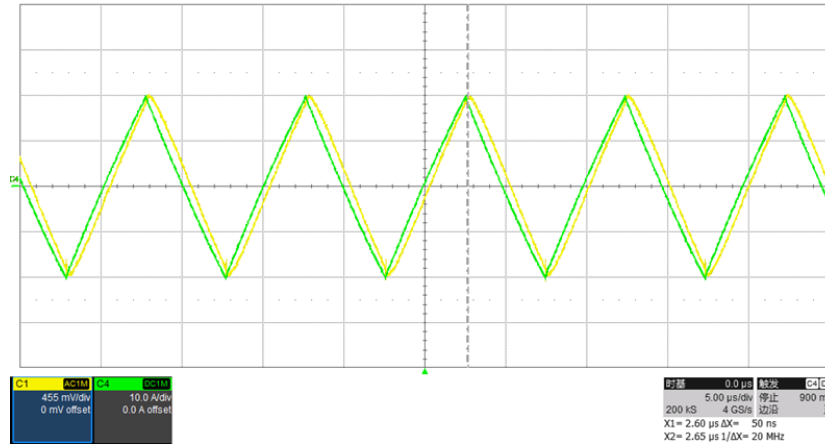


100 kHz Triangular delay---0.2 μs

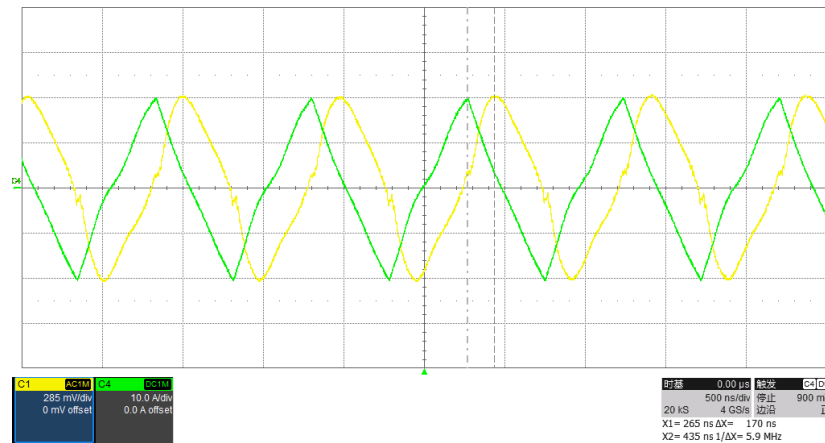


1 MHz Triangular delay---0.2 μs


13. Typical Application of STK-616TMM

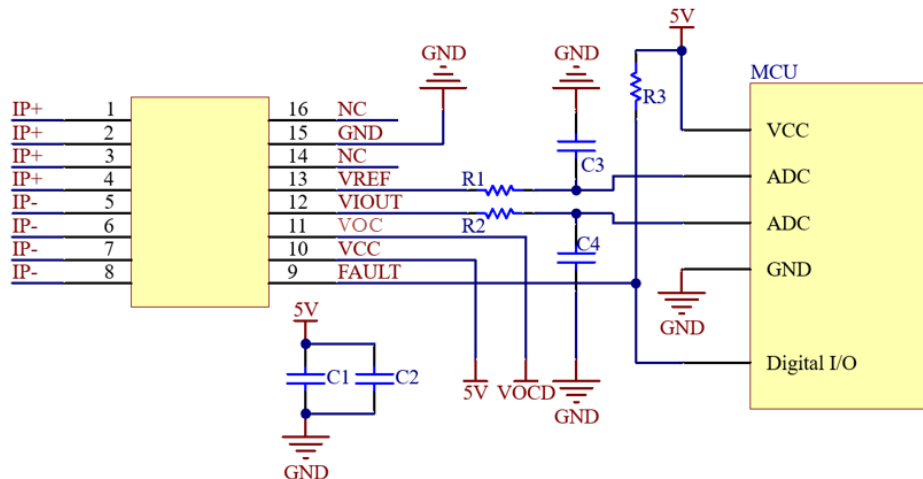

14.Examples of OCD function

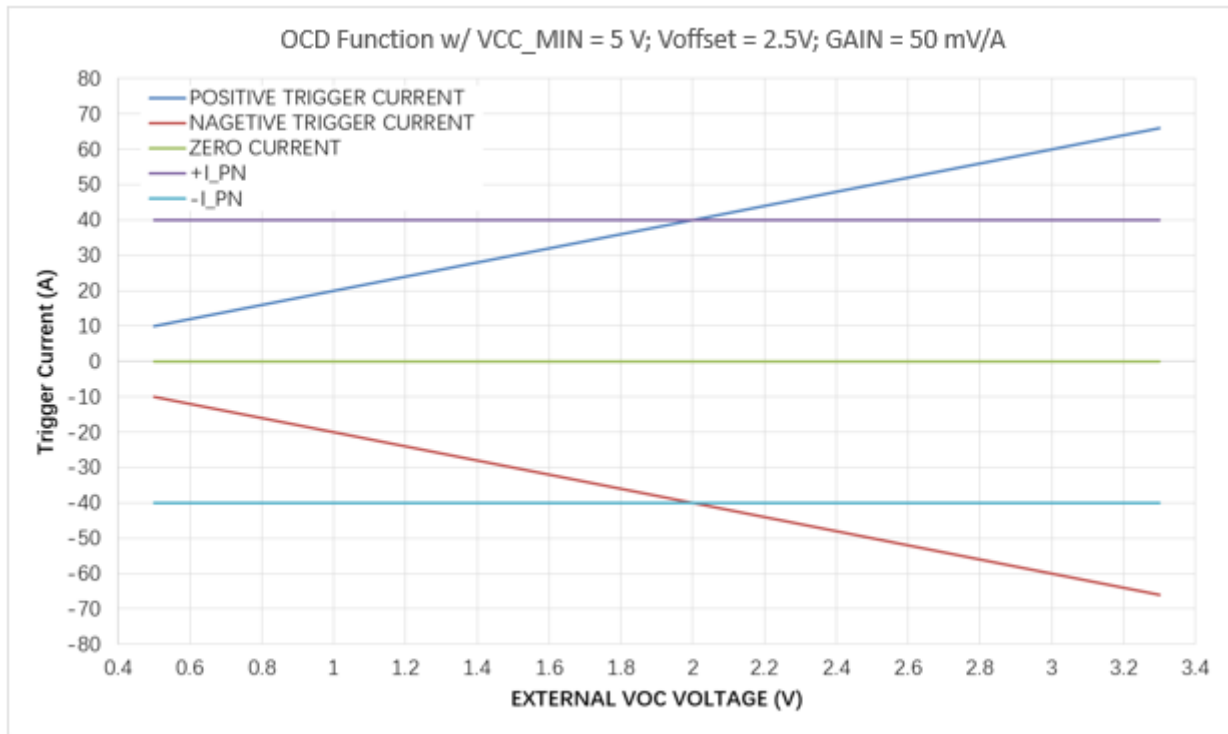

OCD function for STK-616T-40MMB5

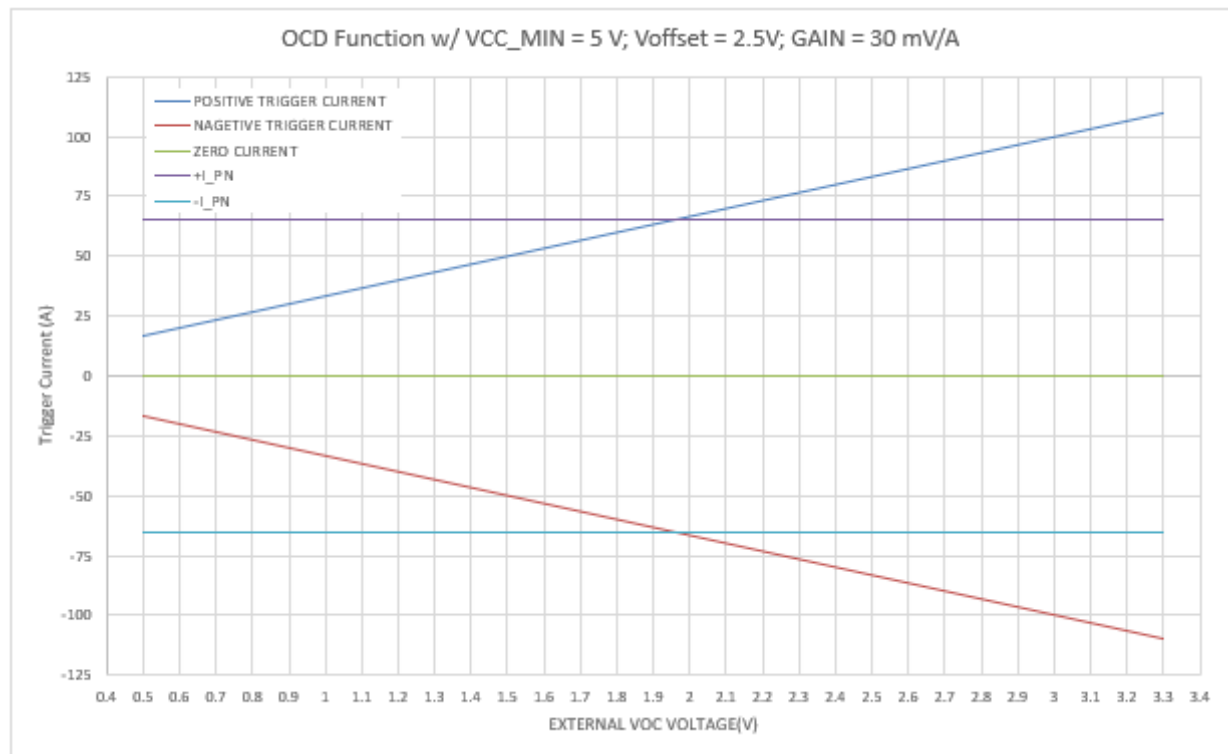


OCD function for STK-616T-65MMB5

15. General information on OCD


This section describes the general information on OCD function, the specific functions, which are not listed in the section of “electrical data”, can be defined per request.

Since the trigger voltage is set after the second amplifier, the OCD function supports that the trigger current can be higher than I_{pn} . The trigger voltage can be defined:

- a) $V_{ref} = 2.5\text{ V}$
 - ①. $0.5\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm V_{OC}$;
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$;
- b) $V_{ref} = 1.65\text{ V}$
 - ①. $0.3\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm V_{OC}$;
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$
- c) $V_{ref} = 0.5\text{ V}$
 - ①. $0.2\text{ V} \leq V_{OC} \leq 0.5\text{ V}$;
 - ②. Trigger voltage = $V_{ref} + 8 \cdot V_{OC}$;
 - ③. Trigger current = $(V_{ref} + V_{OC} - V_{off}) / G_{th}$


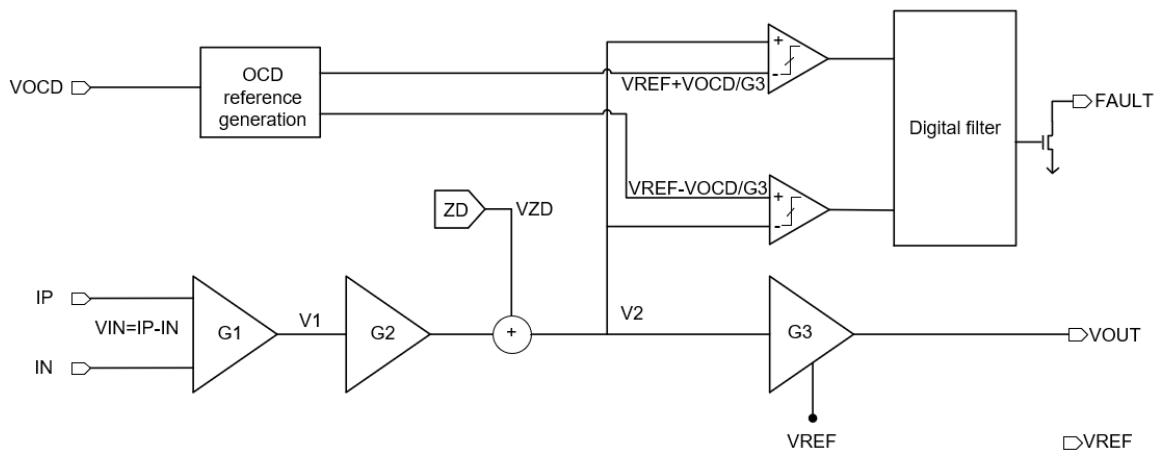


Functional Block Diagram on OCD function when $V_{ref} = 2.5\text{ V}$

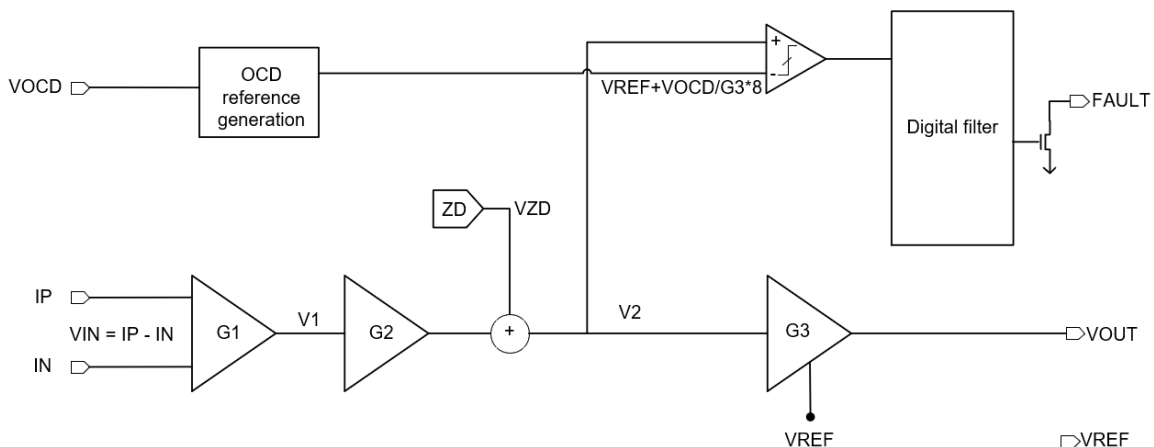


Functional Block Diagram on OCD function when $V_{ref} = 0.5\text{ V}$

With the above definition, below shows the relationship between trigger voltage and the setting of Vcc, VOC.

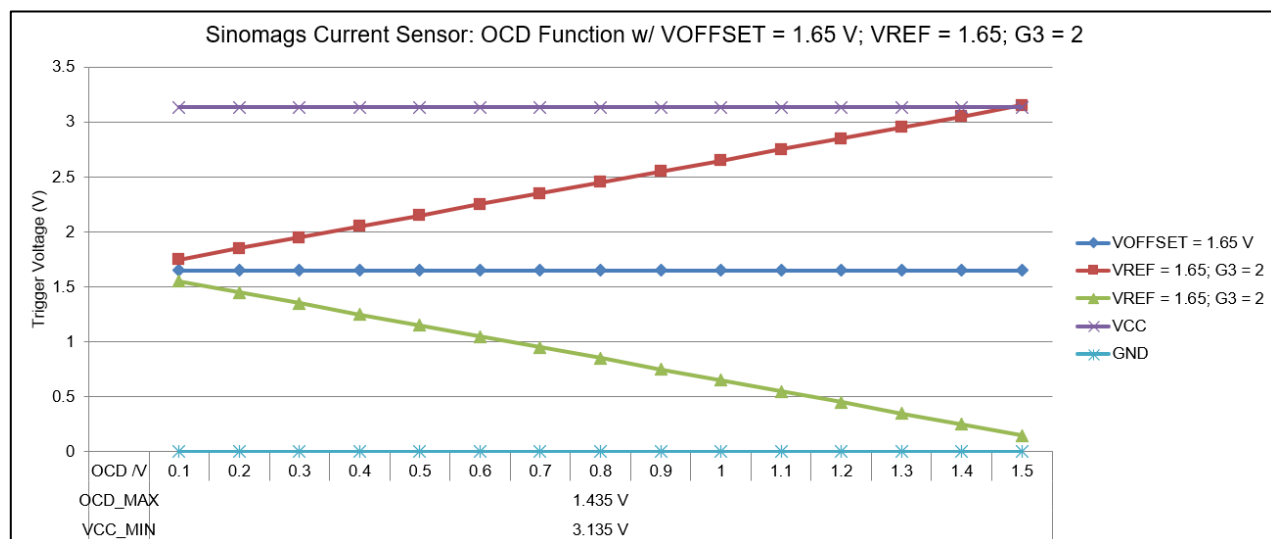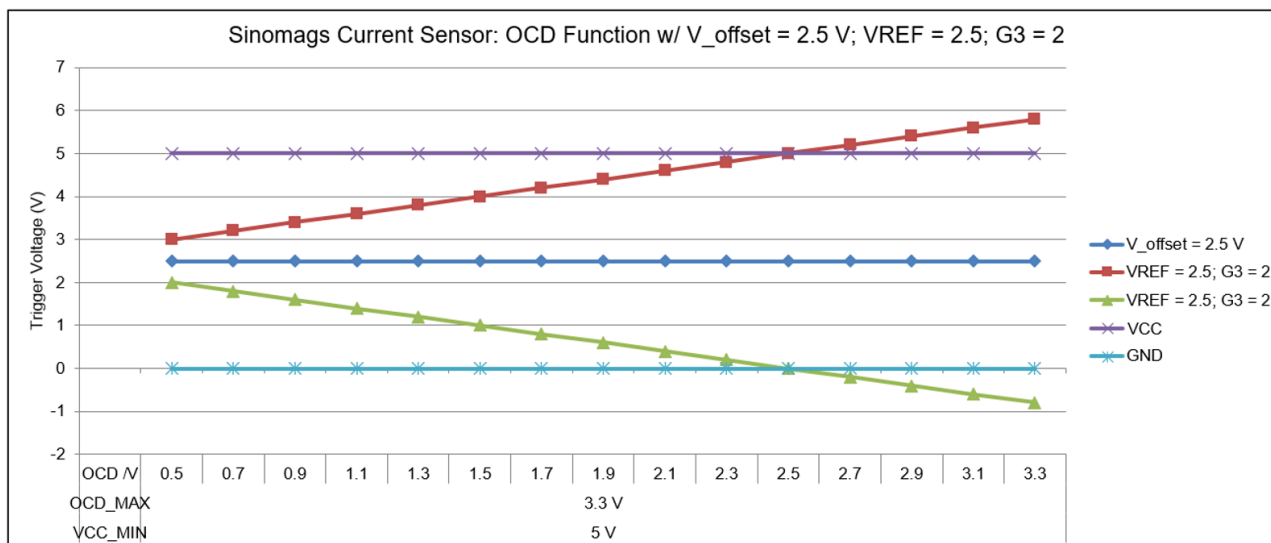

16.Package materials information

TAPE AND REEL INFORMATION

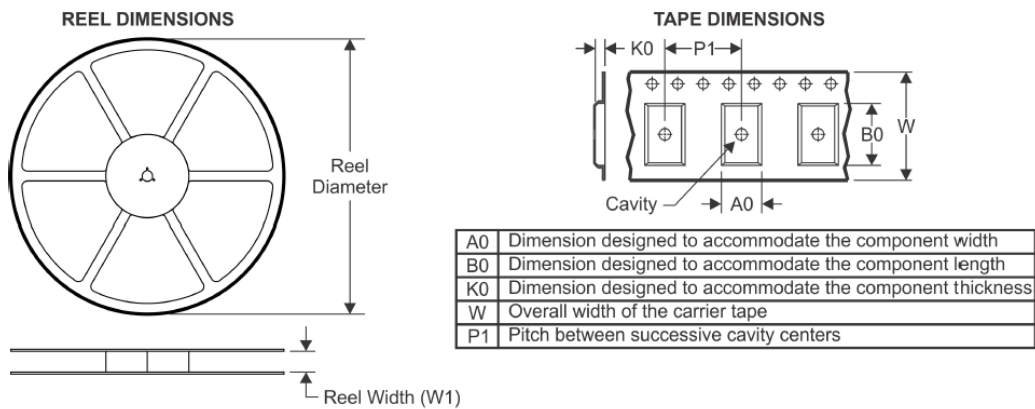

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

