


Current Sensor

Product Series: STK-616K

Part number: STK-616K-40FC
STK-616K-65FC

Version: Ver 2.2

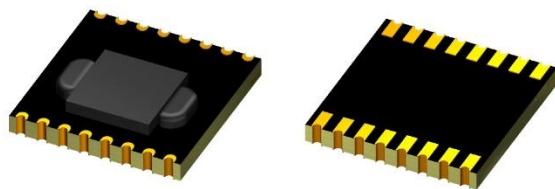

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1. Description	2
2. Part number definition	3
3. Temperature vs Current	3
4. Electrical data STK-616K-xxFC	4
5. Dimension & Pin definitions without OCD function	5
6. Dimension & Pin definitions with OCD function	6
7. Pin definitions	7
10. Response Time	8
11. Typical Application of STK-616K	9
12. Examples of OCD function	10
13. General information on OCD	11
14. PACKAGE MATERIALS INFORMATION	13

1. Description

The STK-616K series current sensor is based on TMR (tunnel magnetoresistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Inverter
- Electric welder power supply
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 125
Storage temperature	T_stg	°C	-40 ~ 125
Mass	m	g	0.5

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	Vcc	V	6
ESD rating (HBM)	U_ESD	kV	4
Junction temperature	T_J	°C	150

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.


Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	Ud	kV	2	
Impulse withstand voltage 1.2/50μs	Üw	kV	10	
Clearance distance (pri. -sec)	dCl	mm	6	Determined by customer's layout
Creepage distance (pri. -sec)	dCp	mm	6	


Measuring current table

Product	Optimized Range I_pn (A)	Sensitivity, (mV/A)	Vcc(V)	T(°C)
STK-616K-40FC-1-1.65-E-2-C	±40A	33	3.3V	-40 ~ 125
STK-616K-40FC-1-1.65-E-1-Z	±40A	33	3.3V	-40 ~ 125
STK-616K-65FC-1-1.65-E-2-C	±65A	20	3.3V	-40 ~ 125
STK-616K-40FC-1-1.65-E-2-Z	±40A	33	3.3V	-40 ~ 125
STK-616K-65FC-1-1.65-E-1-Z	±65A	20	3.3V	-40 ~ 125
STK-616K-65FC-1-1.65-E-2-Z	±65A	20	3.3V	-40 ~ 125
STK-616K-40FC-0-1.65	±40A	33	3.3V	-40 ~ 125

2. Part number definition

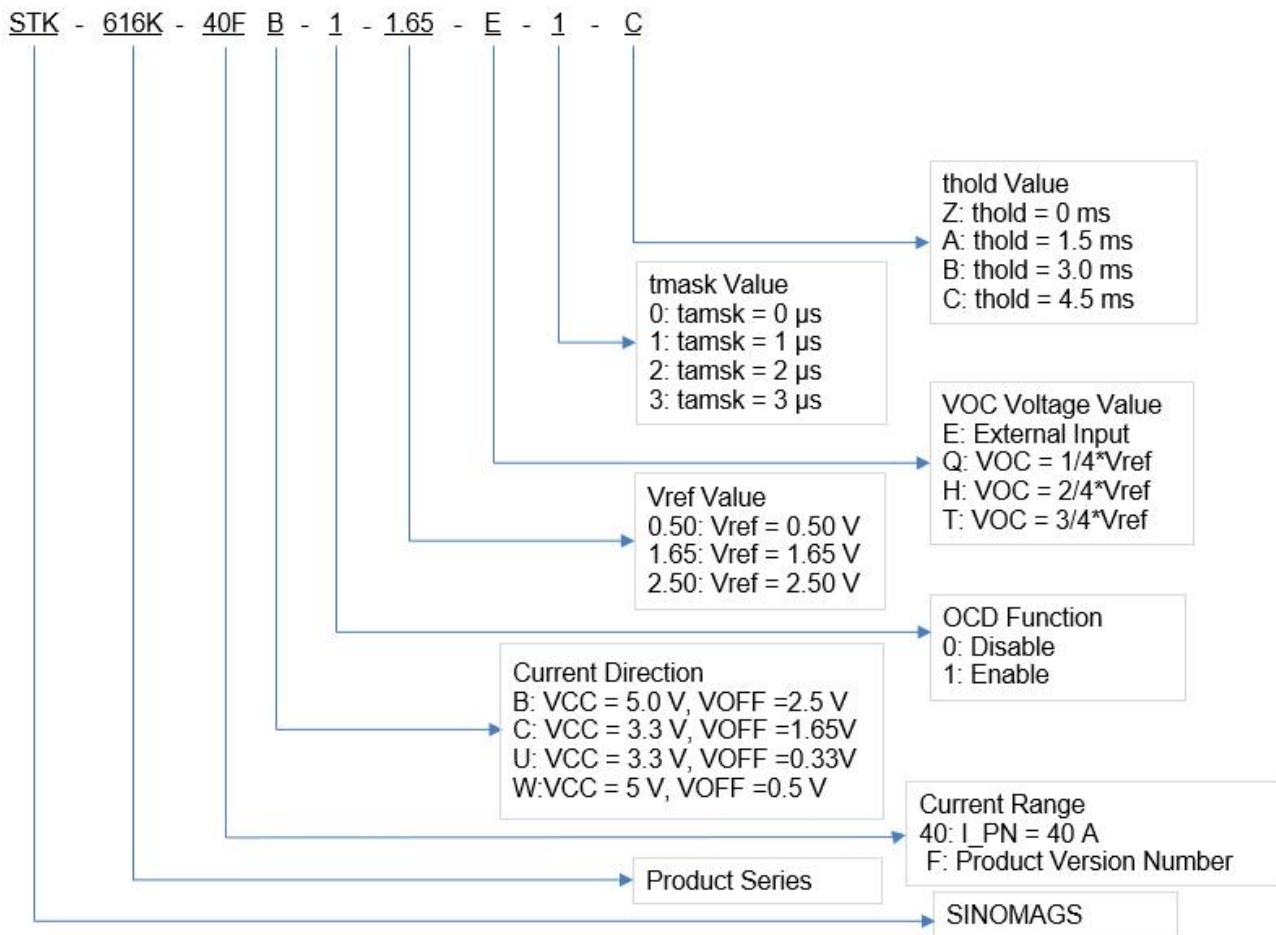

3. Temperature vs Current

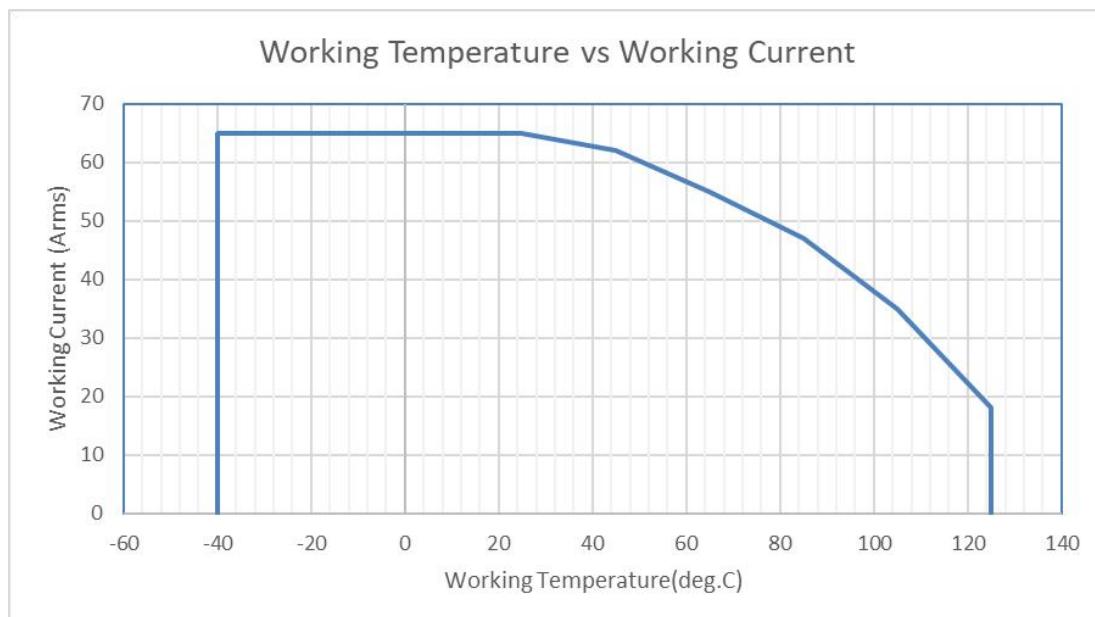


4. Electrical data STK-616K-xxFC

Condition: T_A = 25°C, Vcc = 3.3 V


Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I_pn	A	-40		40	STK-616K-40FC
			-65		65	STK-616K-65FC
Supply voltage	Vcc	V	3.15	3.3	3.45	
Current consumption	Icc	mA		7	12	
Quiescent voltage	Voff	V	1.6	1.65	1.7	
Internal output resistance	Rout	Ω	1		30	
Theoretical gain	G_th	mV/A		33		STK-616K-40FC
				20		STK-616K-65FC
OCD function (if applicable)						
OCD range	VOC	V	0.3		1.6	
FOULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs		1		0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Rated linearity error@25°C	Non-L	% I_pn		±1.5		±I_pn
Accuracy performance						
Delay time	t_delay	μs		0.2		@400 kHz
Step response time	t_res	μs		0.5		@90% of I_pn
Frequency bandwidth	BW	MHz		1		@-3dB
Output voltage noise	Vnoise	mVpp		20		100 ~ 120 kHz @250 kHz S.R.
Accuracy @ 25°C	X	% I_pn		±1.5		@ 0.5*I_pn
Thermal drift of G_th	Gain_T	% of G_th	-1.5		1.5	@ -40~105°C drift related to the value @25°C
Thermal drift of Voff	Voff_T	mV	-15		15	
Total Accuracy	X_TRange	% of I_pn	-3		3	

5. Dimension & Pin definitions without OCD function

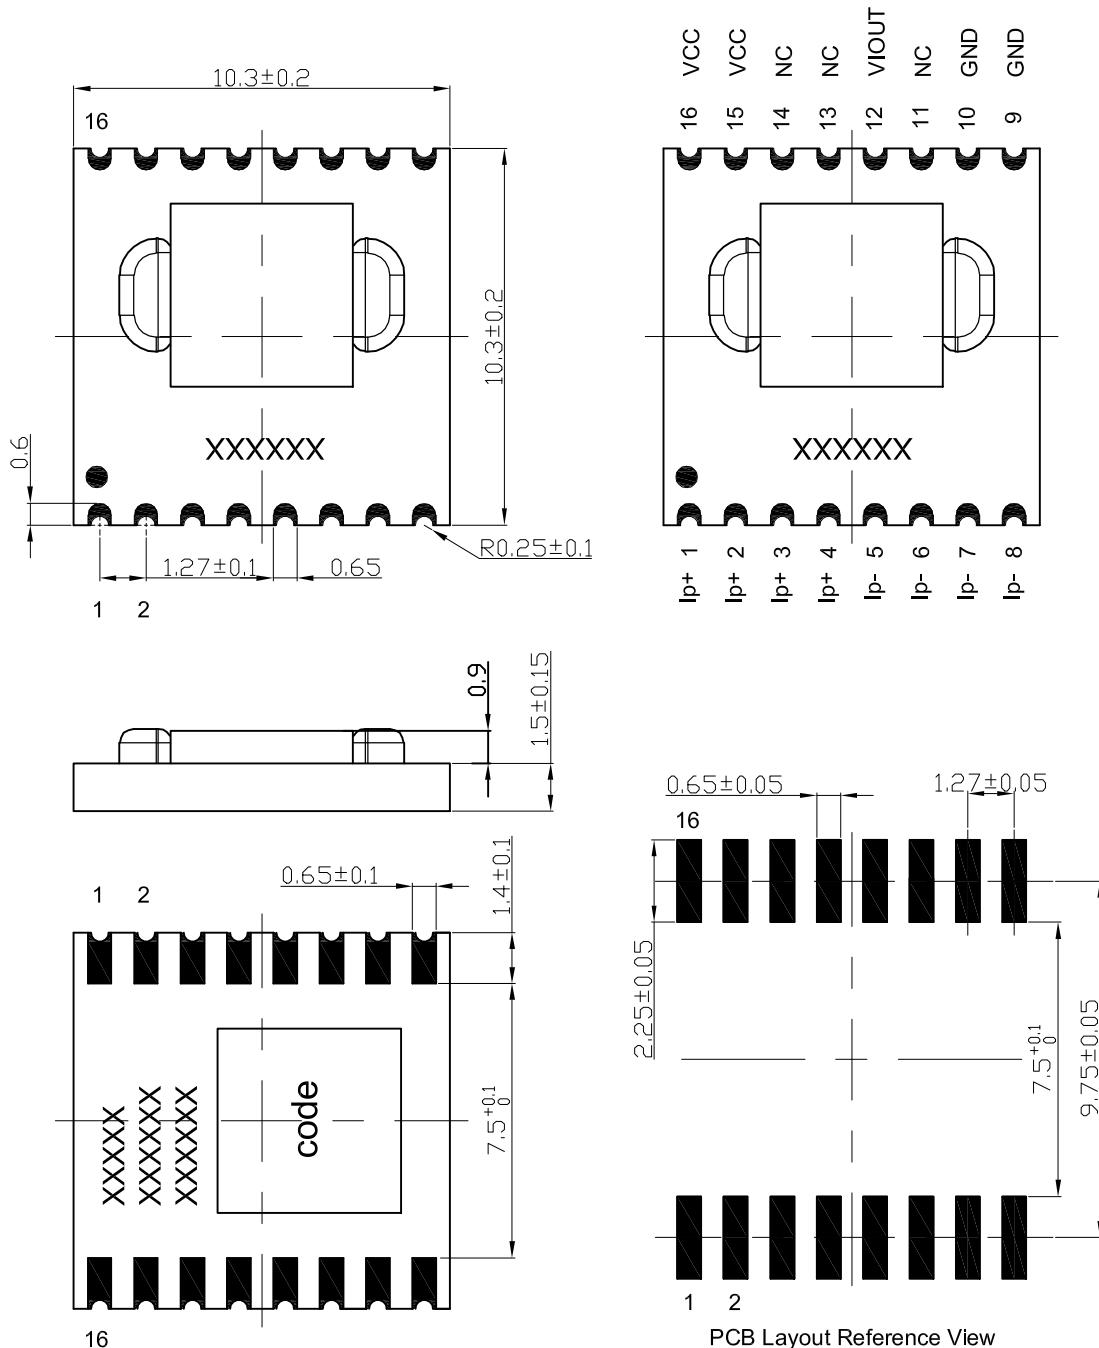

The mark of "KXXFB" on the top surface shows the information on the "Part number": "K" = "STK-616K", "XX" = "Product sensing range", "B" = "Current direction", "F"="Product Version Number".

6. Dimension & Pin definitions with OCD function

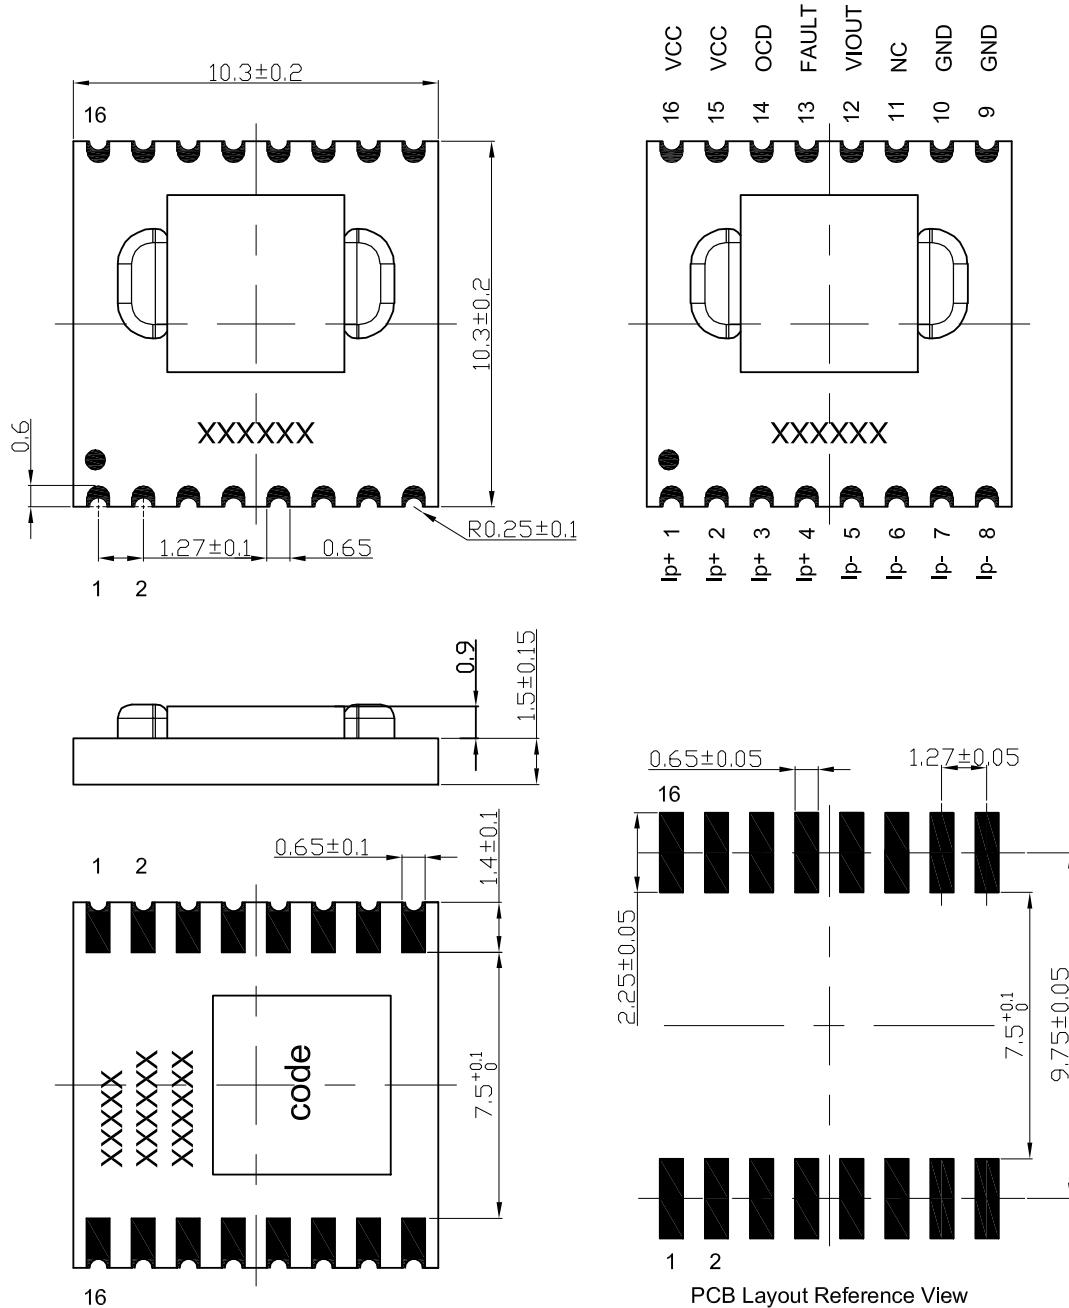


The mark of "KXXFC" on the top surface shows the information on the "Part number": "K" = "STK-616K", "XX" = "Product sensing range", "C" = "Current direction", "F" = "Product Version Number".


7. Pin definitions

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9,10	GND	Ground pin (GND)
11	NC	Internal use only
12	VOUT	Sensor output pin
13	FAULT	Over current detection alarm output, the pin is open leakage output. Normally, the output of fault pin is high level
14	OCD	Over current detection threshold input pin
15,16	VCC	Power supply pin


8. PCB layout recommendation

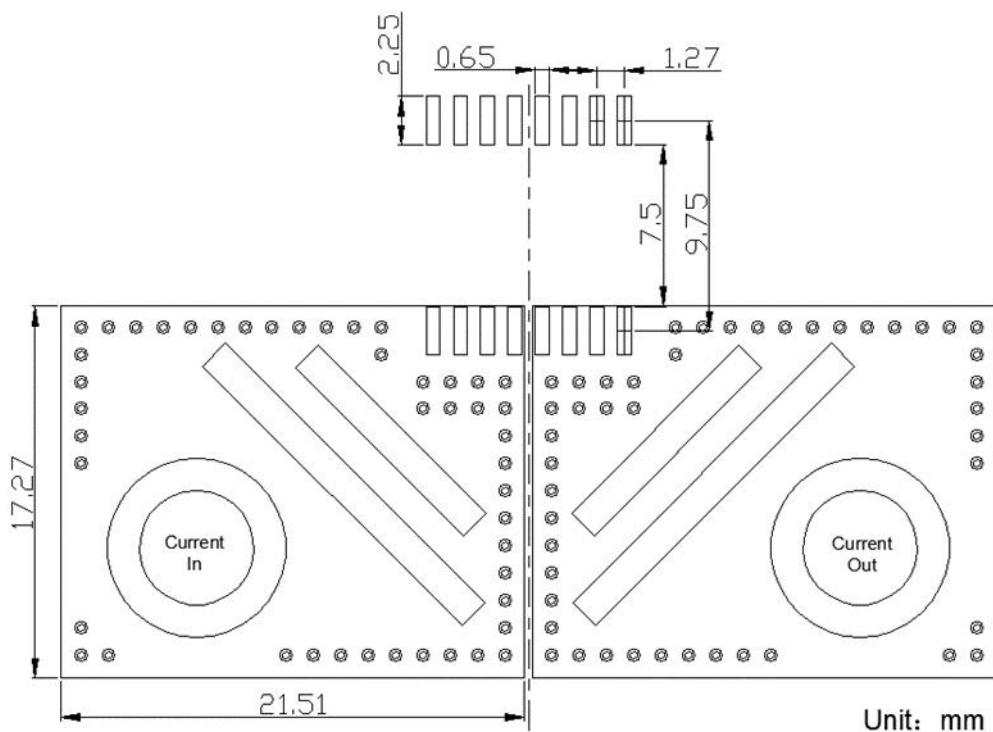

9. Frequency band width

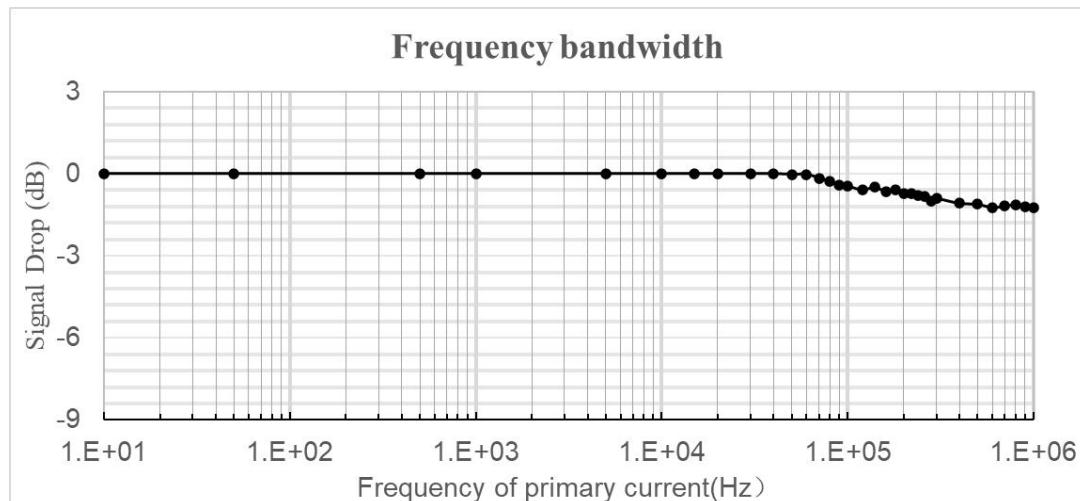


10. Response Time

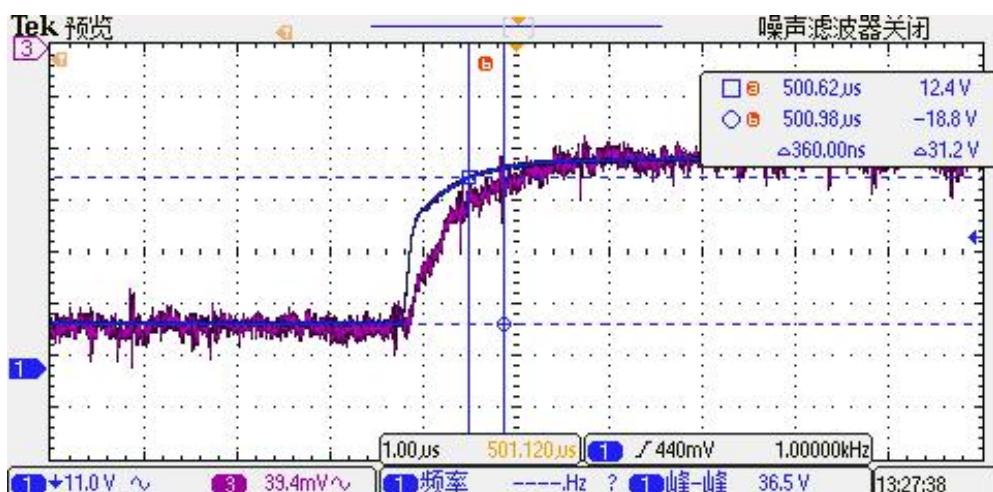

The typical frequency response of STK-616K current sensor. The response time from 90% of the primary current (pink) to 90% of the secondary output is 0.36 μ s.

11. Typical Application of STK-616K

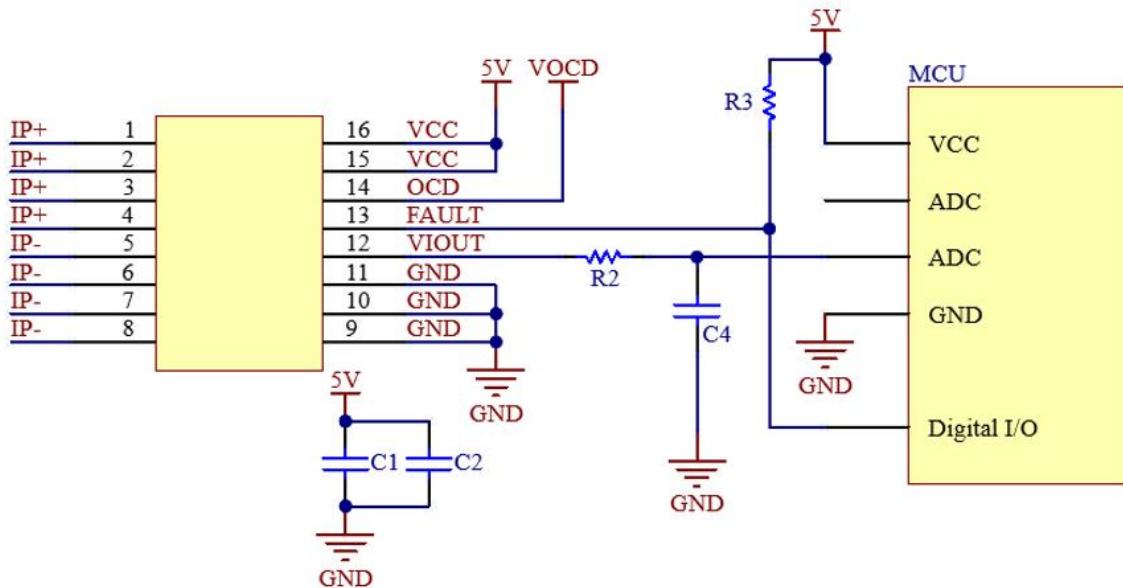

Remark:


With below recommended setting, the response speed of the chip will be not affected:

R3 = 5 kΩ, C1 = 1 μF, C2 = 10 nF, C4 = 50 pF.

While, R2 and C4 constitute RC filter circuit. The relationship between RC value and frequency is shown in below Table

R2 (kohm)	C4 (nF)	Theoretical band width $f = 1/(2\pi RC)$ (kHz)	Measured band width (kHz)
1	1	150	~ 150
0.4	1	400	~ 400
0.16	1	1000	~ 1000

12.Examples of OCD function

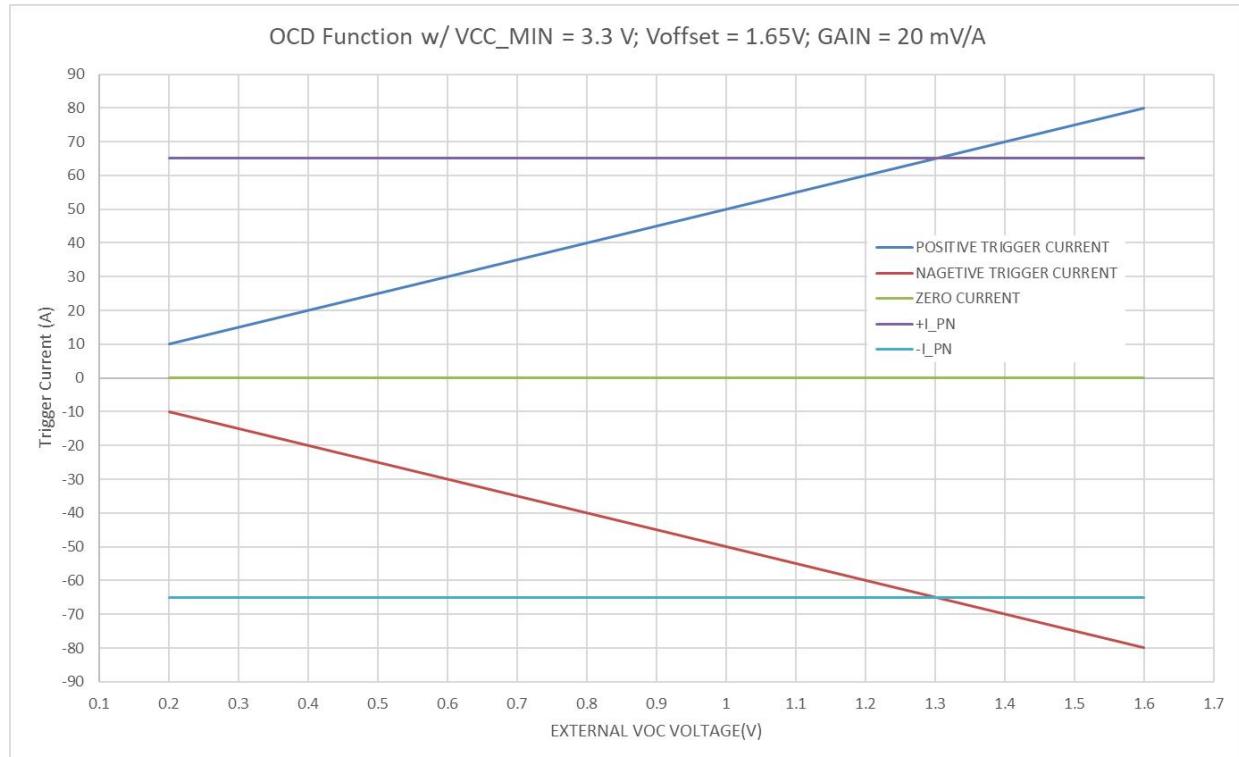


OCD function for STK-616K-65FC

13. General information on OCD


This section describes the general information on OCD function, the specific functions, which are not listed in the section of "electrical data", can be defined per request.

Since the trigger voltage is set after the second amplifier, the OCD function supports that the trigger current can be higher than I_{pn} . The trigger voltage can be defined:

- a) $V_{ref} = 2.5 \text{ V}$
 - a) $0.5 \text{ V} \leq VOC \leq V_{cc} - 1.7 \text{ V};$
 - b) Trigger voltage = $V_{ref} +/- VOC;$
 - c) Trigger current = $(V_{ref} +/- VOC - V_{off}) / G_{th};$
- b) $V_{ref} = 1.65 \text{ V}$
 - a) $0.3 \text{ V} \leq VOC \leq V_{cc} - 1.7 \text{ V};$
 - b) Trigger voltage = $V_{ref} +/- VOC;$
 - c) Trigger current = $(V_{ref} +/- VOC - V_{off}) / G_{th}$
- c) $V_{ref} = 0.5 \text{ V}$
 - a) $0.2 \text{ V} \leq VOC \leq 0.5 \text{ V};$
 - b) Trigger voltage = $V_{ref} + 8*VOC;$
 - c) Trigger current = $(V_{ref} + VOC - V_{off}) / G_{th}$

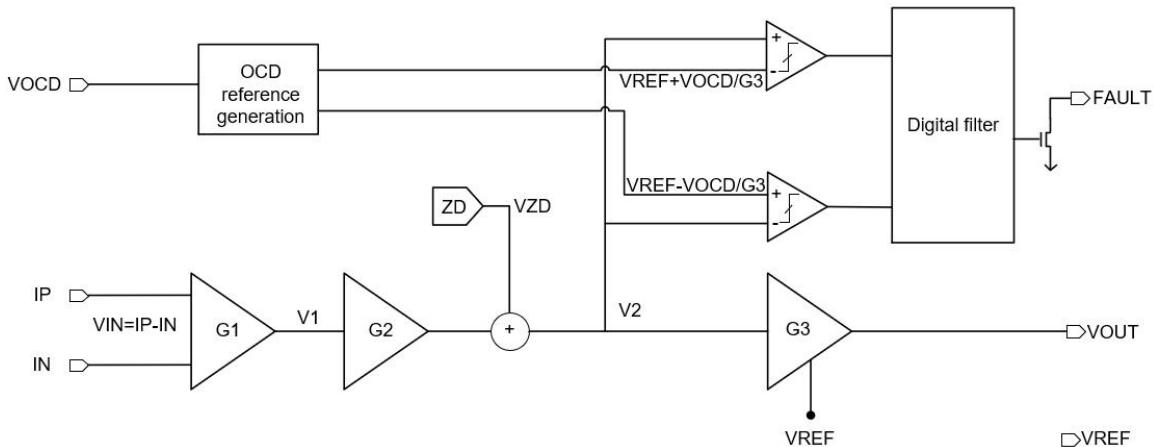


Functional Block Diagram on OCD function when $V_{ref} = 2.5 \text{ V}$

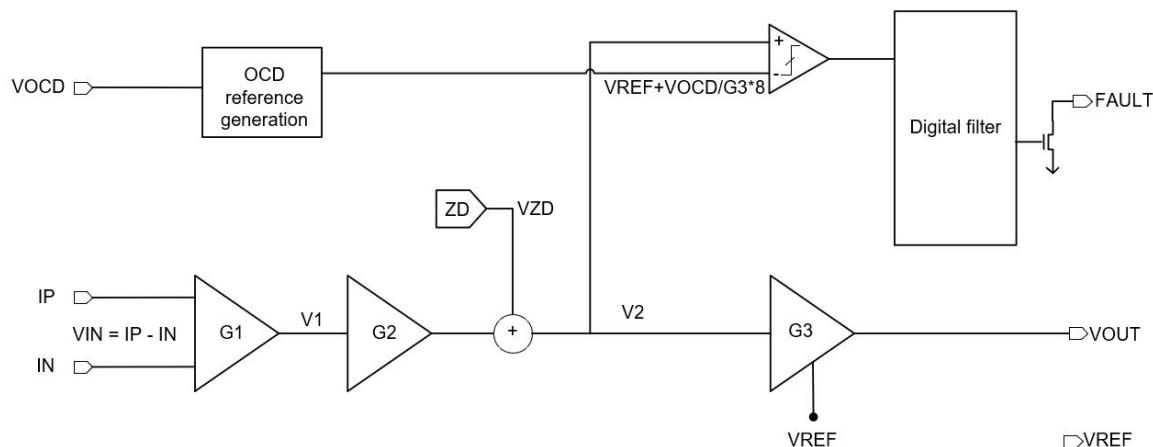


Functional Block Diagram on OCD function when $V_{ref} = 0.5 \text{ V}$

With the above definition, below shows the relationship between trigger voltage and the setting of Vcc, VOC.

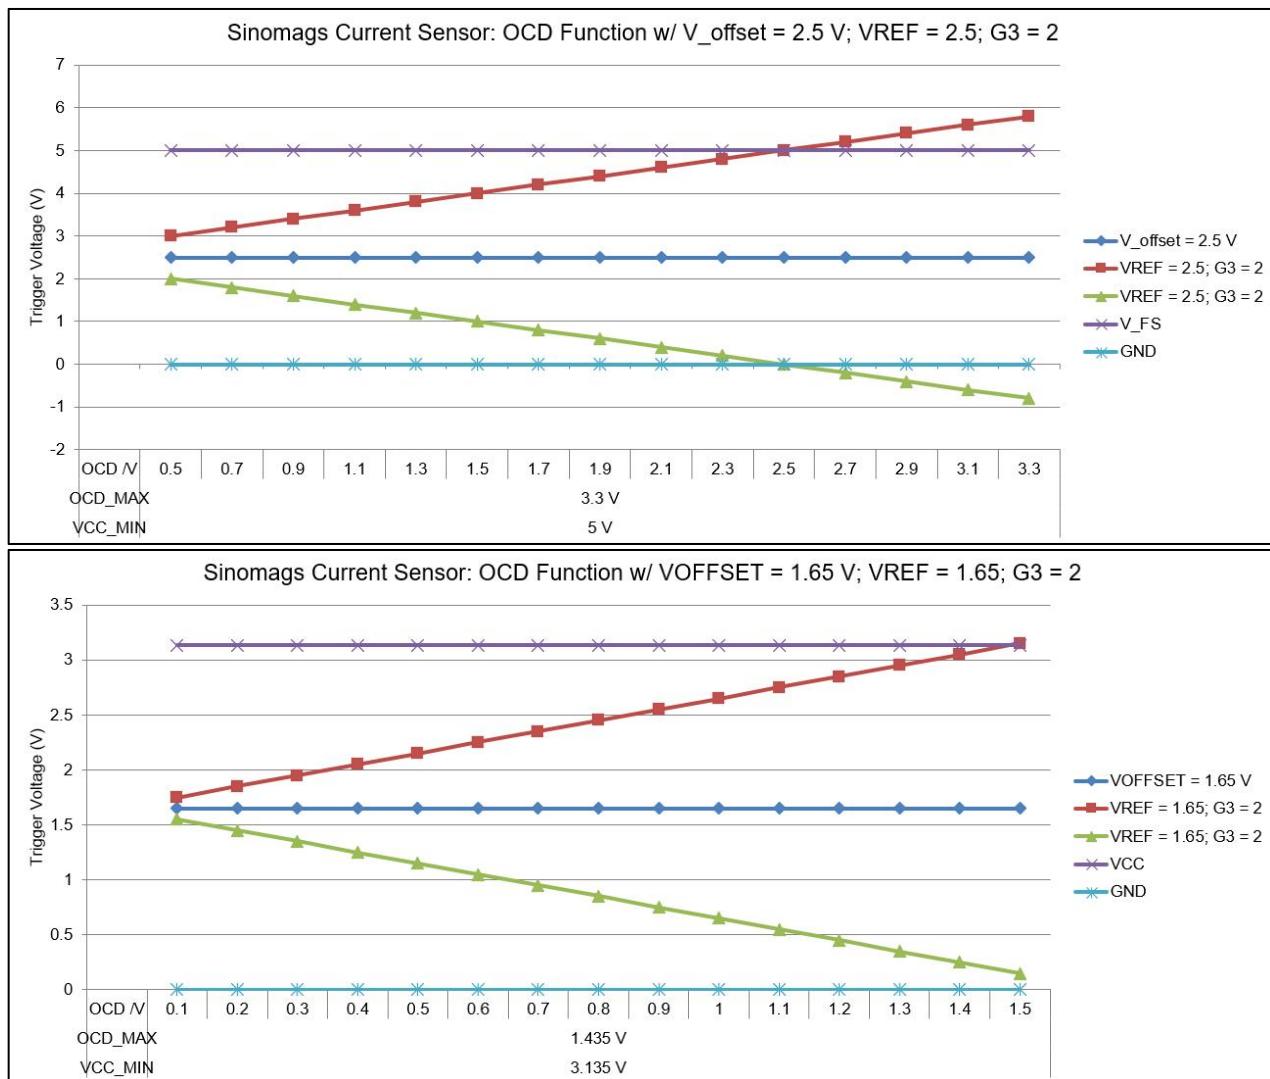

14. PACKAGE MATERIALS INFORMATION

TAPE AND REEL INFORMATION

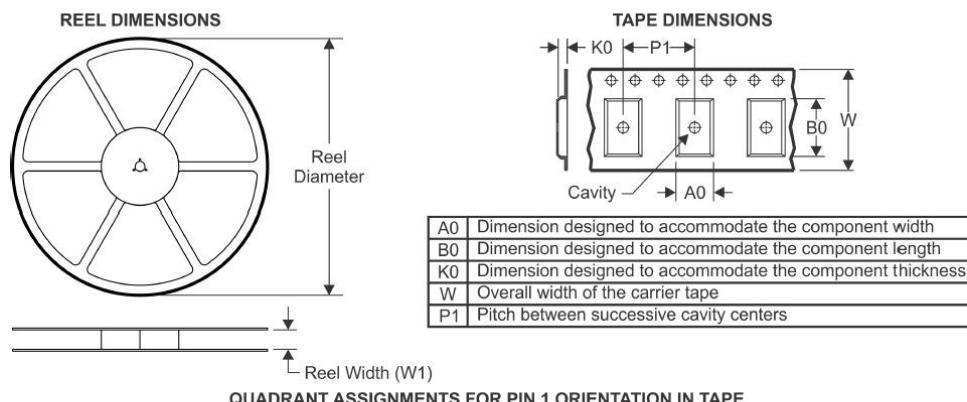

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

