
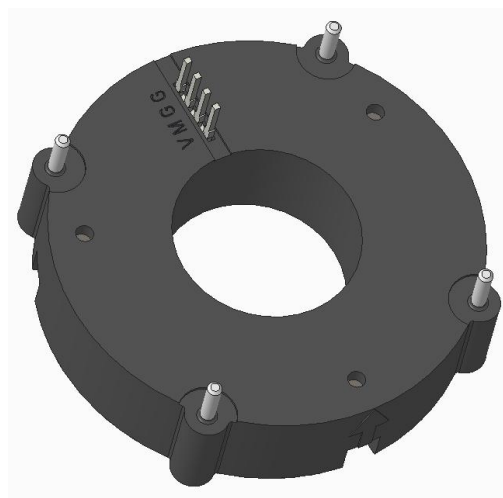


Current Sensor

Product Series: SHK-VBS

Part number: SHK-VBS-TE-200-S2

Version: Ver 1.3

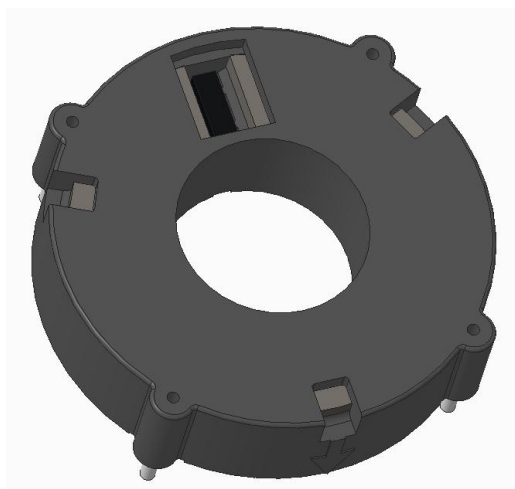

Sinomags Technology Co., Ltd.

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Electrical data	3
3.	Dimension & Pin definitions	5

1. Description

The SHK-VBS-TE-200-S2 current sensor is based on Hall and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Electric welder power supply
- Inverter
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_a	°C	-40 ~ 125
Storage temperature	T_{stg}	°C	-40 ~ 125
Mass	m	g	14

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V_{cc}	V	-0.5 ~ 8 (Not operating)
			6.5
Electrostatic discharge voltage	$U_{ESD\ HBM}$	kV	4

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
Insulation voltage	U_d	kV	1.5	RMS voltage for AC test 50Hz-1 min, Leakage current less than 1mA
Insulation resistance	R_{INS}	MΩ	500	DC 500V, ISO 16750
Clearance distance (pri. -sec)	d_{Cl}	mm	1.5	Shortest distance through air
Creepage distance (pri. -sec)	d_{Cp}	mm	1.5	Shortest path along device body
Comparative tracking index	CTI		PLC 0	
Case material			V0 according to UL 94	PA66-GF30(Durethan AKV30FN04LT 904040)


2. Electrical data

Condition: $T_a = 25^{\circ}\text{C}$, $V_{CC} = 5.0\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary current measuring range	I_{PM}	A	-200		200	SHK-VBS-TE-200-S2
Supply voltage	V_{CC}	V	4.75	5	5.25	All
Current consumption	I_{CC}	mA		15		@ $V_{CC} = 5.0\text{ V}$
Output voltage	V_{OUT}	V	$(V_{CC}/5) \times (V_{off} + G \times I_{PM})$			@ $T_a = 25^{\circ}\text{C}$
Quiescent voltage	V_{off}	V		2.5		@ $T_a = 25^{\circ}\text{C}$, $V_{CC} = 5.0\text{ V}$
Sensitivity	G	mV/A		10		SHK-VBS-TE-200-S2
Load resistance	R_L	k Ω	10			
Ratiometricity error	ϵ_r	%		± 0.5		@ $4.75\text{ V} \leq V_{CC} \leq 5.25\text{ V}$
Sensitivity error	ϵ_G	%		± 1		@ $T_a = 25^{\circ}\text{C}$
Electrical offset voltage error	V_{OE}	mV		± 4.0		@ $T_a = 25^{\circ}\text{C}$, $V_{CC} = 5.0\text{ V}$
Magnetic offset voltage error	V_{OM}	mV		± 5.0		@ $T_a = 25^{\circ}\text{C}$, $V_{CC} = 5.0\text{ V}$
Ave. Temp. coefficient of V_{OE}	TCV_{OEAV}	mV/ $^{\circ}\text{C}$	-0.15	± 0.1	0.15	@ $-40^{\circ}\text{C} < T_a < 85^{\circ}\text{C}$
Ave. Temp. coefficient of S	TCS_{AV}	%/ $^{\circ}\text{C}$		± 0.015		@ $-40^{\circ}\text{C} < T_a < 85^{\circ}\text{C}$
Linearity error	ϵ_L	% I_P	-1		1	
Response time	T_r	μs		4	6	@ 90% of I_{PM}
Frequency bandwidth (-3 dB)	BW	kHz	40			No RC circuit
Output voltage noise	V_{no}	mVpp		20		@ DC ~ 10 kHz

Overall accuracy X specification						
$I_{PM}(A)$	@ $T_a=25^{\circ}C$, $V_{CC}=5.0V$			@ $-40^{\circ}C \leq T_a \leq 85^{\circ}C$, $V_{CC}=5.0V$		
-200	35mV	3.50A	1.75%	50mV	5.00A	2.50%
0	15mV	1.50A	0.75%	21.5mV	2.15A	1.075%
200	35mV	3.50A	1.75%	50mV	5.00A	2.50%

SHK-VBS-TE-200-S2: Overall accuracy X @ $V_{CC} 5V$ ($-40^{\circ}C \leq T_a \leq 85^{\circ}C$)

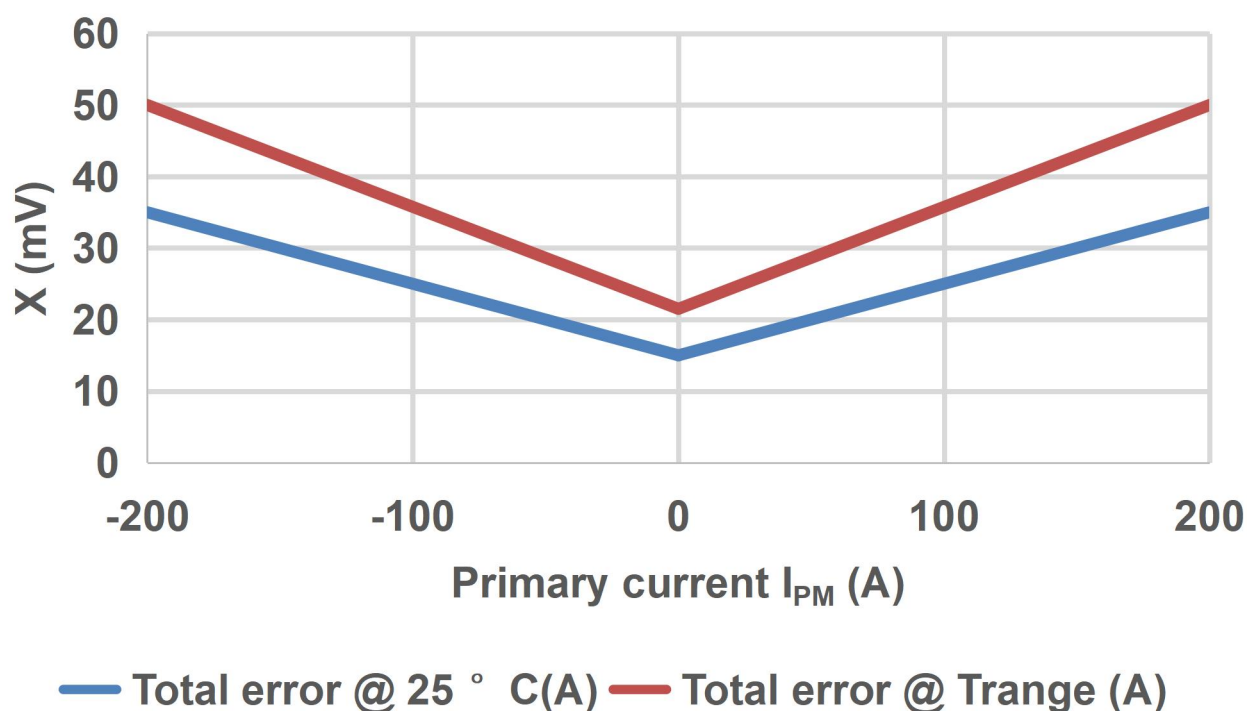

3. Dimension & Pin definitions

