


Current Sensor

Product Series: SHK-VBS3/S2

SHK-400VBS3/S2 & SHK-500VBS3/S2 &
SHK-600VBS3/S2 & SHK-700VBS3/S2 &

Part number: SHK-800VBS3/S2 & SHK-900VBS3/S2

VERSION: Ver 1.0

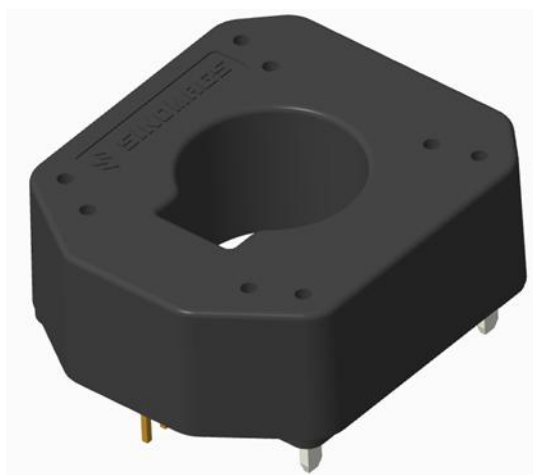

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1. Introduction	2
2. Electrical Data	3
3. Dimension & Pin Definitions	6

1. Introduction

The SHK-VBS3/S2 series current sensor is based on Hall technology, and it has an open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Motor driver
- Electric welder power supply

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T _A	°C	-40 ~ 125
Storage temperature	T _{stg}	°C	-40 ~ 125
Mass	m	g	30

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage (not-destructive)	V _{CC}	V	6
ESD rating (HBM)	U _{ESD}	kV	4

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	4	
Case material			V0 according to UL 94	


2. Electrical Data

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 3.3\text{ V OR }5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment	Conditions
Primary nominal current	I_{PN}	A		400		SHK-400VBS3/S2	
				500		SHK-500VBS3/S2	
				600		SHK-600VBS3/S2	
				700		SHK-700VBS3/S2	
				800		SHK-800VBS3/S2	
				900		SHK-900VBS3/S2	
Current range (refer remark)	I_{PM}	A	-400		400	SHK-400VBS3/S2	
			-500		500	SHK-500VBS3/S2	
			-600		600	SHK-600VBS3/S2	
			-700		700	SHK-700VBS3/S2	
			-800		800	SHK-800VBS3/S2	
			-900		900	SHK-900VBS3/S2	
Supply voltage	V_{CC}	V		$5 \pm 5\%$		SHK-400VBS3/S2 SHK-500VBS3/S2 SHK-600VBS3/S2 SHK-700VBS3/S2 SHK-800VBS3/S2 SHK-900VBS3/S2	
Current consumption	I_{CC}	mA		15		All	@ $T_A = 25^{\circ}\text{C}$, @ $U_C = 5\text{ V}$
Quiescent voltage $V_{out} @ 0\text{ A}$	V_{off}	V	$V_{CC}/2 - 0.025$	$V_{CC}/2$	$V_{CC}/2 + 0.025$	SHK-400VBS3/S2 SHK-500VBS3/S2 SHK-600VBS3/S2 SHK-700VBS3/S2 SHK-800VBS3/S2 SHK-900VBS3/S2	@ U_C
Peak output voltage ($V_{out} @ \pm I_{PM}$) – V_{off}	V_{FS}	V		± 2		SHK-400VBS3/S2 SHK-500VBS3/S2 SHK-600VBS3/S2 SHK-700VBS3/S2 SHK-800VBS3/S2 SHK-900VBS3/S2	@ $T_A = 25^{\circ}\text{C}$, @ $U_C = 5\text{ V}$
Internal output resistance	R_{out}	Ω		5		V_{out}	DC to 1KHz



Theoretical gain (Typ)	G _{th}	mV/ A		5		SHK-400VBS3/S2	@U _c =5 V
				4		SHK-500VBS3/S2	@U _c =5 V
				3.33		SHK-600VBS3/S2	@U _c =5 V
				2.85		SHK-700VBS3/S2	@U _c =5 V
				2.5		SHK-800VBS3/S2	@U _c =5 V
				2.22		SHK-900VBS3/S2	@U _c =5 V
Rated linearity error	Non-L	% I _{PN}		± 1		±I _{PN}	@T _A =25°C
Step response time	t _{res}	μs		3.5		@90% of I _{PN}	di/dt=100A/μs
Frequency bandwidth (-3dB)	BW	kHz		100		No RC circuit	@ -3dB
Output voltage noise DC ~ 10 kHz DC ~ 100 kHz	Vnoise	mVp p		10 20		SHK-400VBS3/S2 SHK-500VBS3/S2 SHK-600VBS3/S2 SHK-700VBS3/S2 SHK-800VBS3/S2 SHK-900VBS3/S2	@14KHz noise filter @140KHz noise filter
Accuracy @ 25°C	X	% of I _{PM}		± 1		All	@U _c =5 V
Accuracy @ -40°C ~ 125°C	X _{TRange}	% of I _{PM}	-3.5		3.5	All	@U _c =5 V

Note:

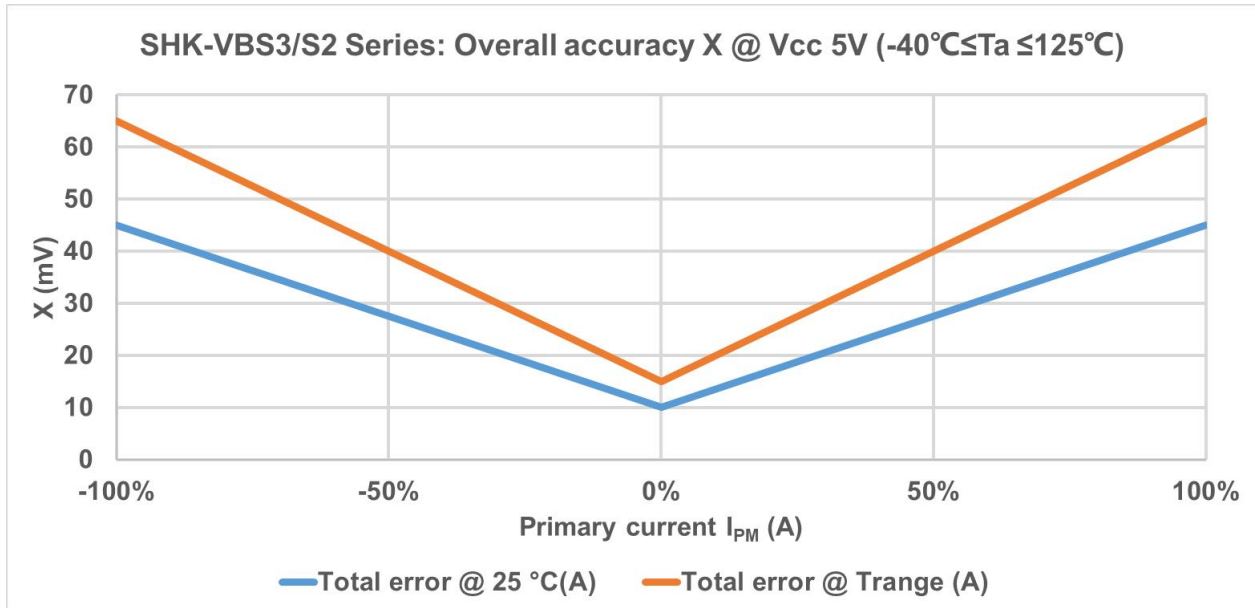

Overall accuracy X specification		
I_{PM}	@Ta=25C°, VCC=5.0V	@-40C°≤Ta≤125C°, VCC=5.0V
-100%	45mV	65mV
0%	10mV	15mV
100%	45mV	65mV

3. Dimension & Pin Definitions

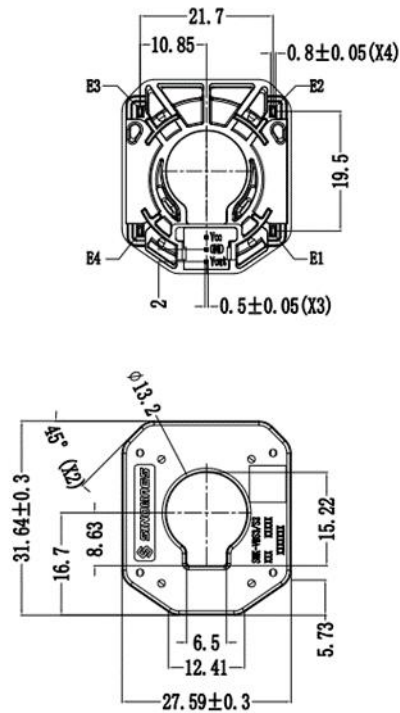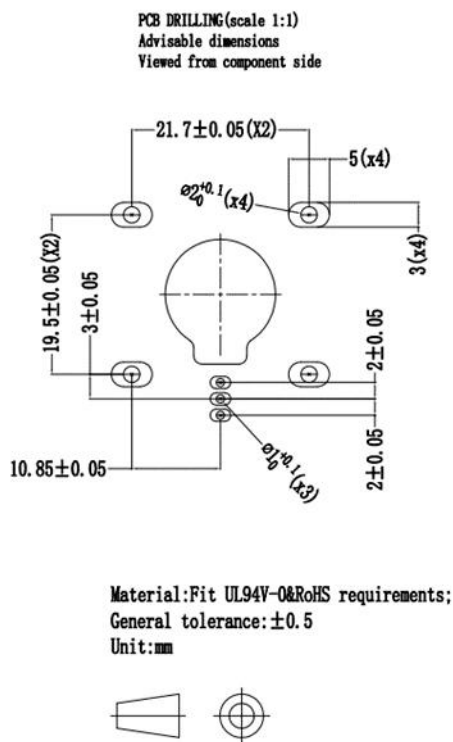

Terminals	Designations
1	Vcc
2	GND
3	Vout
E1-E4	GND

