


Current Sensor

Product Series: SHK-VBS-T

Part number: SHK-VBS-TA-700-S2

Version: Ver 1.8

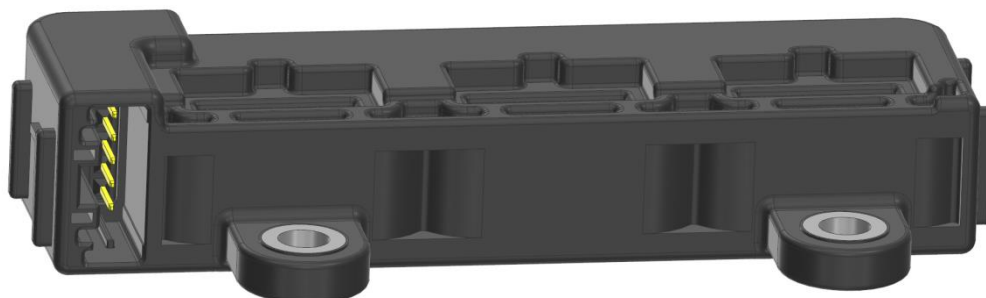

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1. Description.....	2
2. Electrical data.....	3
3. Product definition statement	5
4. Electrical circuit diagram	5
5. Dimension & Pin definitions	6
6. Environmental test.....	7
7. Important notice	7

1. Description

The SHK-VBS-TA current sensor is based on Hall and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- Electrical Power Steering
- Motor drive application
- Converters
- Battery Management

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_j	$^{\circ}\text{C}$	-40 ~ 150
Storage temperature	T_{stg}	$^{\circ}\text{C}$	-40 ~ 150
Mass	m	g	60

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V_{CC}	V	-0.3 ~ 10 (Not operating)
			6.5
Electrostatic discharge voltage	U_{ESD}	kV	8 (HBM)

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
Insulation voltage	U_d	kV	2.5	RMS voltage for AC test 50Hz/1 min
Insulation resistance	R_{is}	M Ω	500	DC 1kV/1 min
Clearance distance (pri. -sec)	d_{Cl}	mm	8.0	Shortest distance through air
Creepage distance (pri. -sec)	d_{Cp}	mm	8.0	Shortest path along device body
Comparative tracking index	CTI		PLC 3	
Case material			V0 according to UL 94	



Selection Guide

Product	Nominal current	Measuring range
SHK-VBS-TA-700-S2	700 A	700 A

2. Electrical data


Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary current measuring range	I_{PM}	A	-700		700	SHK-VBS-TA-700-S2
Supply voltage	V_{CC}	V	4.75		5.25	
Current consumption	I_{CC}	mA		39	45	@ $V_{CC} = 5.0\text{ V}$
Output voltage	V_{OUT}	V	$(V_{CC}/5) \times (V_{off} + G \times I_{PM})$			@ $T_j = 25^\circ\text{C}$
Quiescent voltage	V_{off}	V	2.49	2.5	2.51	@ $T_j = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Sensitivity	G	mV/A		2.857		@ $T_j = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Load resistance	R_L	k Ω	10		100	
Ratiometricity error	ϵ_r	%	-0.5		0.5	@ $4.75\text{V} \leq V_{CC} \leq 5.25\text{V}$
Sensitivity error	ϵ_G	%	-0.75		0.75	@ $T_j = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Magnetic offset voltage error	V_{OM}	mV	-3	± 2	3	@ $T_j = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$, after $\pm I_{PM}$
Ave. Temp. coefficient of V_{OE}	TCV_{OEAV}	mV/ $^\circ\text{C}$	-0.15	± 0.05	0.15	@ $-40^\circ\text{C} \leq T_j \leq 150^\circ\text{C}$
Ave. Temp. coefficient of G	TCG_{AV}	%/ $^\circ\text{C}$	-0.025	± 0.01	0.025	@ $-40^\circ\text{C} \leq T_j \leq 150^\circ\text{C}$
Linearity	ϵ_L	%	-0.75	± 0.35	0.75	@ $T_j = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$, $I = I_{PM}$
Response time	T_r	μs		2	5	@ 90% of I_{PM}
Frequency bandwidth (-3 dB)	BW	kHz	40			No RC circuit
Output voltage noise	V_{no}	mVpp		20		@ DC ~ 10 kHz
Power on delay	T_{POD}	ms			1	

Total error(mV) for $\leq 700\text{A}$

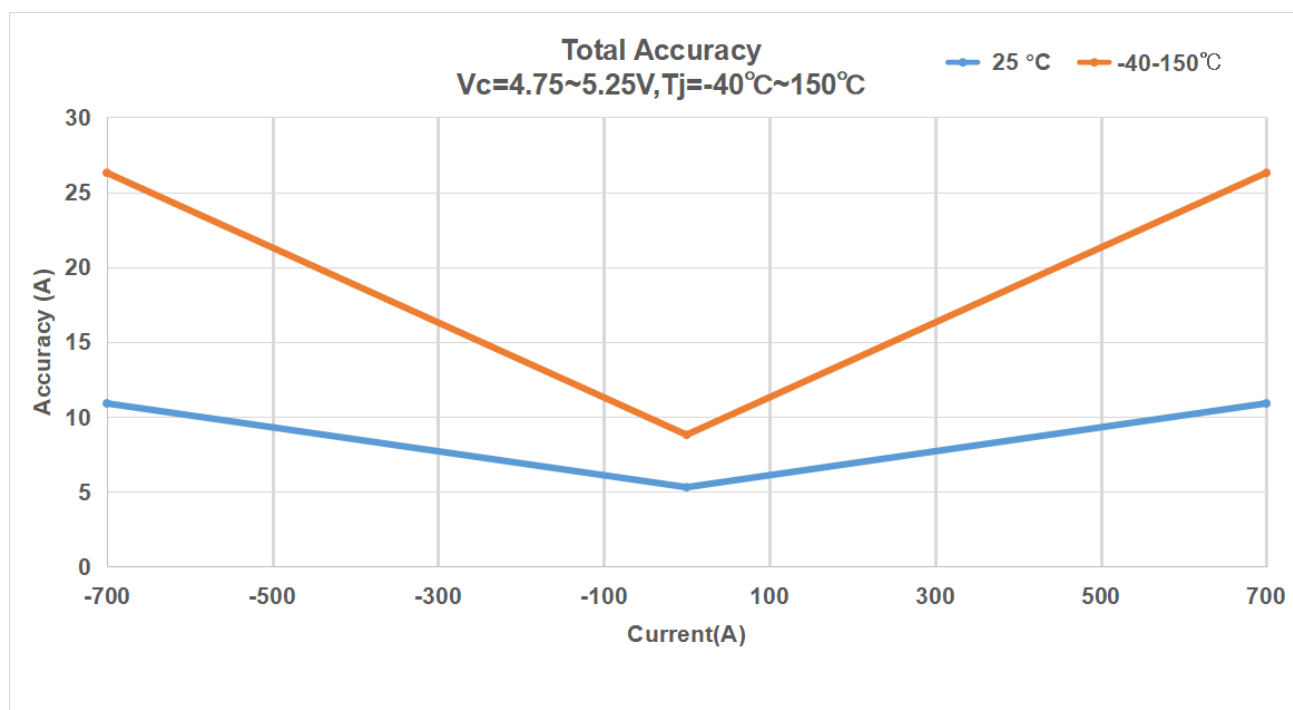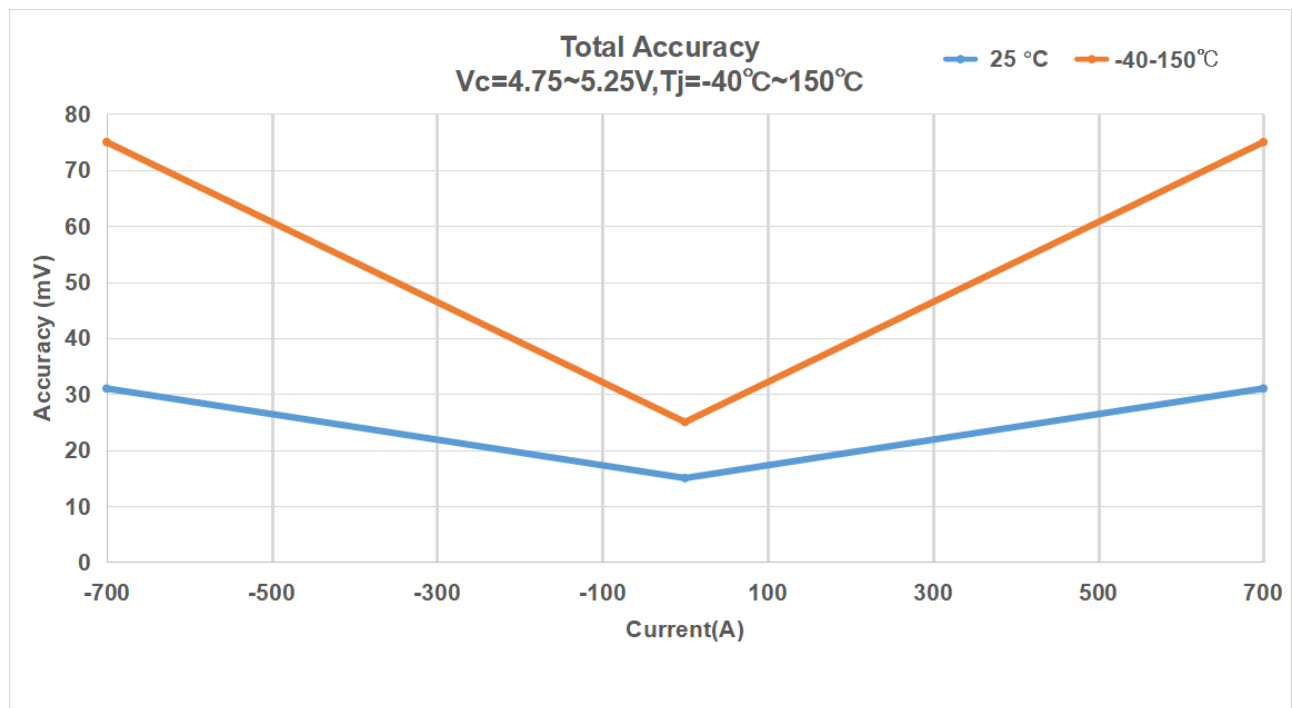


Accuracy	Specification			Unit	Note	Accuracy	Specification			Unit	Note
	- 700A	0A	700A				- 700A	0A	700A		
25°C	31.0	15.0	31.0	mv		25°C	10.9	5.3	10.9	A	
-40°C~125°C	63.0	23.0	63.0	mv		-40°C~125°C	22.1	8.1	22.1	A	
-40°C~150°C	75.0	25.0	75.0	mv		-40°C~150°C	26.3	8.8	26.3	A	

3. Product definition statement

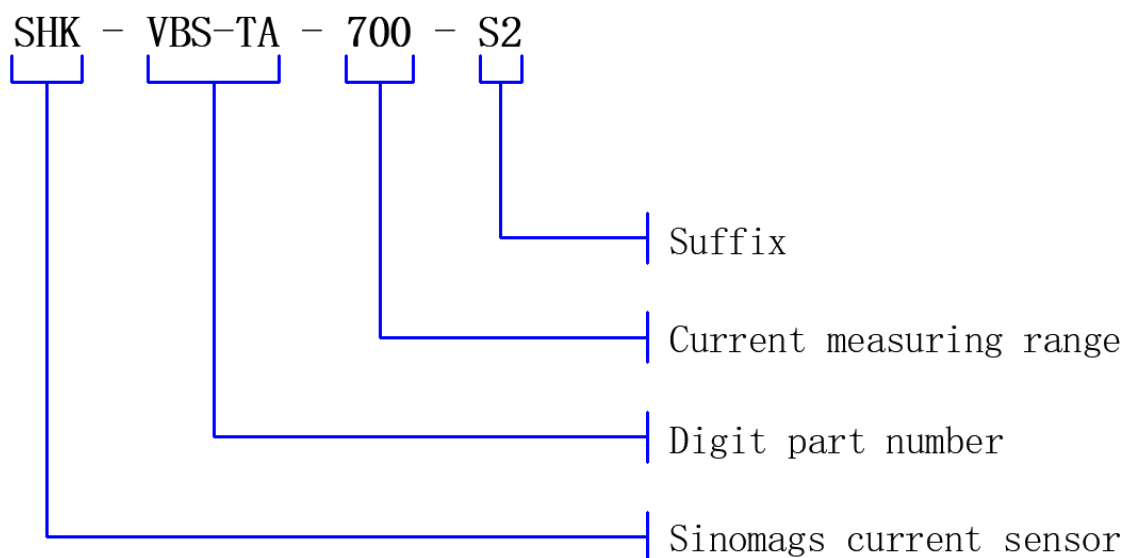

4. Electrical circuit diagram

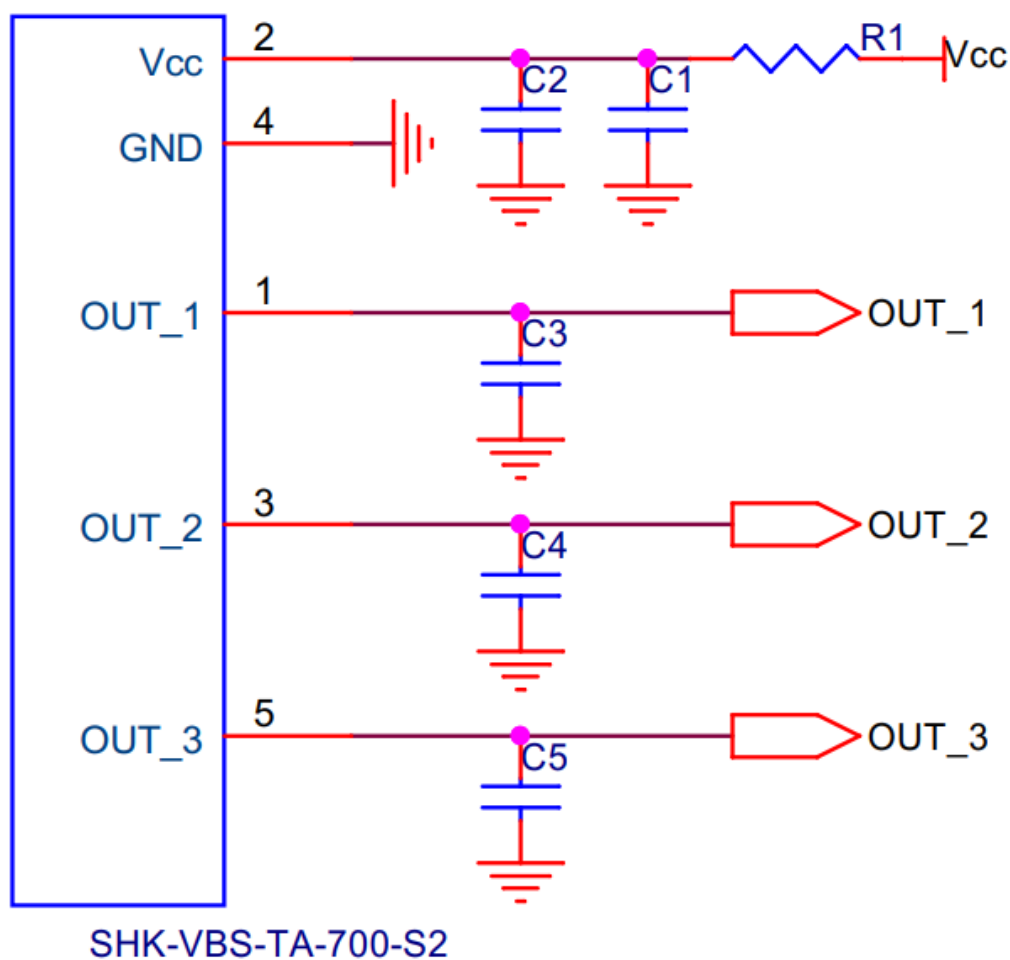

6. Environmental test

Name	Test condition
Environmental tests, electrical tests	
Humidity test	85℃/85%,1000hr
Thermal shock	-40℃/125℃, 1000cycles
High temperature test	125℃, 1000hr
Low temperature test	-40℃, 1000hr
Insulation voltage	2.5kV, 50Hz, 1min
Insulation resistance	DC1000V, 1min
Mechanical tests	
Vibration test	GB/T 28046.3-2011
EMC tests	
Interference immunity to mobile radio communications	ISO 11452-9:2021
ESD electro static discharge_ Packaging and handing	ISO 10605:2023
ESD electro static discharge, direct discharge	ISO 10605:2023

7. Important notice

This datasheet and any information contained therein may not be reproduced in whole or in part without the prior permission from Sinomags. The content of this information may be changed without notice for purposes such as improvement. Make sure you have the latest information when using the current sensor.